



LIVEPRO L1 Upgrade Guideline

(Use XTOOL)

Add: No.9A, Fuxing Industrial Park, No.9th, Jinmin Road, Jinfeng Development Zone, Zhangzhou, Fujian, China

Tel: +86- 596- 2672627

Fax: +86- 596- 2672617

E-mail: sales@feelworld.cn

Website: www.feelworld.cn

www.seetec.cn

Operation Steps:

1. Prepare tool:


Upgrade package, XTOOL V1.0.1.9, upgrade cable.



2. Upgrade Method: LAN port upgrade


2.1 Turn on the power on LIVEPRO L1 and use LAN cable to connect device.

2.2 The default IP is 192.168.0.100, so make sure the PC and device are in the same IP segment. As the picture show to check if your PC in the same IP segment.

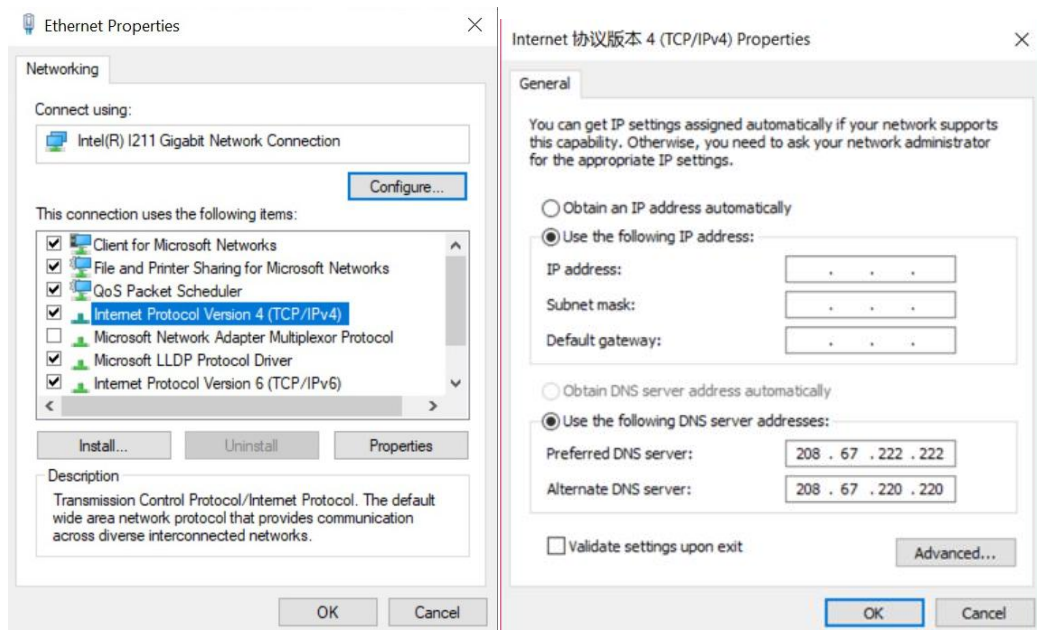



2.3 Open the upgrade tool XTOOL , click Connection

2.4 Choose Net Comm in pop up window and confirm

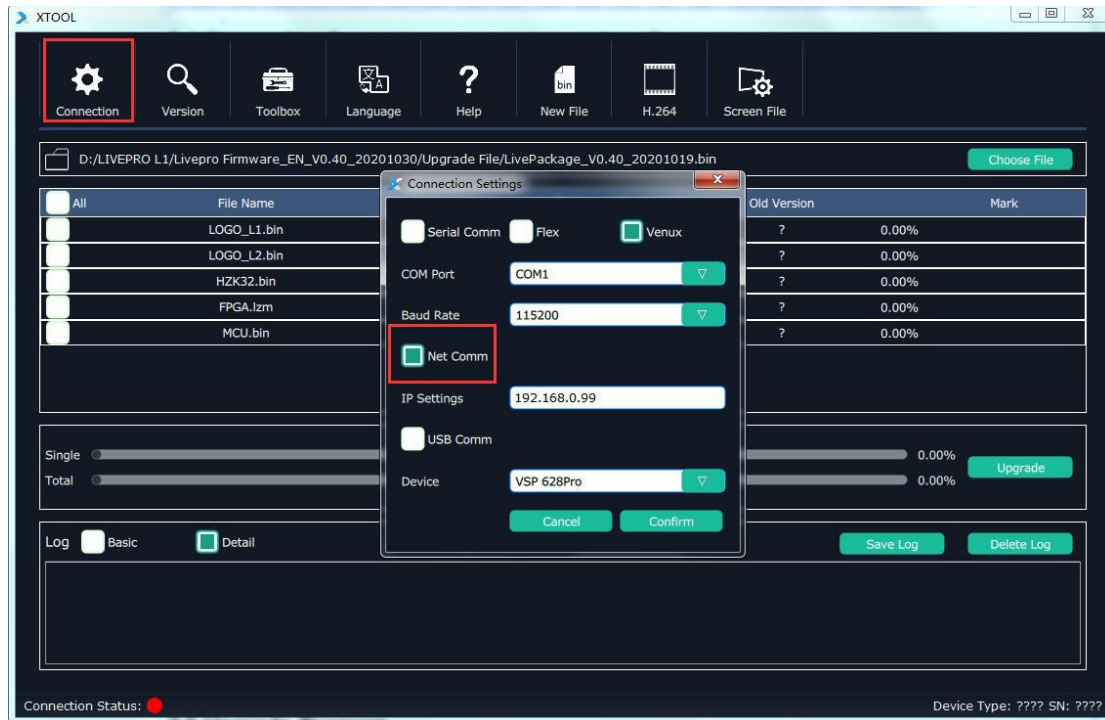

2.5 Upgrade Program

After communication setting is done, the status light in bottom left turns green. Choose the upgrade file and open it. Usually, choose MCU or FPGA bin file to upgrade. After selecting, click upgrade.

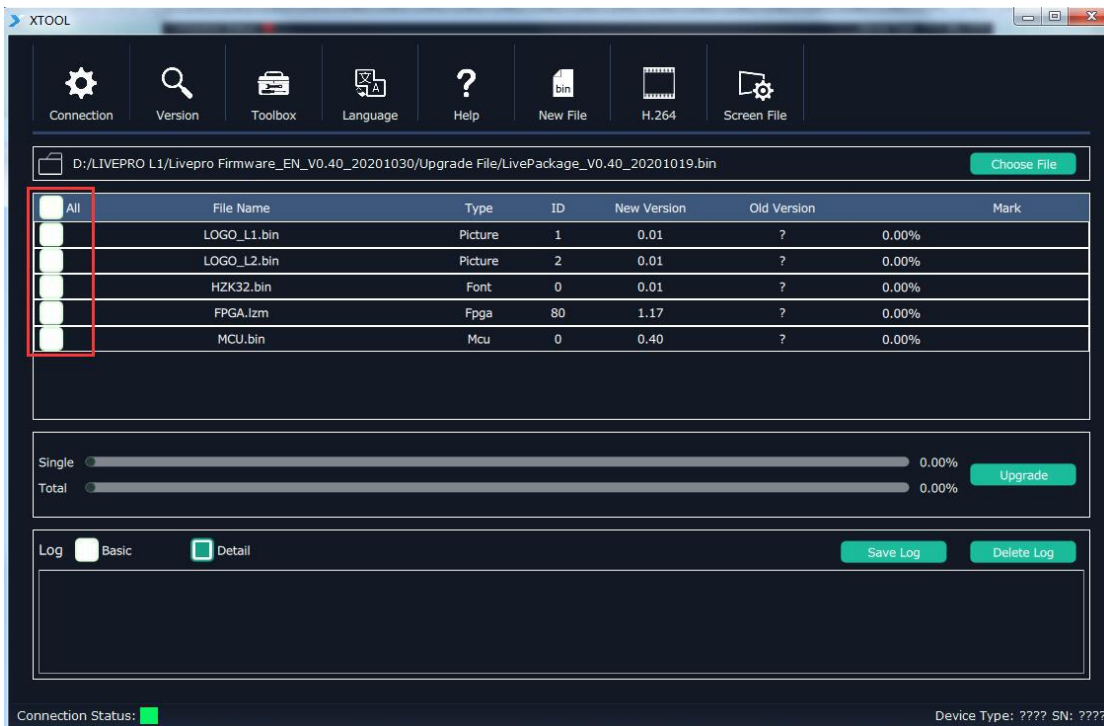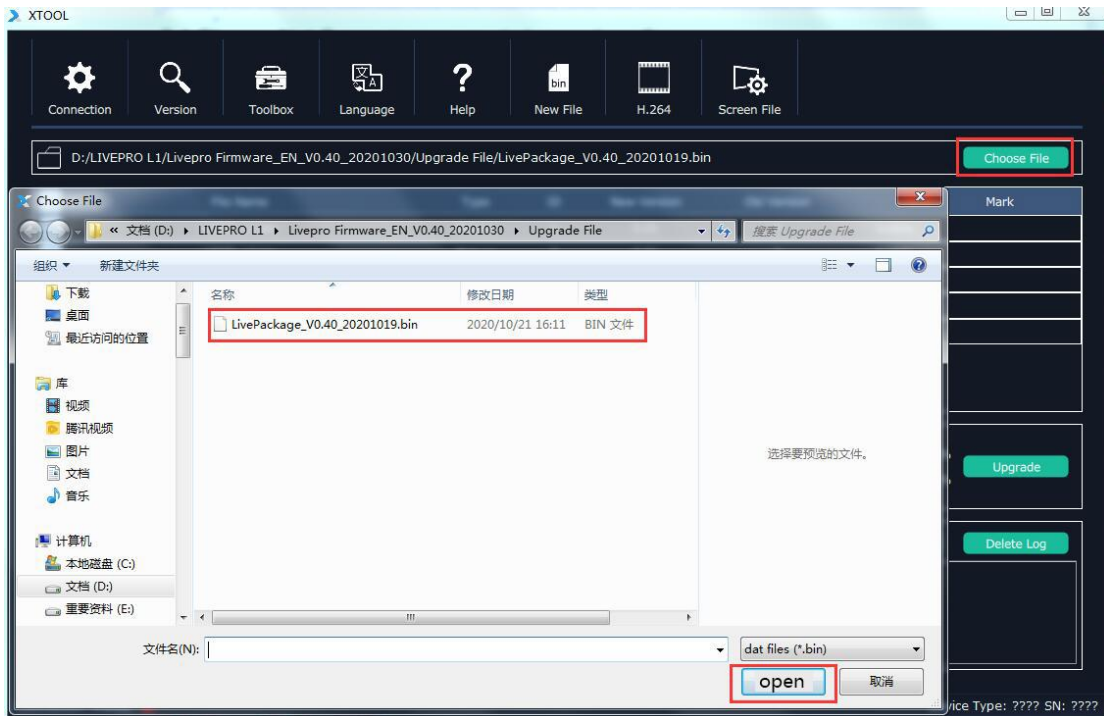

Add: No.9A, Fuxing Industrial Park, No.9th, Jinmin Road, Jinfeng Development Zone, Zhangzhou, Fujian, China

Tel: +86- 596- 2672627


Fax: +86- 596- 2672617

E-mail: sales@feelworld.cn


Website: www.feelworld.cn

www.seetec.cn

2.5.1 During the process of upgrading, each upgrading status and upgrade result of each program file is showing.

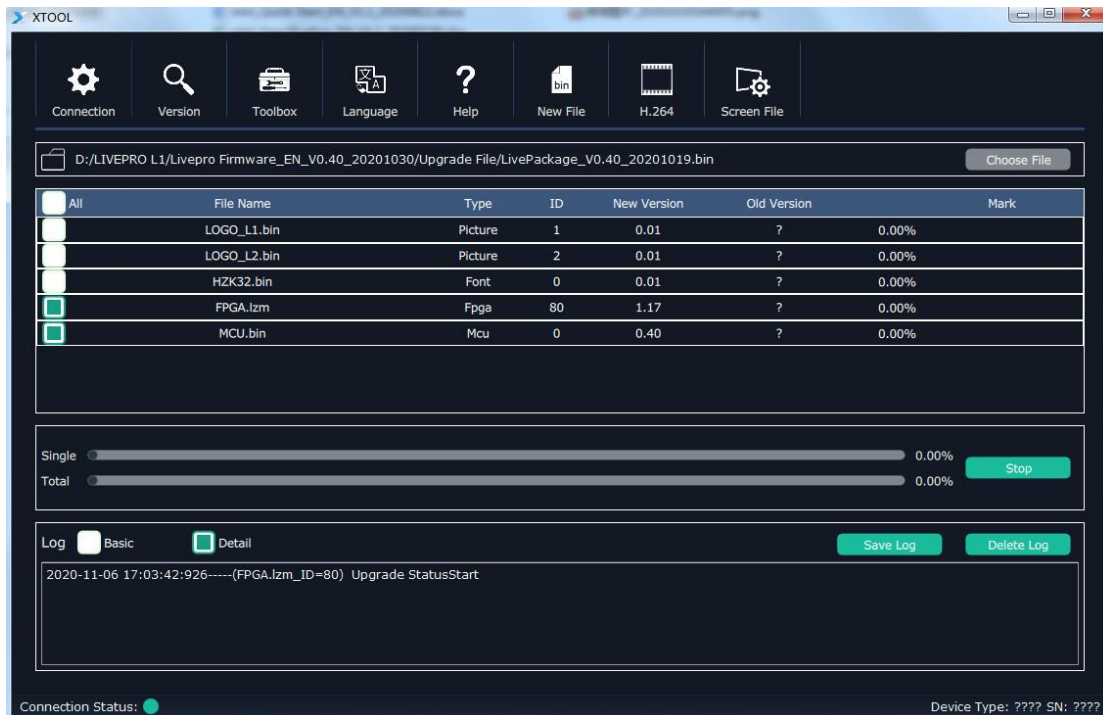

2.5.2 After upgrade is done, there will pop up a window showing “New Version Upgraded” then then users need to reboot the device to let the new version take effect.

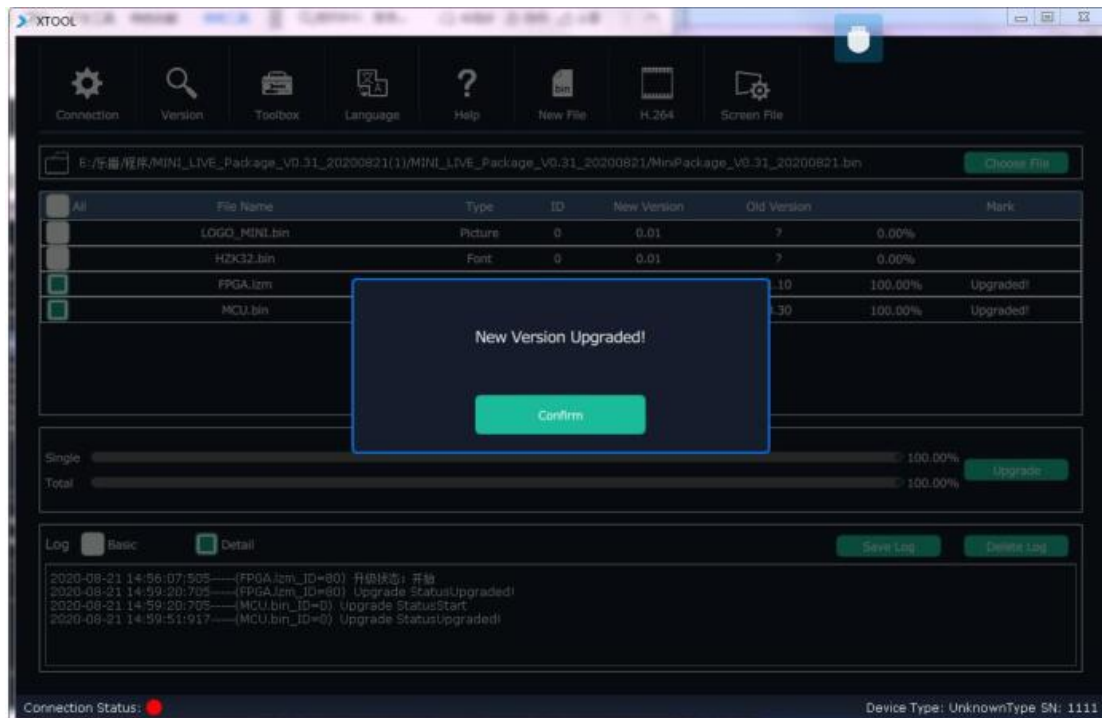

2.5.3 Click “Version” XTOOL will show the latest version info of the device so that users can check if the upgrade is successful or not.

