



If you have any questions, please contact us at SC@yoomail.com or scan the qr code above to view the instruction video.

1.Download the APP

Search for Tuya Smart in APP store or Google Play or Scan the QR Code below to download.



Scan QR Code to download



IOS






Android

2. Register/Log in with exsiting account

2.1.Register

If you don't have account yet you can register an account.Click "Creat New Account " and read the Privacy Policy on APP ,click agree to enter the registration page for Mobile (only support China mobile numbers) or Email address to get the verify code to finish the registration.

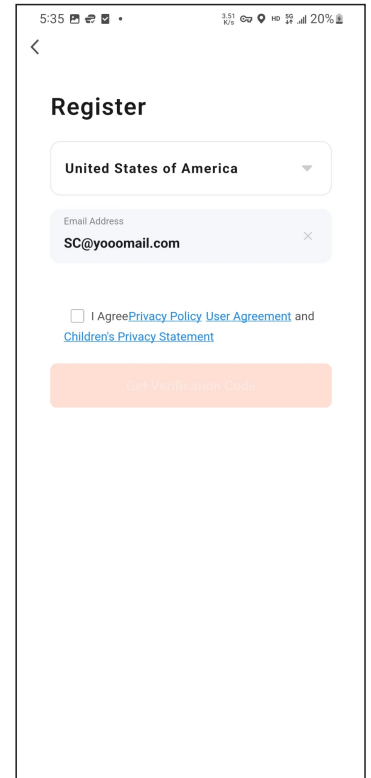
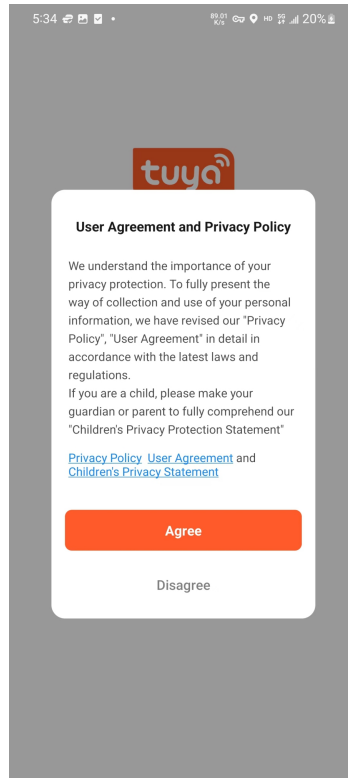
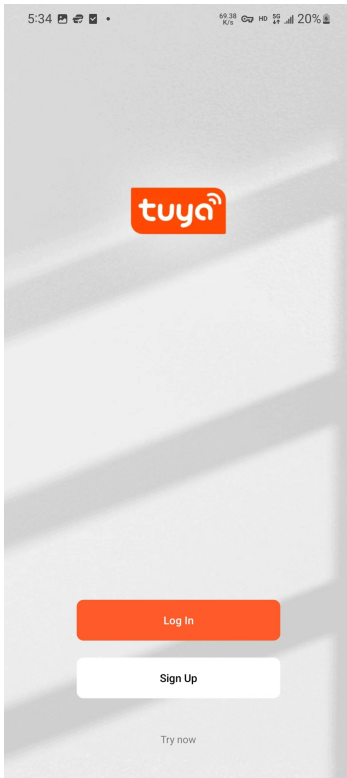


2.2. Login with existing account

If you already have an account click “Log in with existing account”

(1) The system automatically select the current Country/Region or you could manually select the Country/Region.


(2) Enter your registered mobile number or email address ,enter the password to log in the APP.

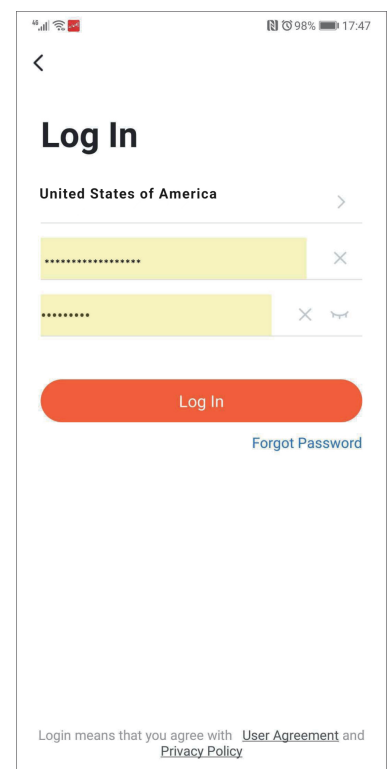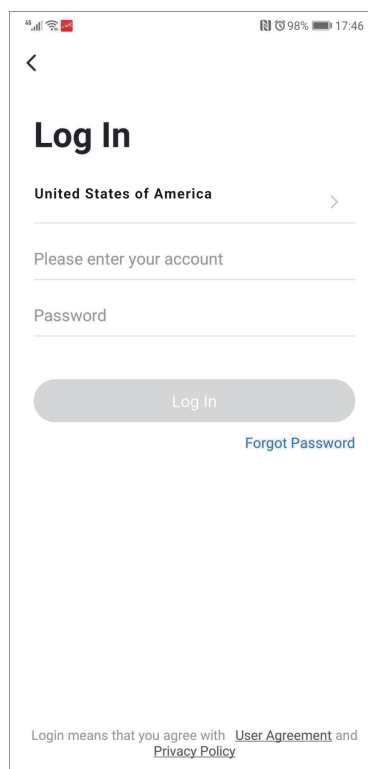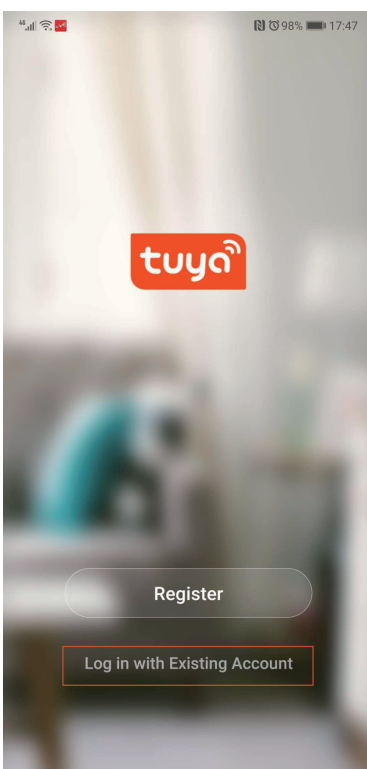

3. Add devices

3.1. QR Code Conenction


Tips: The devices only support 2.4GHz wifi currently not 5GHz wifi . And the WIFI password should not contain any special characters eg. !@#\$%^&*() when configuring please put your phone and devices as closer as possible. Power on the camera ,you will hear the broadcast “Wait for wifi configue” If you heard nothing at all kindly reset the camera to factory settings.

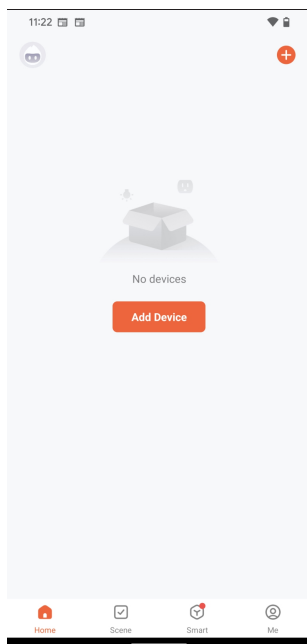


Tap “+” or “Add Device” to add device




Tap "Security"-Smart camera(Wi-Fi)

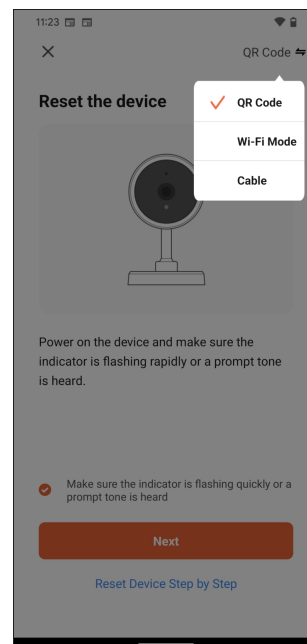


Default is QR Code mode and Tap next step

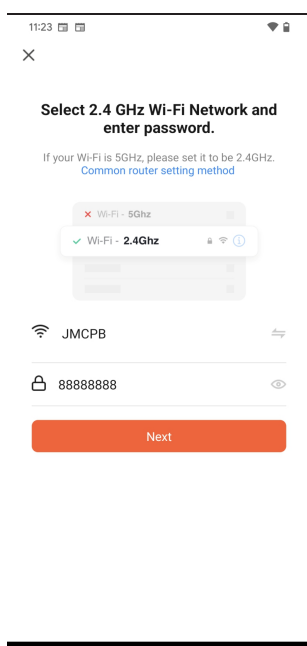

Input the 2.4GHz wifi name and password

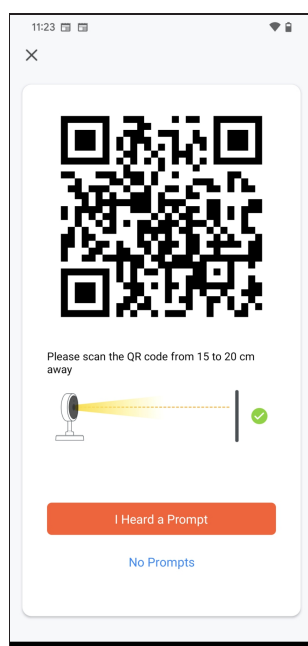


The camera zooms in on the QR code on the phone

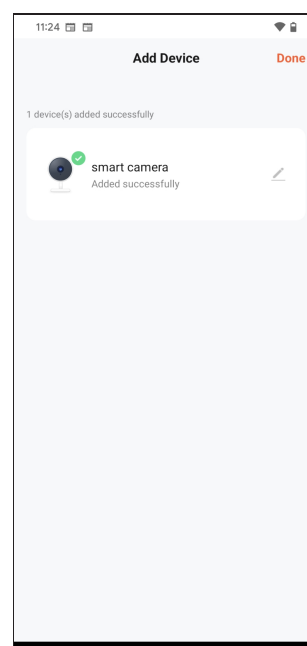

Add device Succeeded

4. APP Settings

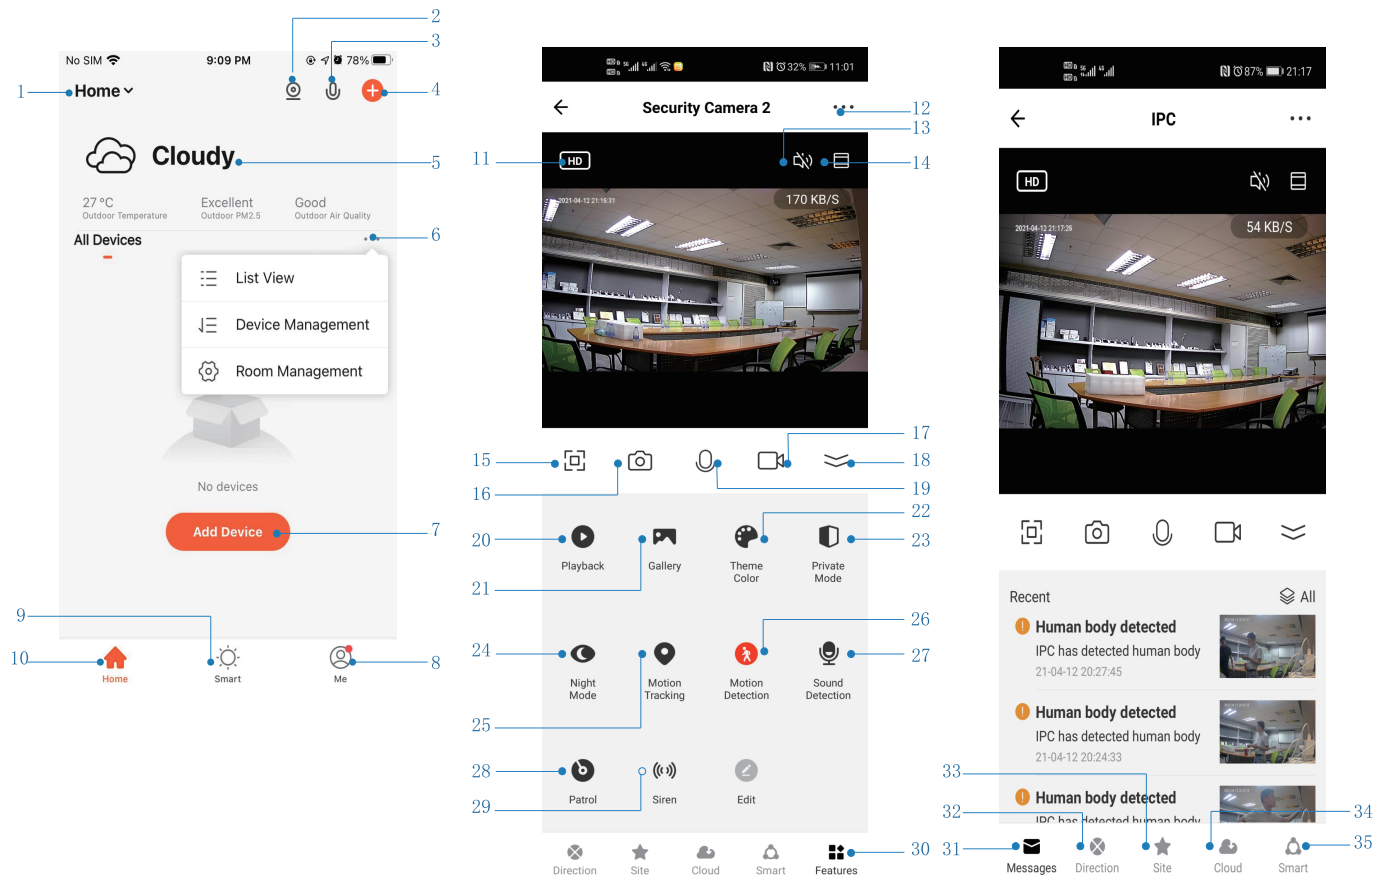

1.Family Management

2.Camera Multiview

3.Voice control entrance

4.Add a new device

5.Local information

6.Display management

7.Add a device first time

8.Me(Personal Information:Home Management; Motion Detection Message Center;FAQ &Feedback;More Services;Settings)

9.Smart Scene with conditions or other tuyu smart devices like alarm,light , controller etc.

10.Home device list

11.SD/HD switch

12.Camera Setting

13.Sound option(Speaker) open listening

14.Vertical Full Screen

15.Horizontal Full Screen

16.Camera snapshot (save image on phone)

17.Manually record(record videos on phone)

18.Collapse the menu

20.Playback the recordings

19.Talk button (Press to talk to the camera)

20.Playback the recordings

21.Photo album

22.Theme color (Light mode and dark mode)

23.Private Mode(Camera display turn off on app)

24.Night Mode (Smart Mode: IR on in night when motion happen white light on/Infared Mode: only IR works /Color Light Mode: White light always on)

25.Enable Auto tracking to follow the movement

26.Motion detection alarm (Send alarm notifaction if any movement detected)

27.Sound Detection (Send alarm notifaction if any sound detected)

28.Patrol (Panoramic patrol to move every angle Site Patrol will patrol all sites and stay at each sites for 10s)

29.Srien alarm (To make alarm sound to scare the suspicious person)

30.Camera features page

31.Message (Alarm message page to show when there is motion or sound detected)

32.Direction(To control camera directions)


33.Site (Preset can be stored max 6sites.

When you click the site the camera will move to the place automatically)


34.Cloud Service (Offer by tuyu with AWS cloud service to record videos on cloud)

35.Smart (Different from home page ,this smart is to set only camera smart actions)



5. Camera Settings

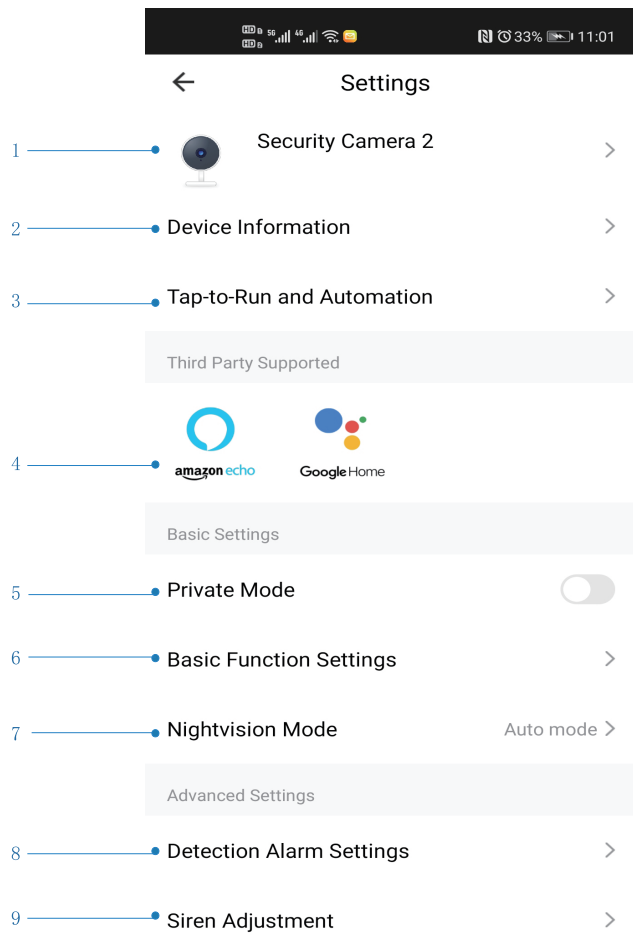

1. Camera name you can edit by yourself the name and change the ICON and set location




2. Device information include owner IP address, Device ID, Time Zone, WiFi Strength

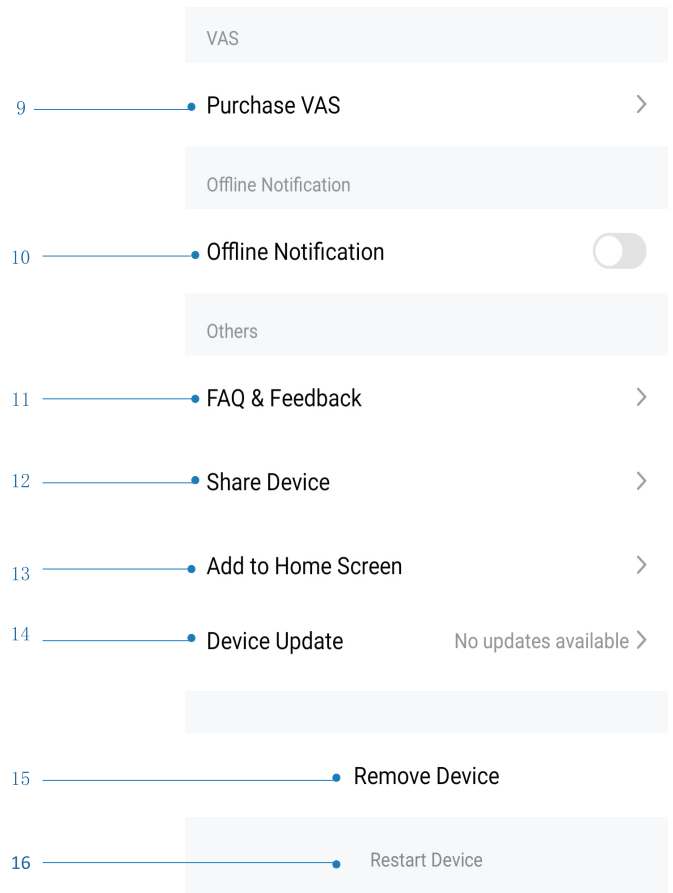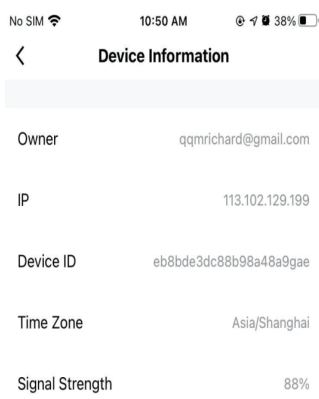


3. Tap to run the scenes or automations created

4. This product does not support this function

5. Private Mode (Turn off the camera display on app)

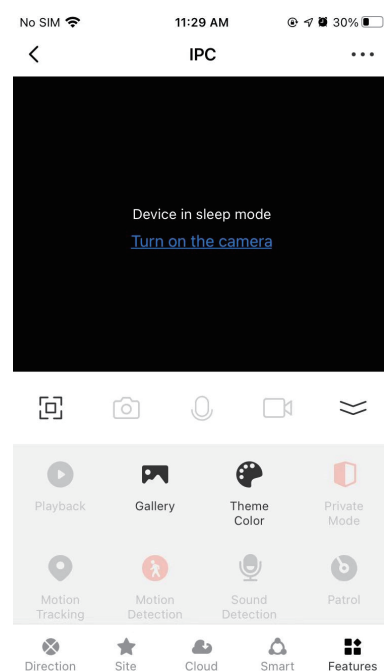


6. Basic function contact Flip screen, Time watermark and can choose talk mode to one way or two way talk




7. Night Mode (Smart Mode: IR on in night when motion happen white light on/Infared Mode: only IR works /Color Light Mode: White light always on)

8. Detection Alarm run motion detection and Auto Tracking, Alarm Sensitivity Level, Activer Area, Human Boday Filtering Sound Detection and Schedule etc (For PT camera only)

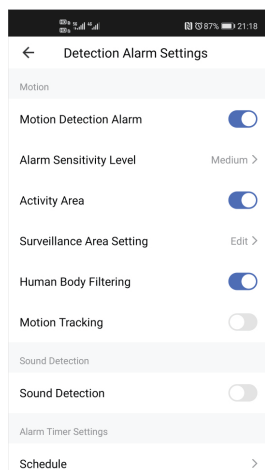

a. Alarm sensitivity level high means long distance and low means near distance.

b. Surveillance Area Setting: To set the area want to triggle motion alarm.

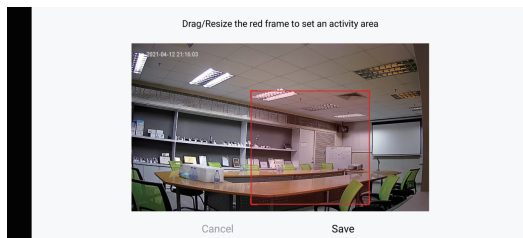


c. Human Body filtering : Only alarm if camera detect human shape.


d. Motion Tracking : Auto tracking people or moving object.

e. Sound Detection: Enable sound detection alarm.


f. Schedule: To add alarm schedule.

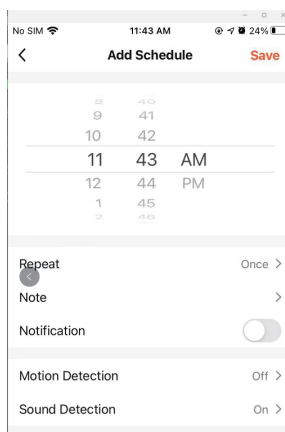

9. Siren Adjustment: To adjust the volume and druation of the siren.



10. Tuya VAS service like cloud storage

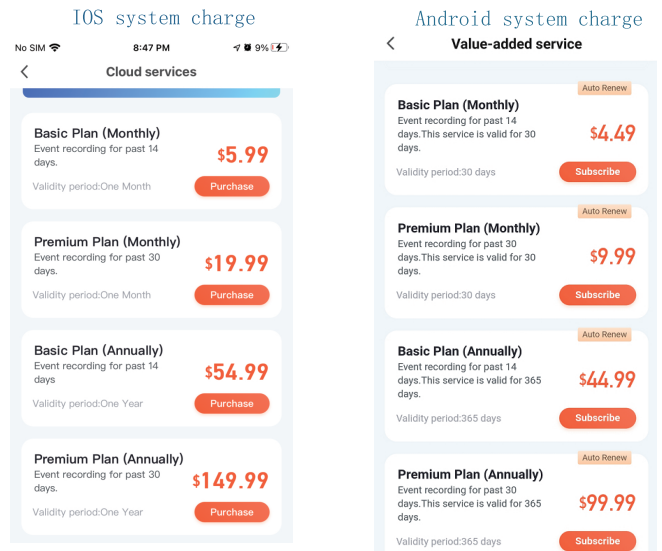


11. Offline Notification: When device offline send notifications message. IOS system charge Android system charge.


12. FAQ and feedback : Generally questions about tuya cameras.

13. Share Device: Share the device to your family or friend (Need the account in same area)

14. Add to Home Screen: Add a short cut of the camera to the homepage.

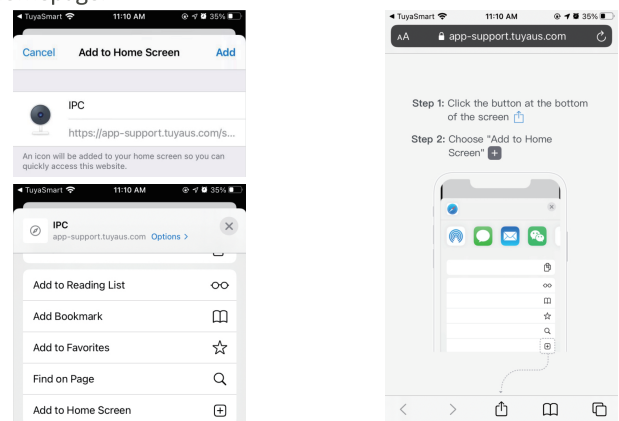


15. Device update : If there is any upgrade will have notification here. you can also choose auto upgrade so the camera will upgrade automatically



16. Remove device: When you want to delete or change wifi of the camera please choose remove to unbid the camera from the account.

17. Restart Device: Restart the device remotely

6. Installation

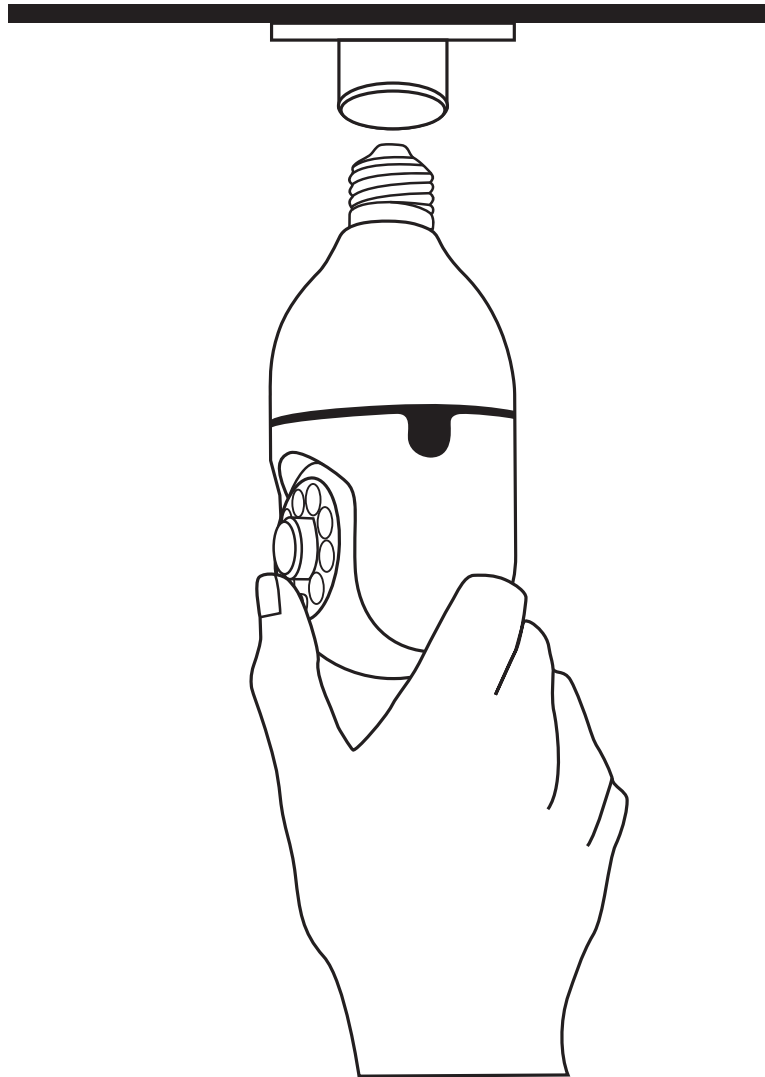

7. FAQ

As mentioned that in the camera settings there are FAQ page and you could also read the Q&A below to have a brief understanding of the common issues.

Q1: How do I reset my camera to factory settings ?

A1: Delete the camera from your app list directly or long press the reset button for 8s until you hear the voice “Reset ,camera reboot”

Q2: I have select the 2.4GHz WI-FI and input password correctly why does the camera still not connected to Wi-Fi?

A2: (1)Please make sure the network you used is the same one for your phone and the camera .

(2)Please make sure your Router enable DHCP you could login the router settings to check .If it's disabled the camera will not get ip and fail.

(3)Please press the reset button for 8s to restart the camera .

(4)Please make sure the Wifi signal intensity is over 80%.

Q3: How do I change the camera from one router to another?

A3: First delete the camera from your app list or long press the reset button for 8s . Then configure the camera again.

Q4:Why SD card can't be recognized? After a period the video and cycle videos can not be recorded?

A4: Please check the camera settings and make sure you set up the camera to record on SD card. And currently support 128GB SD card do not exceed. And please make sure the SD card is not damaged and support only FAT32 .

Q5: Why i can't recieve the alarm information when i see device online and has an motion detection event ?

A5: Please make sure you have enable the push notification from the Tuya Smart APP. And please enable alarm notification on app .

Q6: How do i access the camera on WEB ?

A6:Open the page <https://ipc.ismartlife.me/login> and use your own Tuya app to scan the the QR code then you will see the camera on IE.

