





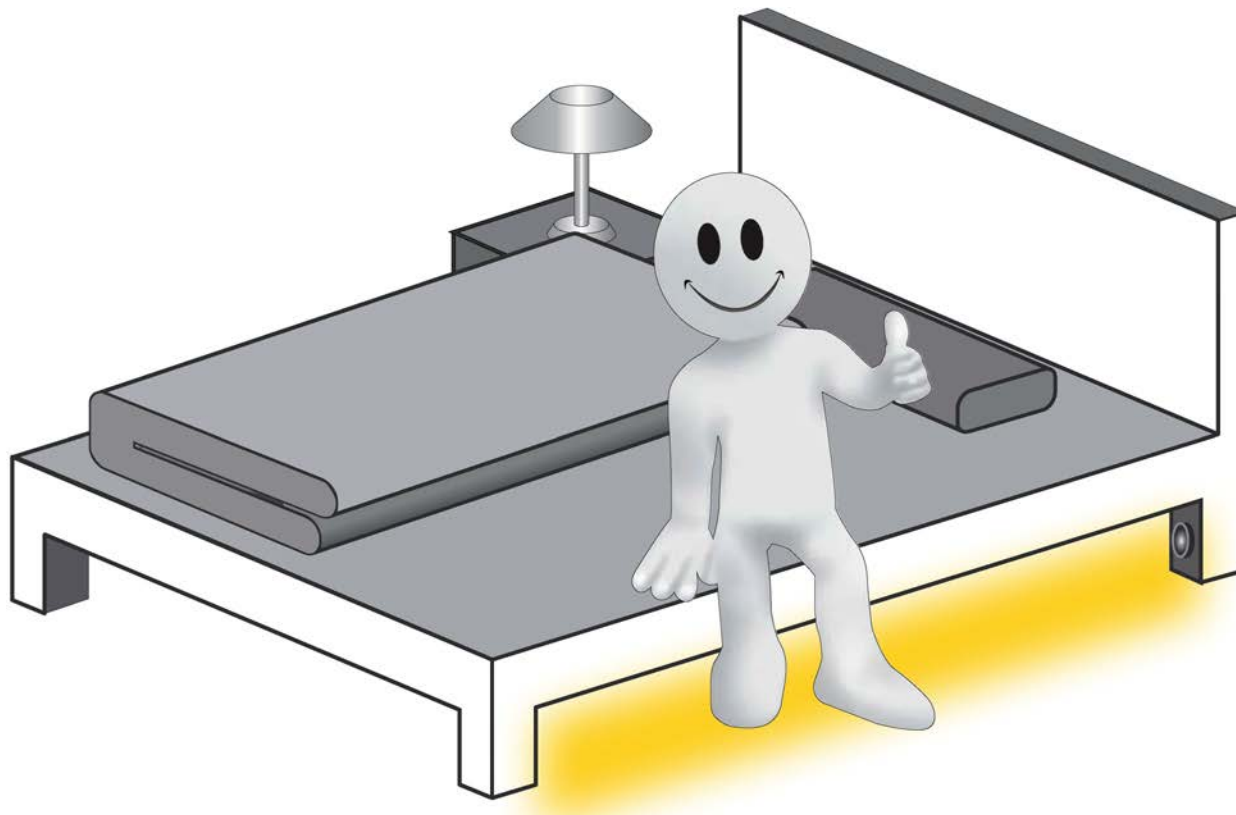


LED Sensor Light	002-007
LED Night Light	008-012
LED Cabinet Light	013-027
LED Ambient Light	028-039
LED RGB Whip Light	040-040
LED Camping Lamp	041-041
Solar Sensor Light	042-043
(DIY) Combination Touch Lamp	44-044
(DIY) LED Connected Lamp	45-045


LED Digital Bed-lighting Sensor Strip



CL-CDA







CL-CDD



CL-CDG

OR

Model:	CL-CDA-1	CL-CDA-2	CL-CDD-1	CL-CDD-2	CL-CDG
Voltage:	DC12V	DC12V	DC12V	DC12V	DC 5V
Power(W/m):	3	6	3	6	2.4
Body Material:	PC	PC	PC	PC	PC
Led Type:	2835	2835	2835	2835	2835
Led Qty(LED/m):	30	30	30	30	30
Luminous Flux(lm):	200 ± 10%	400 ± 10%	200 ± 10%	400 ± 10%	200 ± 10%
CRI(Ra):	>80	>80	>80	>80	>80
CCT(K):	3000/4000/6000	3000/4000/6000	3000/4000/6000	3000/4000/6000	3000/4000/6000
Strips length(m):	1.2m *1	1.2m *2	1.2m *1	1.2m *2	1.2m *1
Sensor Mode:	PIR sensor	PIR sensor	PIR sensor	PIR sensor	PIR sensor
Sensor Distance(m):	2-5	2-5	2-5	2-5	2-5
Delay Time:	30s-6Min	30s-6Min	30s/130s/380s	30s/130s/380s	15s/2Min/5Min/10Min

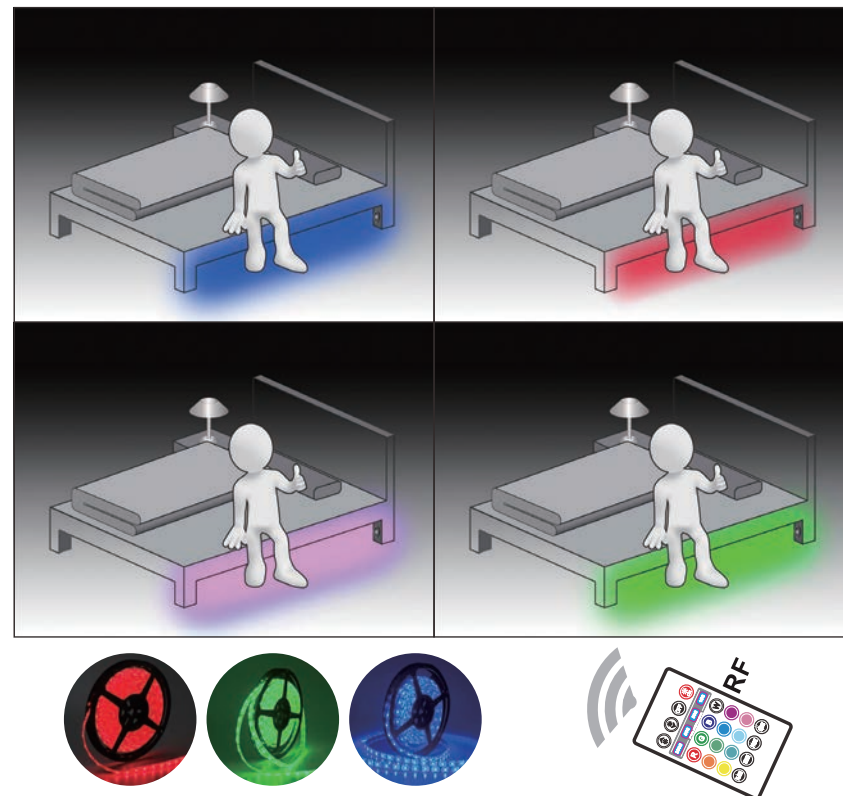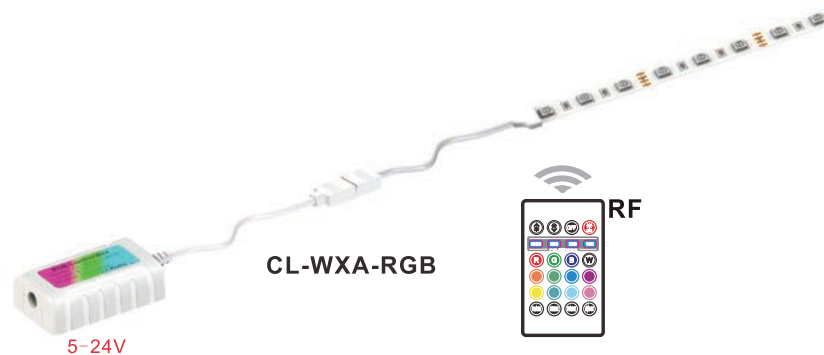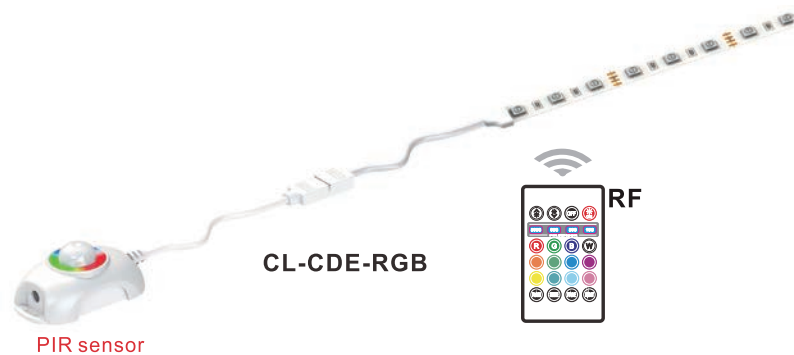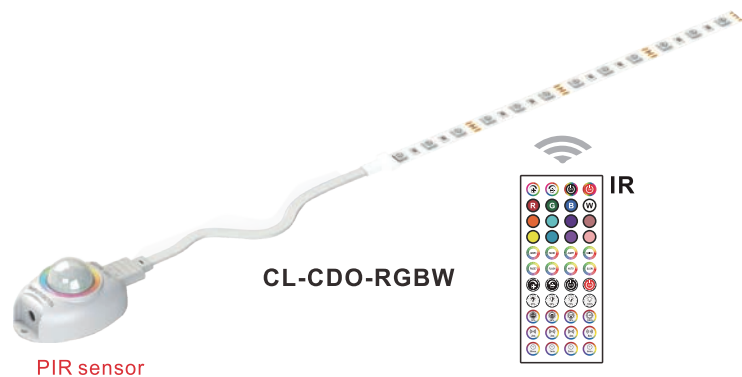

Model:	CL-CDO-RGBW	CL-CDE-RGB	CL-WXA-RGB
Voltage:	DC12V	DC12V	DC12V
Power(W/m):	6/12	6/12	6/12
Body Material:	PC	PC	PC
Led Type:	5050+2835	5050	5050
Led Qty(LED/m):	30/60	30/60	30/60
Led Color:	RGB	RGB	RGB
Strips length(m):	1.5/2/3/5	1.5/3/5	1.5/3/5
Sensor Mode:	PIR sensor+IR	PIR sensor+RF	RF
Product Size(mm):		64*36.5*26.5	48*29*14.5

LED Motion Sensor Strip



- Human body and light sensor switch
- Sensor is fixed by using magnet, easy to use
- Lithium battery for power supply
- Apply use android phone charger



Model:	CL-CDB-1	CL-CDK
Power Supply:	3.7V 1000mAh	3.7V 1500mAh
Power(W):	2.4	2.4
Body Material:	PC	PC
Led Type:	2835	2835
Led Qty(LED/m):	30	30
Luminous Flux(lm):	180 ± 10%	180 ± 10%
CRI(Ra):	>80	>80
CCT(K):	3000/4000/6000	3000/4000/6000
Sensor Distance(m):	2-5	2-5
Strips length(m):	1	1
Sensor Mode:	PIR sensor+Switch	PIR sensor+Switch
Delay Time:	30s	30s
Charging Time(h):	2.5~3.5	4~5
Working Time(h):	≥2.5	≥4



CL-CDB-RGB



CL-CDB-RGBW




CL-CDB-W



Model:	CL-CDB-RGB	CL-CDB-RGBW	CL-CDB-W
Power Supply:	3.7V 1000mAh	3.7V 1000mAh	3.7V 1000mAh
Power(W):	2.4	2.4	2.4
Body Material:	PC	PC	PC
Led Type:	5050	5050	5050 or 2835
Led Qty(LED/m):	30	60	30
Work Illumination:	2~5Lux	2~5Lux	2~5Lux
Luminous Flux(lm):	/	/	180±10%
CRI(Ra):	/	/	>80
CCT(K):	RGB	RGB+W	3000/4000/6000/R/G/B
Sensor Distance(m):	3~5	3~5	3~5
Strips length(m):	1	1	1
Sensor Mode:	PIR sensor+Switch	PIR sensor+Switch	PIR sensor+Switch
Delay Time:	15s/130s/380s	15s/130s/380s	15s/130s/380s
Charging Time(h):	2~3	2~3	2~3
Working Time(h):	2~2.5	2~2.5	2~2.5



CL-CDC
4*AAA BATTERY

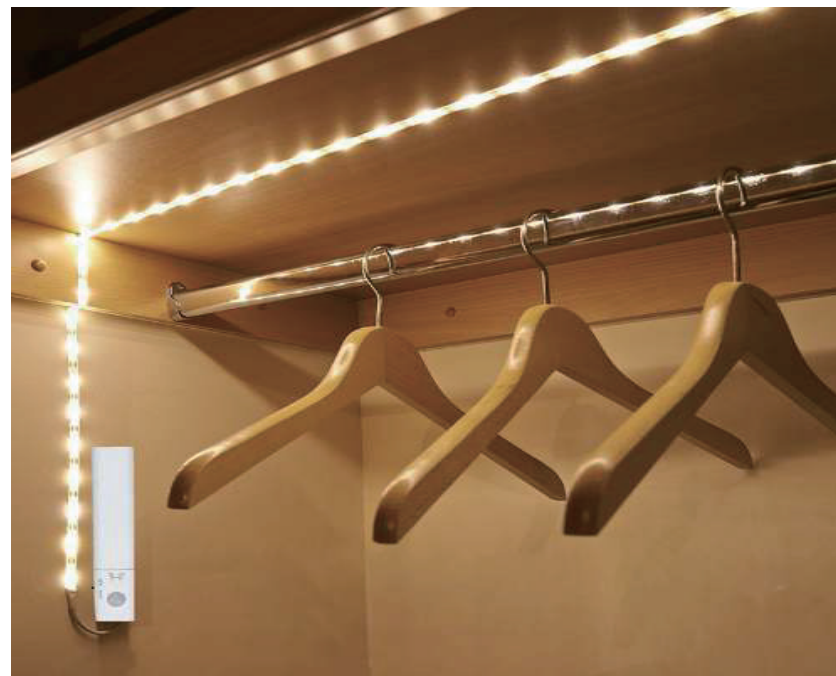


CL-CDH
2*AA BATTERY

Model:	CL-CDC-1	CL-CDH-1
Power Supply:	4*AAA	2*AA
Power(W):	2.4	1.5
Body Material:	ABS+PC	ABS+PC
Led Type:	2835	2835
Led Qty(LED/m):	30	30
Luminous Flux(lm):	180 ± 10%	150 ± 10%
CRI(Ra):	>80	>80
CCT(K):	3000/4000/6000	3000/4000/6000
Sensor Distance(m):	2-5	2-5
Strips length(m):	1	1
Sensor Mode:	PIR sensor+Switch	PIR sensor+Switch
Delay Time:	15s	15s
Working Time(h):	≥2.5	≥2.5


Auto Sensing LED Portable Light



Flashlight function



Can be used as
ambient light





with one led strip



- Human body and light sensor switch
- Dimmable from 8%-100%
- Lithium battery for power supply
- Apply use android phone charger

Model:	CL-CDF-S	CL-CDF-1
Power Supply:	3.7V 1500mAh	3.7V 1500mAh
Power(W):	0.8	2.4
Body Material:	ABS	ABS
Led Type:	2835	2835
Led Qty(pcs):	2	30
Luminous Flux(lm):	60±5%	180±10%
CRI(Ra):	>80	>80
CCT(K):	3000/4000/6000	3000/4000/6000
Sensor Distance(m):	2-5	2-5
Product Size(mm):	132.5*38.5*31	132.5*38.5*31
Sensor Mode:	PIR sensor+Switch	PIR sensor+Switch
Delay Time:	15s	15s
Charging Time(h):	4~5	4~5
Working Time(h):	≥8	≥2.5

LED Night Light — PIR Sensor

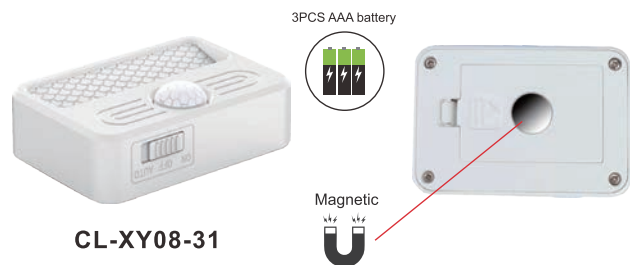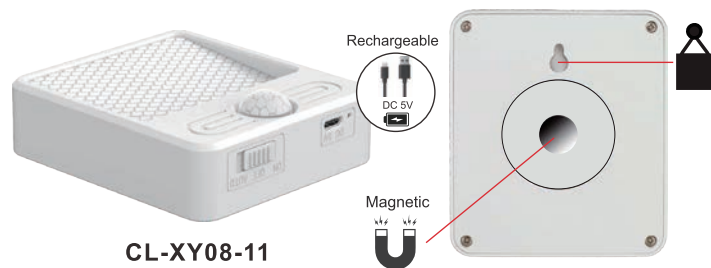

Model:	CL-XY08-11	CL-XY08-21	CL-XY08-31
Power Supply:	3.7V 1200mAh	3.7V 1000mAh	3*AAA
Power(W):	0.7	0.7	0.5
Body Material:	ABS	ABS	ABS
Led Type:	2835	2835	2835
Led Qty(pcs):	6	6	6
Luminous Flux(lm):	25 ± 5%	25 ± 5%	20 ± 5%
CRI(Ra):	>80	>80	>80
CCT(K):	3000/4000/6000	3000/4000/6000	3000/4000/6000
Sensor Distance(m):	2~5	2~5	2~5
Product Size(mm):	91*80*24.5	91*80*14.5	55*80*23
Sensor Mode:	PIR sensor	PIR sensor	PIR sensor
Delay Time:	30s	30s	30s
Switch Mode:	ON/OFF/AUTO	ON/OFF/AUTO	ON/OFF/AUTO
Charging Time(h):	3~4	2~3	/
Working Time(h):	≥10	≥8	≥8




CL-XYD-A
3 x AAA Battery

CL-XYD-L
Lithium Battery



CL-XYD-G
3 x AAA Battery

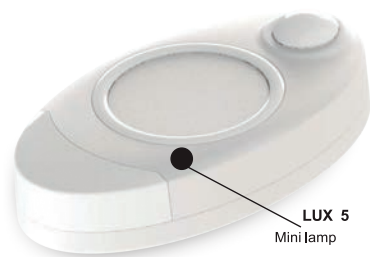


CL-BDA
3.0V(CR2450 button cell)




Model:	CL-XYD-A	CL-XYD-L	CL-XYD-G	CL-BDA
Power Supply:	3*AAA	3.7V 600mAh	3*AAA	3V(CR2450 Button Cell)
Power(W):	0.5	0.5	0.5	0.2
Body Material:	ABS+PC	ABS+PC	ABS+PC	ABS+PC
Led Type:	2835	2835	2835	2835
Led Qty(pcs):	6	6	6	1
Luminous Flux(lm):	30 ± 5%	30 ± 5%	30 ± 5%	25 ± 5%
CRI(Ra):	>80	>80	>80	>80
CCT(K):	3000/4000/6000	3000/4000/6000	3000/4000/6000	3000/4000/6000
Sensor Distance(m):	2-5	2-5	2-5	2-5
Product Size(mm):	Φ 80*26.5	Φ 80*23	Φ 72*22	54*31*14
Sensor Mode:	PIR sensor	PIR sensor	PIR sensor	PIR sensor
Delay Time:	30s	30s	30s	15s
Working Time(h):	≥8	≥6	≥8	≥8




CL-XYD-C




CL-XYD-D



CL-XYD-E




CL-XYD-F

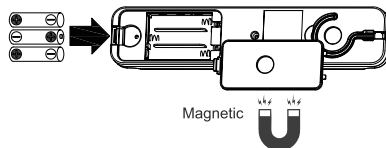


Installation on: storage room, cabinet, corridor, entrance.



Model:	CL-XYD-C	CL-XYD-D	CL-XYD-E	CL-XYD-F
Power Supply:	3*AAA	3*AAA	3*AAA	3*AAA
Power(W):	0.5	0.5	0.5	0.5
Body Material:	ABS+PC	ABS+PC	ABS+PC	ABS+PC
Led Type:	2835	2835	2835	2835
Led Qty(pcs):	8	7	6	8
Luminous Flux(lm):	25 ± 5%	40 ± 5%	35 ± 5%	35 ± 5%
CRI(Ra):	>80	>80	>80	>80
CCT(K):	3000/4000/6000	3000/4000/6000	3000/4000/6000	3000/4000/6000
Sensor Distance(m):	2-5	2-5	2-5	2-5
Product Size(mm):	88*88*36	118*65*31	140*58*33	200*42*36.5
Sensor Mode:	PIR sensor	PIR sensor	PIR sensor	PIR sensor
Delay Time:	30s	30s	30s	30s
Working Time(h):	≥8	≥8	≥8	≥8

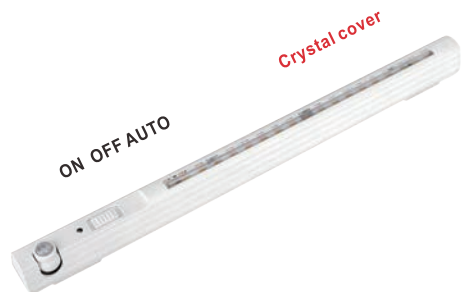

CL-CG21
3 x AAA Battery

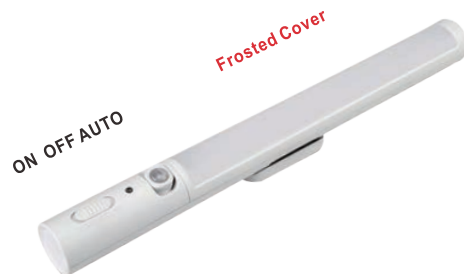

CL-CG22
3 x AA Battery




CL-XY09
4 x AA Battery



CL-XY10-10
Lithium Battery





CL-XY10-20
4 x AA Battery

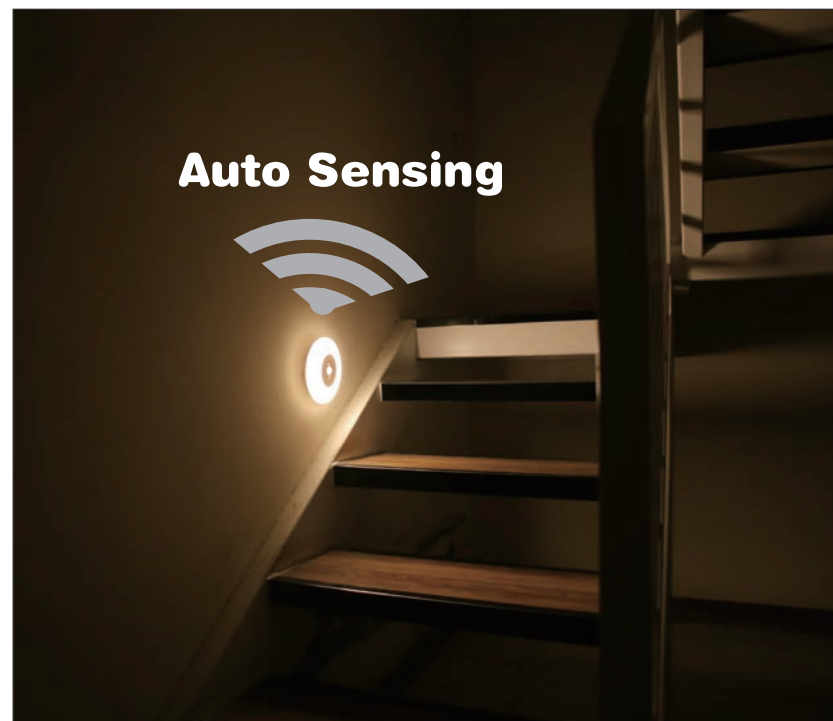

Model:	CL-CG21	CL-CG22	CL-XY09	CL-XY10-10	CL-XY10-20
Power Supply:	3*AAA	3*AA	4*AA	3.7V 2000mAh	4*AA
Power(W):	0.4	0.7	1	1	1
Body Material:	ABS+PC	ABS+PC	ABS+PC	ABS+PC	ABS+PC
Led Type:	2835	2835	2835	2835	2835
Led Qty(pcs):	19	21	48	48	48
Luminous Flux(lm):	40±5%	70±5%	110±5%	90±5%	90±5%
CRI(Ra):	>80	>80	>80	>80	>80
CCT(K):	3000/4000/6000	3000/4000/6000	3000/4000/6000	3000/4000/6000	3000/4000/6000
Sensor Distance(m):	2-5	2-5	2-5	2-5	2-5
Product Size(mm):	300*22*21.5	Φ26*260	150*150*34.5	Φ150*41	Φ150*42
Sensor Mode:	PIR sensor	PIR sensor	PIR sensor	PIR sensor	PIR sensor
Delay Time:	30s	30s	30s	30s	30s
Working Time(h):	≥8	≥8	≥8	≥8	≥8


NEW

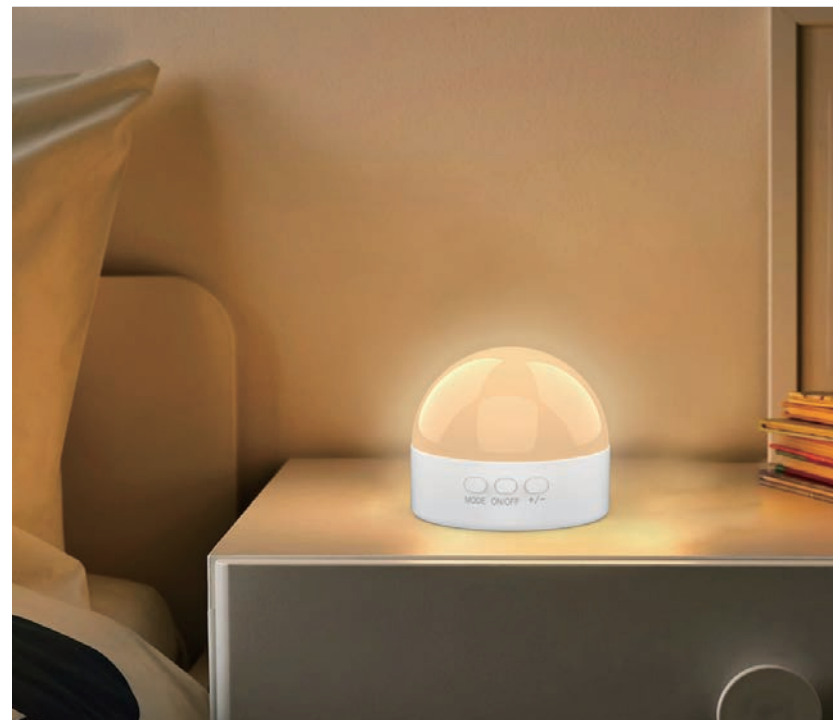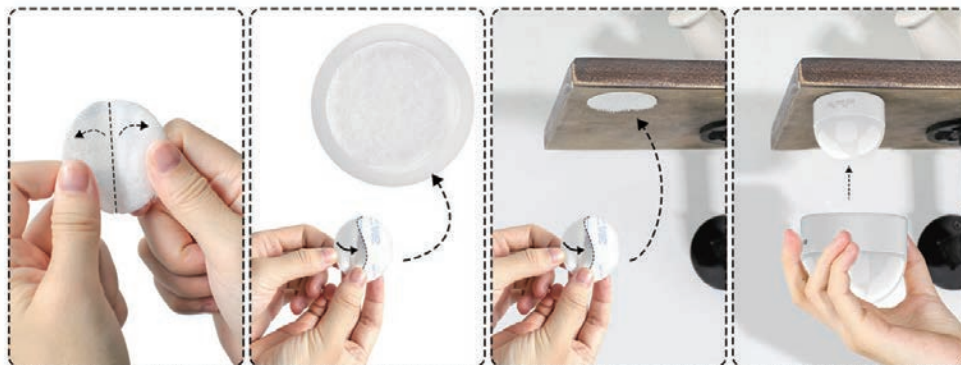

Model:	CL-XY11
Power Supply:	3.7V 1200mAh
Power(W):	0.5
Body Material:	ABS+PC
Led Type:	2835+5050RGB
Led Qty(pcs):	5050RGB(3PCS)+2835(12PCS)
Luminous Flux(lm):	40Lm±10%
CRI(Ra):	>80
CCT(K):	3000K/4000K/6000K
Product Size(mm):	Ø78.2*67mm

LED Cabinet Light

MAGNETIC INDUCTION

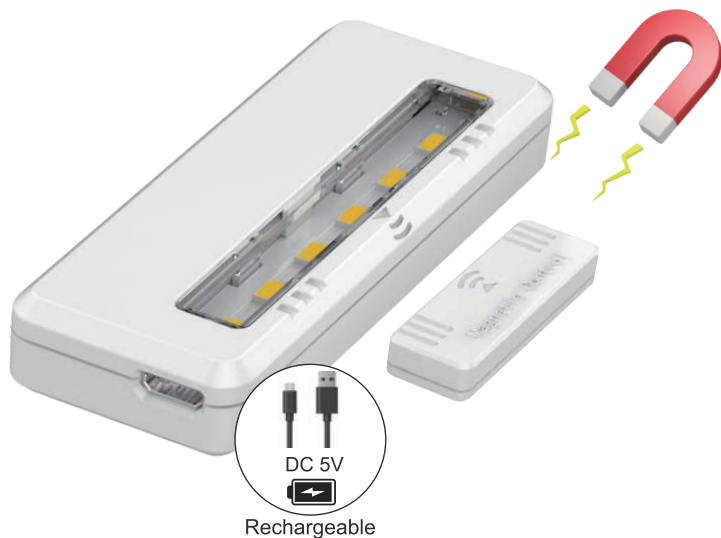

CL-CGM-A



CL-CGM-L



CL-CGM-K




Open door, light on; Close door, light off.




Little sensor lights, can be installed on the door, aisle, and other places!

Model:	CL-CGM-A	CL-CGM-L	CL-CGM-K
Power Supply:	2*AAA	3.7V 330mAh	3.7V 330mAh
Power(W):	0.5	0.5	0.8
Body Material:	ABS+PC	ABS+PC	ABS+PC
Led Type:	2835	2835	2835
Led Qty(pcs):	6	6	12
Luminous Flux(lm):	35±5%	35±5%	50±5%
CRI(Ra):	>80	>80	>80
CCT(K):	3000/4000/6000	3000/4000/6000	3000/4000/6000
Sensor Distance(cm):	1-2	1-2	1-2
Product Size(mm):	65*43*15	65*29*12	118*29*12
Sensor Mode:	Magnetic control	Magnetic control	Magnetic control
Charging Time(h):	/	1	1
Working Time(h):	≥6	≥3	≥2



CL-CG15-51

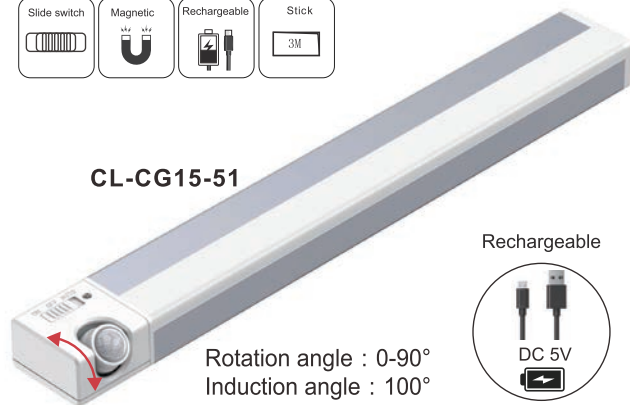

Rotation angle : 0-90°
Induction angle : 100°



Rechargeable



Lithium Battery

Rotation angle : 0-90°
Induction angle : 100°

CL-CGH-A

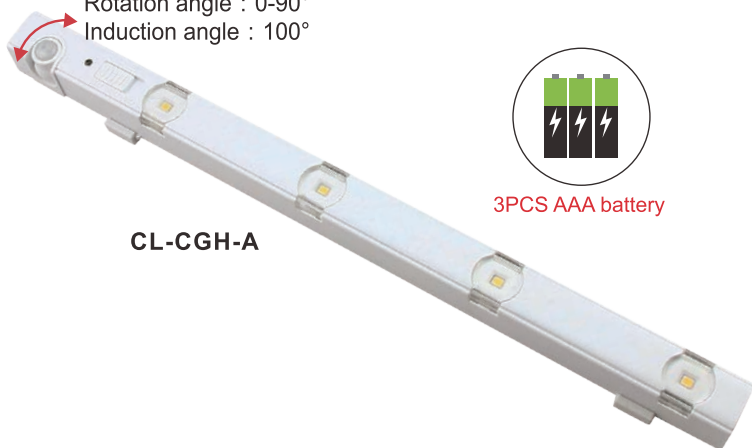

3PCS AAA battery




Model:	CL-CG15-51	CL-CGH-A
Power Supply:	3.7V 1800mAh	3*AAA
Power(W):	2.5	0.3
Body Material:	ABS+PC+Aluminum	ABS+PC
Led Type:	2835	2835
Led Qty(pcs):	24	4
Luminous Flux(lm):	200 ± 10%	30 ± 5%
CRI(Ra):	>80	>80
CCT(K):	3000/4000/6000	3000/4000/6000
Sensor Distance(m):	2-5	2-5
Product Size(mm):	300*37.5*22	290*19*22
Sensor Mode:	PIR sensor	PIR sensor
Delay Time:	30s	30s
Switch Mode:	ON/OFF/AUTO	ON/OFF/AUTO
Charging Time(h):	3~3.5	/
Working Time(h):	≥3	≥4.7



Model:	CL-CGG-A	CL-CGG-F	CL-CGL-A
Power Supply:	3*AA	3*AA	3*AAA
Power(W):	1.5	1.5	0.5
Body Material:	ABS	ABS	ABS
Led Type:	2835	2835	2835
Led Qty(pcs):	6	6	6
Luminous Flux(lm):	85±5%	85±5%	50±5%
CRI(Ra):	>80	>80	>80
CCT(K):	3000/4000/6000	3000/4000/6000	3000/4000/6000
Sensor Distance(m):	2-5	2-5	2-5
Product Size(mm):	280*44.5*22	280*44.5*22	180*30*24.5
Sensor Mode:	Switch button	PIR sensor	PIR sensor
Delay Time:	/	30s	30s
Switch Mode:	20%50%100%	/	/
Working Time(h):	≥7	≥7	≥2.5



CL-CG13-51
PIR Sensor

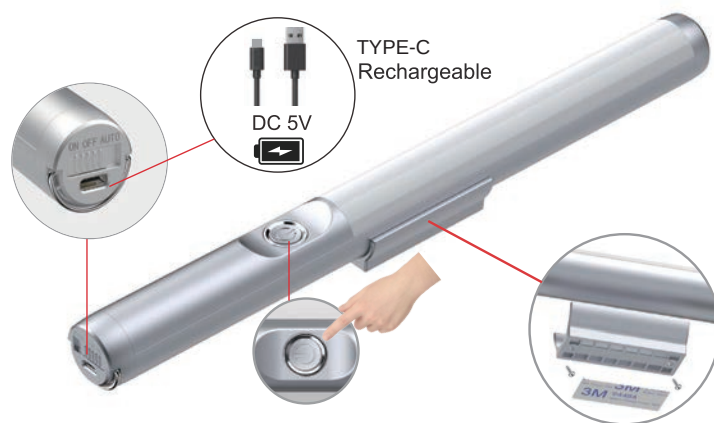


CL-CG13-11
Press Down





This product is widely used for cabinet, wardrobe, wine cabinet and other places.
Make your life more intelligent and enjoyable.

Model:	CL-CG13-51	CL-CG13-11
Power Supply:	3.7V 1800mAh	3.7V 1800mAh
Power(W):	2.5	2.5
Body Material:	Aluminum+ABS+PC	Aluminum+ABS+PC
Led Type:	2835	2835
Led Qty(pcs):	30	30
Luminous Flux(lm):	200 ± 10%	200 ± 10%
CRI(Ra):	>80	>80
CCT(K):	3000/4000/6000	3000/4000/6000
Sensor Distance(m):	2-5	/
Product Size(mm):	Φ 28*310	Φ 28*310
Sensor Mode:	PIR sensor	Button Switch
Delay Time:	30s	/
Switch Mode:	ON/OFF/AUTO	25%/50%/100%
Charging Time(h):	3~3.5	3~3.5
Working Time(h):	≥3	≥3

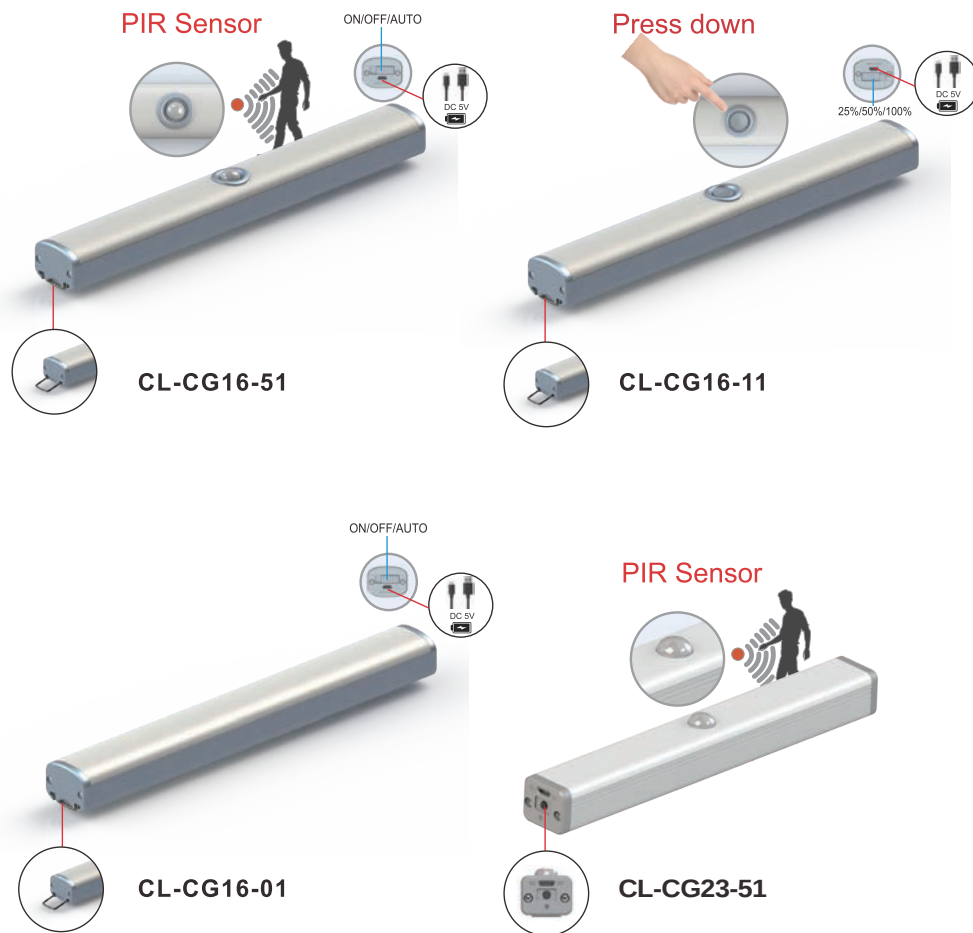

This product is widely used for cabinet, wardrobe, wine cabinet and other places. Make your life more intelligent and enjoyable.


Model:	CL-CG16-51	CL-CG16-11	CL-CG16-01	CL-CG23-51
Power Supply:	3.7V 3000mAh	3.7V 3000mAh	3.7V 3000mAh	3.7V 1000mAh
Power(W):	4	4	4	0.8
Body Material:	ABS+PC+Aluminum	ABS+PC+Aluminum	ABS+PC+Aluminum	AL+PL
Led Type:	2835	2835	2835	2835
Led Qty(pcs):	46	46	46	16
Luminous Flux(lm):	280 ± 10%	280 ± 10%	280 ± 10%	80 ± 5%
CRI(Ra):	>80	>80	>80	>80
CCT(K):	3000/4000/6000	3000/4000/6000	3000/4000/6000	3000/4000/6000
Sensor Distance(m):	2-5	2-5	2-5	2-5
Product Size(mm):	280*36*28	280*36*28	280*36*28	200*26*22
Sensor Mode:	PIR sensor	Button Switch	Button Switch	PIR sensor
Delay Time:	30s	/	/	/
Switch Mode:	ON/OFF/AUTO	20% 50% 100%	OFF 50% 100%	AUTO/OFF/ON
Charging Time(h):	5~8	5~8	5~8	2~3
Working Time(h):	≥3.5	≥3.5	≥3.5	≥4.5

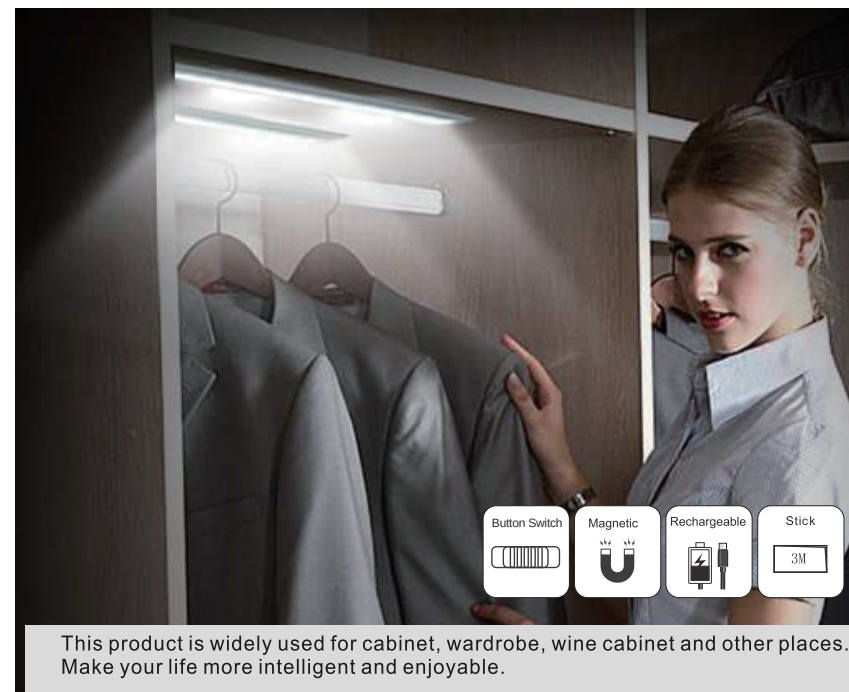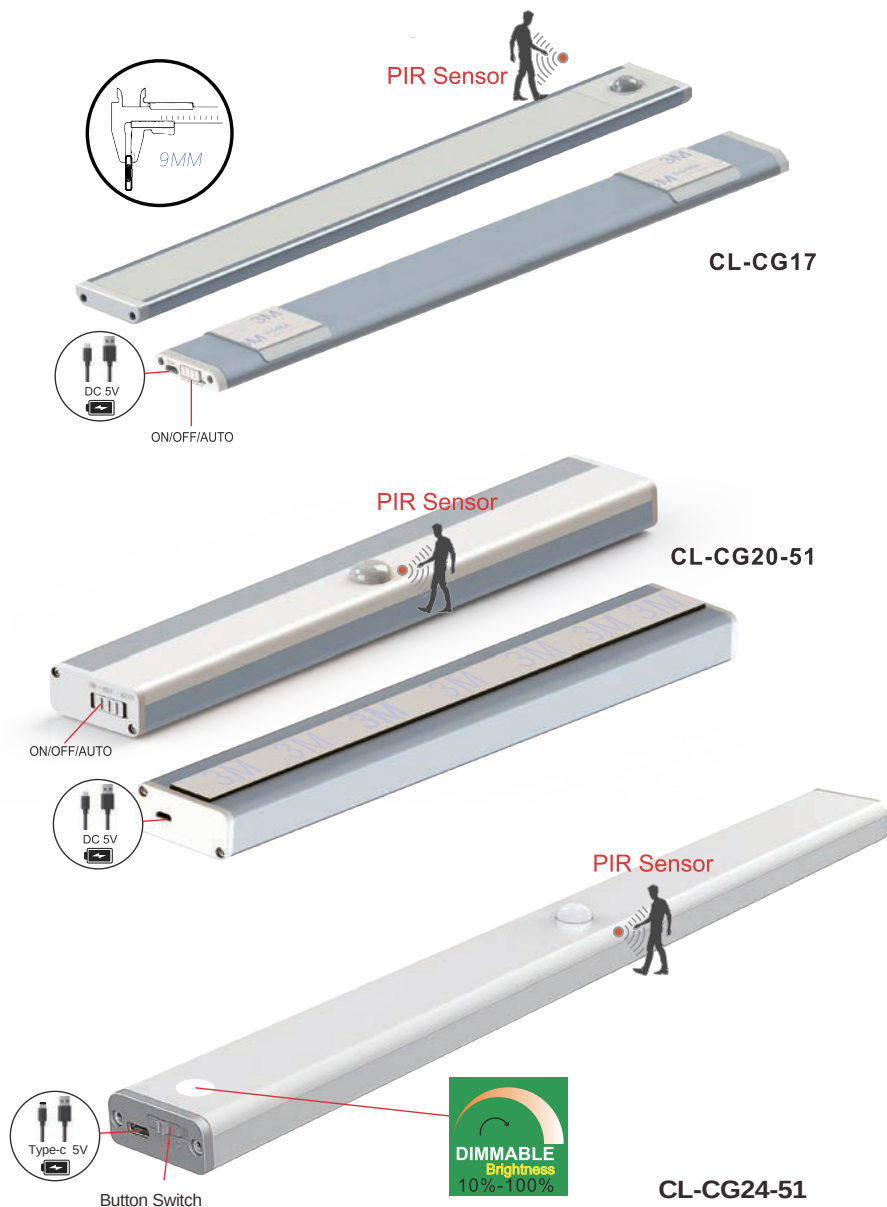

Model:	CL-CG17-51	CL-CG17-52	CL-CG20-51	CL-CG24-51
Power Supply:	3.7V 1100mAh	3.7V 2200mAh	3.7V 1800mAh	3.7V 2000mAh
Power(W):	1.5	2.5	2.5	2.5
Body Material:	Aluminum+PC+ABS	Aluminum+PC+ABS	ABS+PC	Aluminum+PC+ABS
Led Type:	4014	4014	2835	2835
Led Qty(pcs):	48	86	60	110
Luminous Flux(lm):	85±5%	150±10%	200±10%	260±10%
CRI(Ra):	>80	>80	>80	>80
CCT(K):	3000/4000/6000	3000/4000/6000	3000/4000/6000	3000/4000/6000
Sensor Distance(m):	2~5	2~5	2~5	2~5
Product Size(mm):	300*40*9	500*40*9	300*48*22	405*40*17
Sensor Mode:	PIR sensor	PIR sensor	PIR sensor	PIR sensor
Delay Time:	30s	30s	30s	30s
Switch Mode:	ON/OFF/AUTO	ON/OFF/AUTO	ON/OFF/AUTO	ON/OFF/AUTO
Charging Time(h):	1~2	3~4	2~3	2~3
Working Time(h):	≥2.5	≥2.5	≥2.5	≥2.5



CL-CG27

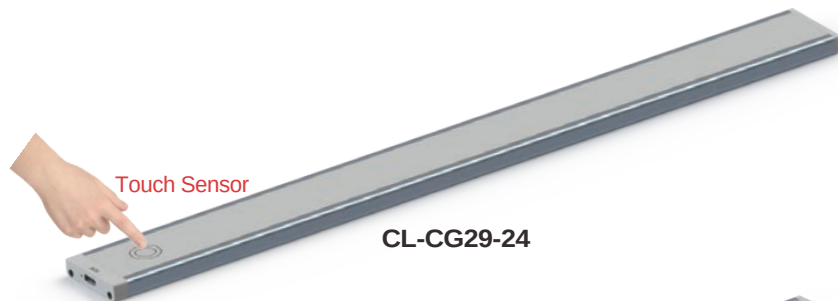

CL-CG29-24



CL-CG29-54




Model:	CL-CG27	CL-CG29-24(40cm)	CL-CG29-54(40cm)
Power Supply:	3.7V 2000mAh	Polymer/3.7V/2200mA	Polymer/3.7V/2200mA
Power(W):	2.2	2.5	2.5
Body Material:	ABS+PC+6063AL	AL+ABS+PC	AL+ABS+PC
Led Type:	2835	4014	4014
Led Qty(pcs):	78	150	138
Luminous Flux(lm):	125Lm±10%	100Lm±10%	100Lm±10%
CRI(Ra):	>80	>80	>80
CCT(K):	3000K-4000K-6000K	3000K-4000K-5000K	3000K-4000K-5000K
Sensor Distance(m):	2~5	/	2~5
Product Size(mm):	400*41*16.5	400*41.2*9.2	400*41.2*9.2
Sensor Mode:	PIR sensor	Touch sensor	PIR sensor
Delay Time:	30s	/	15s/30s/90s
Switch Mode:	ON/OFF/CCT	ON/OFF/CCT	AUTO/OFF/ON
Charging Time(h):	1~2	3~4	3~4
Working Time(h):	≥2.5	≥3	≥3



CL-CG28-21



CL-CG28-22

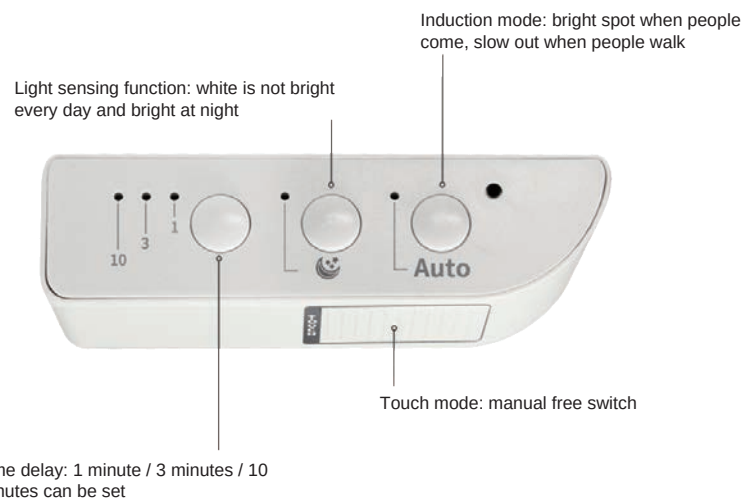

Model:	CL-CG28-21	CL-CG28-22
Voltage:	220V	220V
Power(W):	9	11
Body Material:	PC+AL	PC+AL
Led Type:	2835	2835
Led Qty(pcs):	96	96
Brightness:	560 lux(max)	640 lux(max)
CRI(Ra):	>80	>80
CCT(K):	3000K-4000K-6000K	3000K-4000K-6000K
Sensing Distance:	3~5m	/
Product Size(mm):	616*61.5*16	616*61.5*16
Sensor Mode:	PIR Sensor /Touch Sensor	/



PIR Sensor



CL-K17

PIR Sensor



CL-K18



Motion Sensor



Brightness



Long life




Charging circuit



Magnetic



Model:	CL-K17-52D	CL-K17-53D	CL-K17-54D	CL-K18-53
Voltage:	DC5V	DC5V	DC5V	DC5V
Power(W):	1.4	2	2.4	1.4
Body Material:	PC+AL+ABS	PC+AL+ABS	PC+AL+ABS	PC+AL+ABS
Led Type:	4014	4014	4014	4014
Led Qty(pcs):	42	51	42	48
Luminous flux(lm):	75±5% (max)	110±10% (max)	130±10% (max)	132±10% (max)
CRI(Ra):	>80	>80	>80	>80
CCT(K):	3000K-4500K-6000K	3000K-4500K-6000K	3000K-4500K-6000K	3000K/4000K/6000K
Sensing Distance:	3~5m	3~5m	3~5m	3~5m
Product Size(mm):	234*41.2*9.2	304*41.2*9.2	404*41.2*9.2	300*40*9
Sensor Mode:	PIR Sensor	PIR Sensor	PIR Sensor	PIR Sensor

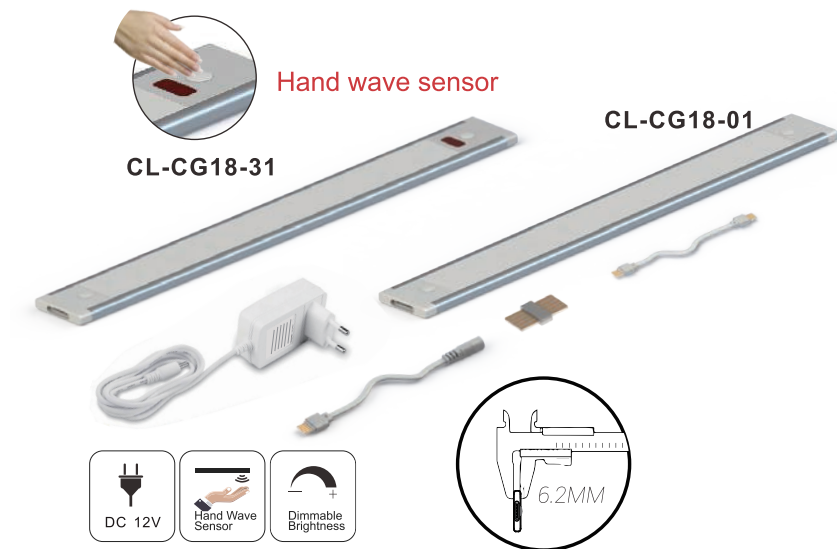

This product is widely used for cabinet, wardrobe, wine cabinet and other places. Make your life more intelligent and enjoyable.

Model:	CL-CG18-31	CL-CG18-01	CL-CG19-31
Voltage:	DC12V	DC12V	AC220V /50Hz
Power(W):	3	3	9
Body Material:	Aluminum+PC	Aluminum+PC	ABS+PC
Led Type:	4014	4014	2835
Led Qty(pcs):	54	54	80
Luminous Flux(lm):	135±10%	140±10%	560±10%
CRI(Ra):	>80	>80	>80
CCT(K):	3000/4000/6000	3000/4000/6000	3000/4000/6000
Dimming Range:	8% ~ 100%	8% ~ 100%	8% ~ 100%
Product Size(mm):	300*35*6.2	300*35*6.2	600*35*16





CL-CGK-A

Dimming range: 20%, 50%, 100%
CCT changeable 3000K to 6000K





CL-CGK-B

Dimming range from 8% to 100%

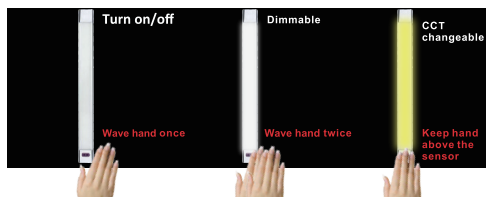

This product is widely used for cabinet, wardrobe, wine cabinet and other places.
Make your life more intelligent and enjoyable.


Model:	CL-CGK-A-5W-300	CL-CGK-A-8W-500	CL-CGK-B-5W-300	CL-CGK-B-8W-500
Voltage:	DC12V	DC12V	DC12V	DC12V
Power(W):	5	8	5	8
Body Material:	Aluminum+PC	Aluminum+PC	Aluminum+PC	Aluminum+PC
Led Type:	2835	2835	2835	2835
Led Qty(pcs):	54	96	30	54
Luminous Flux(lm):	350±10%	560±10%	350±10%	560±10%
CRI(Ra):	>80	>80	>80	>80
CCT(K):	3000-6000	3000-6000	3000/4000/6000	3000/4000/6000
Dimming Range:	20% 50% 100%	20% 50% 100%	8% ~ 100%	8% ~ 100%
Product Size(mm):	300*30*11.5	500*30*11.5	300*30*11.5	500*30*11.5

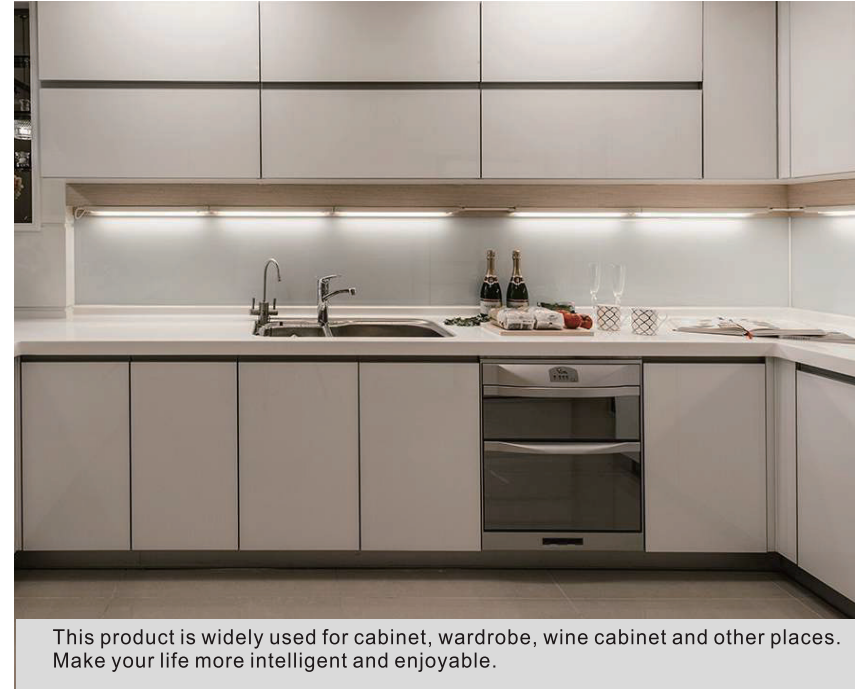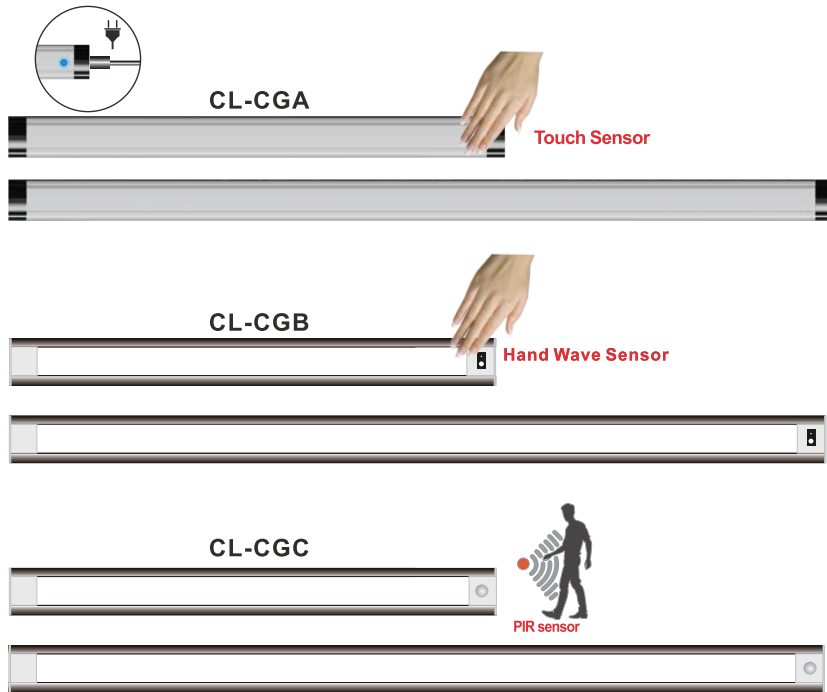

Model:	CL-CGA-3W-300	CL-CGA-5W-500	CL-CGB-5W-300	CL-CGB-9W-600	CL-CGC-5W-300	CL-CGC-9W-500
Voltage:	DC12V	DC12V	DC12V	DC12V	DC12V	DC12V
Power(W):	3	5	5	9	5	9
Body Material:	Aluminum+PC	Aluminum+PC	Aluminum+PC	Aluminum+PC	Aluminum+PC	Aluminum+PC
Led Type:	2835	2835	2835	2835	2835	2835
Led Qty(pcs):	30	54	30	66	30	66
Luminous Flux(lm):	220±10%	380±10%	380±10%	680±10%	380±10%	680±10%
CRI(Ra):	>80	>80	>80	>80	>80	>80
CCT(K):	3000/4000/6000	3000/4000/6000	3000/4000/6000	3000/4000/6000	3000/4000/6000	3000/4000/6000
Dimming Range:	8% ~ 100%	8% ~ 100%	8% ~ 100%	8% ~ 100%	8% ~ 100%	8% ~ 100%
Product Size(mm):	300*25*9	500*25*9	300*40*10.5	600*40*10.5	300*40*10.5	600*40*10.5
Sensor Mode:	Touch sensor	Touch sensor	Hand wave sensor	Hand wave sensor	PIR sensor	PIR sensor



CL-CGE

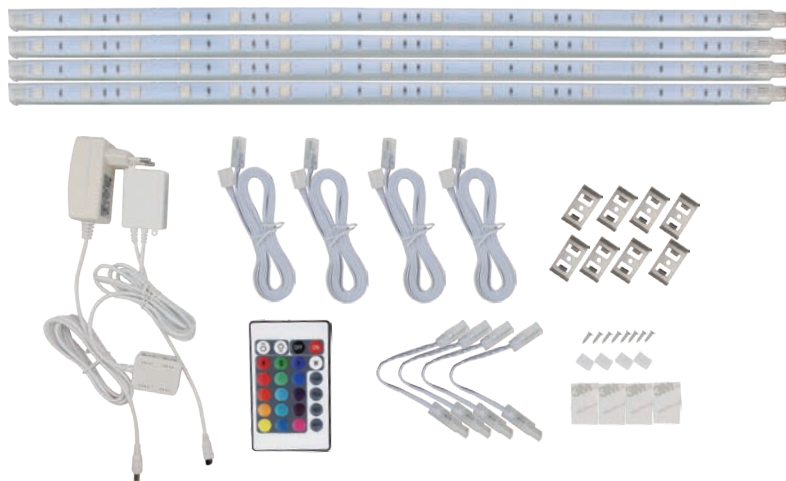

CL-CGE-RGB



Model:	CL-CGE	CL-CGE-RGB
Voltage:	DC12V	DC12V
Power(W):	1.5	3
Body Material:	PC	PC
Led Type:	2835	5050
Led Qty(pcs):	9	15
Luminous Flux(lm):	120±10%	/
CRI(Ra):	>80	/
Led Color:	3000/4000/6000	RGB
Dimming Range:	/	/
Product Size(mm):	400*10*7	400*10*7



Model:	CL-CGD	CL-CG25
Voltage:	DC24V	DC12V
Power(W):	6	8
Body Material:	Aluminum+PC	ABS
Led Type:	2835	5050
Led Qty(pcs):	72	36(4*9)
Luminous Flux(lm):	500±10%	110±10%(W)
CRI(Ra):	>80	>80
CCT(K):	3000/4000/6000	RGB
Product Size(mm):	600*25.5*8	ø57*6

LED Touch Sensor Strip



Touch switch

CL-CMA




Hand wave switch

CL-SSA



Model:	CL-CMA	CL-SSA
Voltage:	DC12V	DC12V
Power(W/m):	4.8	4.8
Led Type:	2835	2835
Led Qty(LED/m):	60	60
Luminous Flux(lm):	550 ± 10%(1.5m)	550 ± 10%(1.5m)
CRI(Ra):	>80	>80
CCT(K):	3000/4000/6000	3000/4000/6000
Strips length(m):	1 / 1.5 / 3	1 / 1.5 / 3
Sensor Mode:	Touch sensor	Hand wave switch

LED Ambient Light

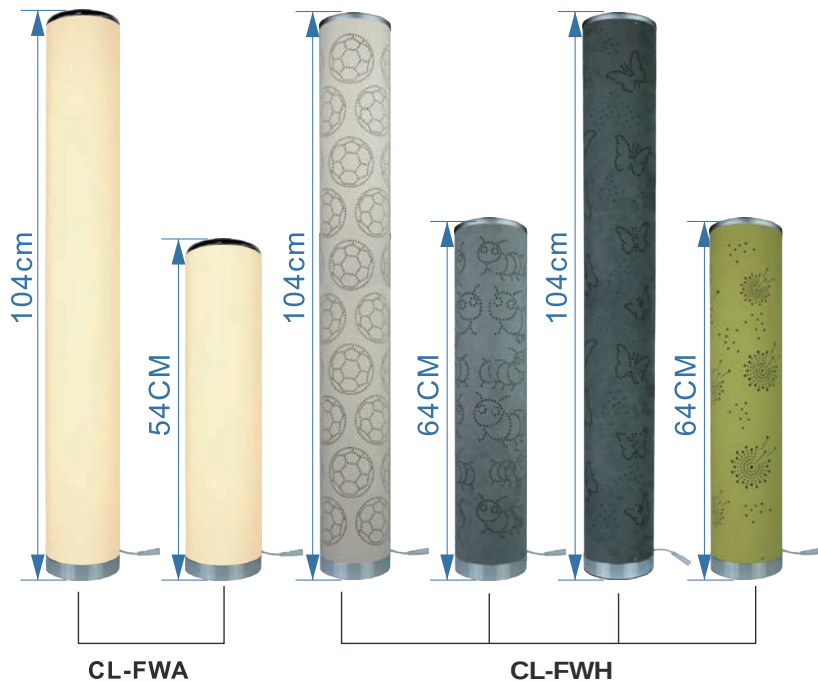

Model:	CL-FWA-104	CL-FWA-54	CL-FWH-104	CL-FWH-64
Voltage:	DC12V	DC12V	DC12V	DC12V
Power(W):	10	5	10	5
Body Material:	ABS	ABS	ABS	ABS
Led Type:	5050+2835	5050+2835	2835	2835
Led Qty(pcs):	180	90	60	36
CRI(Ra):	>80	>80	>80	>80
Led Color:	RGB+W	RGB+W	3000K/4000K/6000K	3000K/4000K/6000K
Product Size(mm):	Φ 129*1040	Φ 129*540	Φ 129*1040	Φ 129*640

NEW LED Ambient Light → DIY



CL-FW01

CL-FW01-E

Print what you like




Model:	CL-FW01	CL-FW01-E
Voltage:	DC12V	DC5V
Power(W):	10	12
Body Material:	PP+ABS	PP+ABS
Led Type:	5050RGB+2835CCT	2835
Led Qty(pcs):	120+60	40(3000K)+40(5000K)
CRI(Ra):	>80	>80
Led Color:	RGB+W	3000K+5000K
Product Size(mm):	ø128*1040	ø128*1040



LED Ambient Light →DIY





CL-FW02

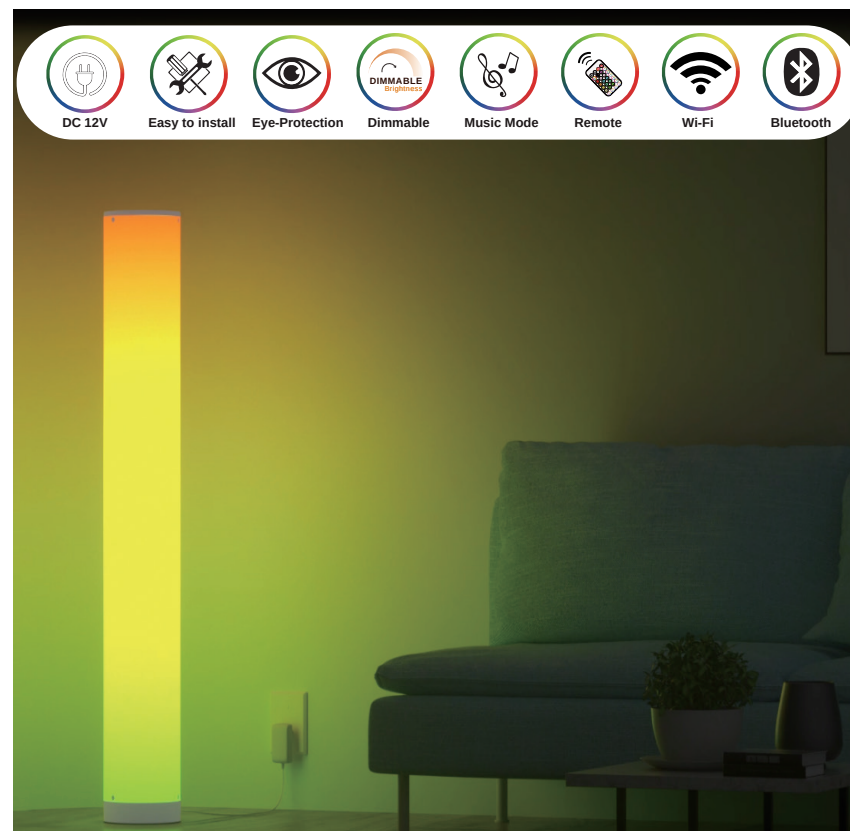


Model:	CL-FW02-A	CL-FW02-B	CL-FW02-C	CL-FW02-D
Voltage:	DC12V	DC12V	DC5V 2A	DC12V
Power(W):	10	10	10	10x2
Body Material:	ABS	ABS	PP+ABS	ABS
Led Type:	5050RGB+2835CCT	5050RGB+2835CCT	5050RGB+2835CCT	5050RGB+2835CCT
Led Qty(pcs):	60+60	60+60	60+60	(60+60)+(60+60)
CRI(Ra):	>80	>80	>80	>80
Led Color:	RGB+W	RGB+W	RGB+W	RGB+W
Product Size(mm):	ø128*880	ø128*880	ø128*880	ø128*880

LED Floor Light → DIY

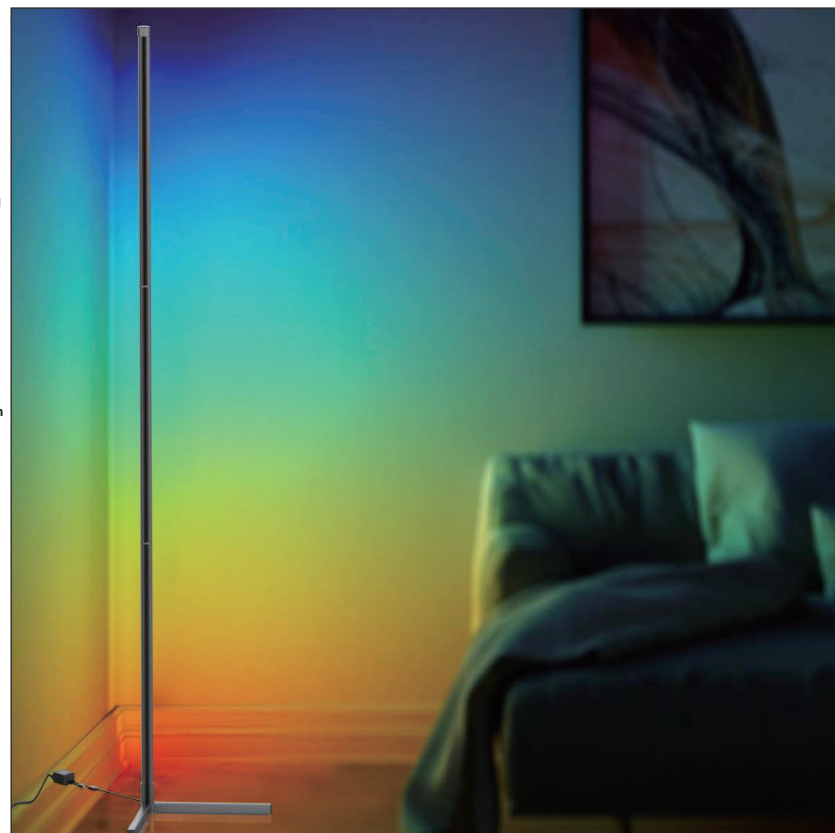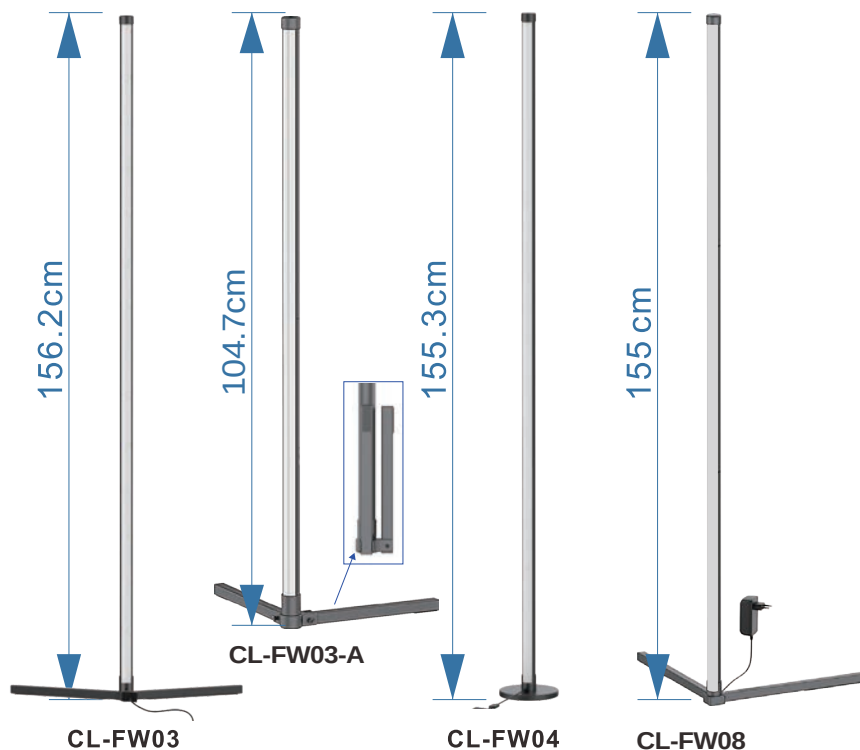

Model:	CL-FW03	CL-FW03-A	CL-FW04	CL-FW08
Voltage:	DC12V	DC5V/2A	DC12V	DC12V/1.5A
Power(W):	18	8	18	18
Body Material:	Al alloy+ABS+Silicone	Al alloy+ABS+Silicone	Al alloy+ABS+Silicone	Al alloy+ABS+Silicone
Led Type:	5050+2835	5050	5050+2835	5050+2835
Led Qty(pcs):	90(5050)+90(2835)	60	90(5050)+90(2835)	90(5050)+90(2835)
CRI(Ra):	>80	>80	>80	>80
Led Color:	RGB+W	RGB	RGB+W	RGB+W
Product Size(mm):	Φ 30*1562	Φ30*1047	Φ 30*1553	Φ30*1550

LED Floor Light → DIY

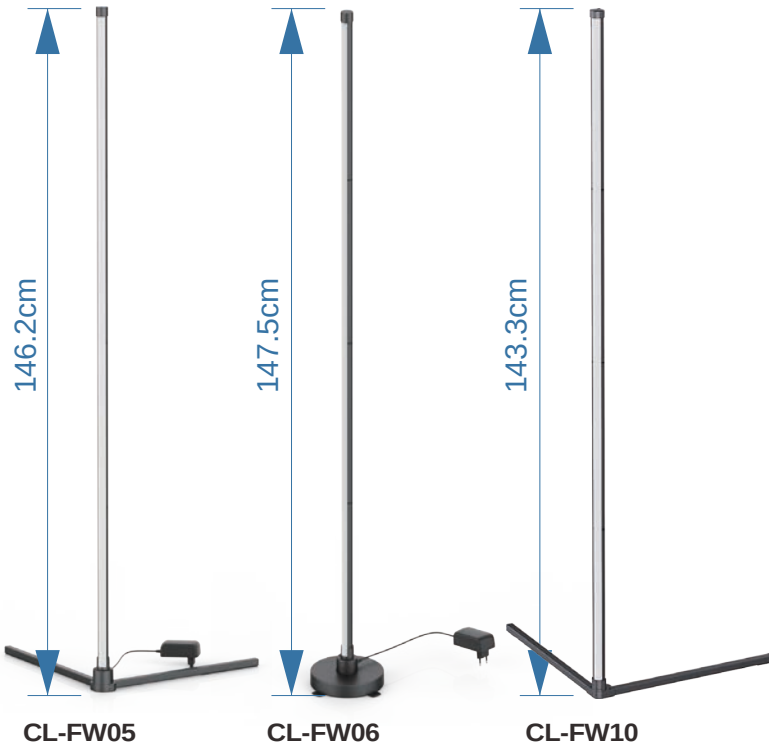

Model:	CL-FW05	CL-FW06	CL-FW10
Voltage:	DC12V/1.5A	DC12V/1.5A	DC 5V/2A
Power(W):	17	17	10
Body Material:	aluminum alloy+ABS+Silicone	aluminum alloy+ABS+Silicone	aluminum alloy+ABS+Silicone
Led Type:	5050+2835	5050+2835	5050
Led Qty(pcs):	84(5050)+84(2835)	84(5050)+84(2835)	84
CRI(Ra):	>80	>80	>80
Led Color:	RGB+W	RGB+W	RGB
Product Size(mm):	ø23.5*1462	ø23.5*1475	27*1433

LED Floor Light → DIY



DC 12V



Easy to install



Eye-Protection



Dimmable



Music Mode



Remote



Wi-Fi



Bluetooth



CL-FW09




Model:	CL-FW09
Voltage:	DC12V/1.5A
Power(W):	20
Body Material:	aluminum alloy+ABS+Silicone
Led Type:	5050+2835
Led Qty(pcs):	120(5050)+120(2835)
CRI(Ra):	>80
Led Color:	RGB+W
Product Size(mm):	ø130*1045

NEW LED Floor Light → DIY




CL-FW14

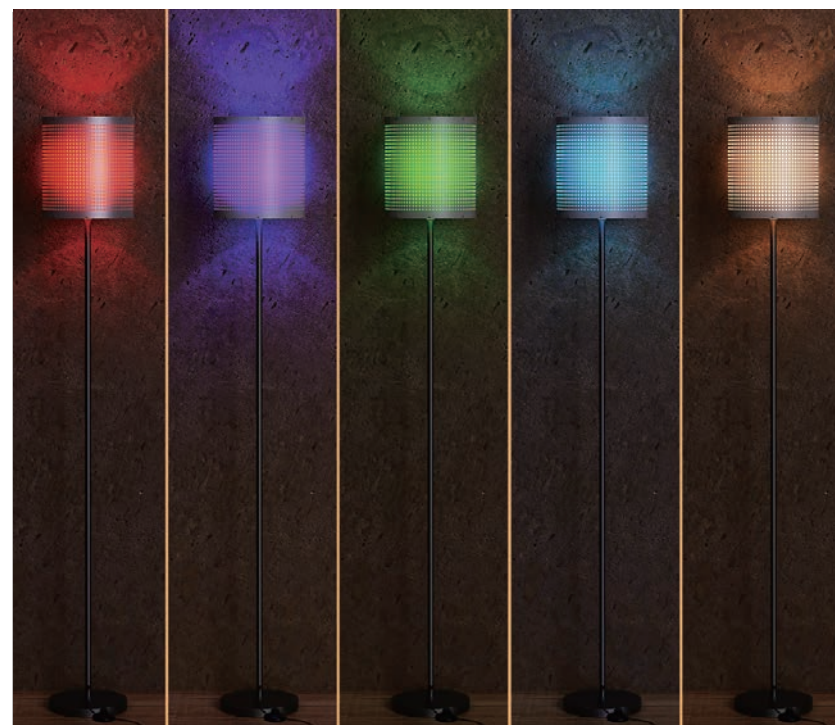

Model:	CL-FW14
Voltage:	AC 110-130V / AC 220-240V
Power(W):	9
Body Material:	High quality iron+PP
Led Type:	5050+2835
CRI(Ra):	>80
Led Color:	RGB+CCT
Product Size(mm):	Ø275*1680

NEW LED Floor Light → DIY

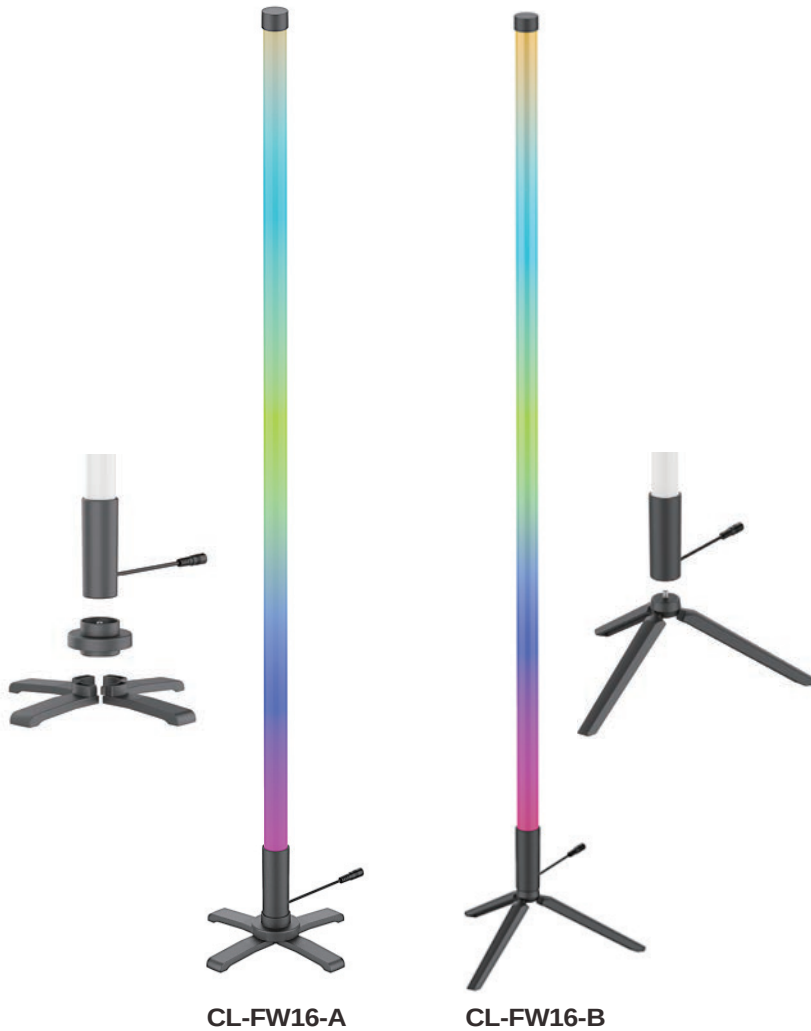


Model:	CL-FW16-A	CL-FW16-B
Voltage:	5V/2A	5V/2A
Power(W):	8	8
Body Material:	PC+ABS	PC+ABS
Led Type:	5050	5050
Led Qty(pcs):	60	60
CRI(Ra):	/	/
Led Color:	RGB	RGB
Product Size(mm):	Ø30*1132	Ø30*1185

NEW LED Floor Light → DIY

Style 1:
Powered By



Style 2:
RF with remort controller.



CL-FW18



Model:	CL-FW18
Voltage:	5V/2A
Power(W):	10
Body Material:	AL alloy+PC+ABS
Led Type:	5050
Led Qty(pcs):	45
CRI(Ra):	/
Led Color:	RGB
Product Size(mm):	1220

NEW

LED Ambient Light →DIY




Bluetooth



IR controller

Powered By


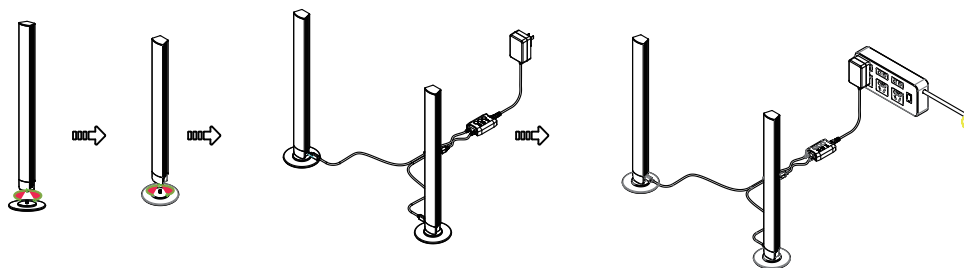


CL-FW15

Model:	CL-FW15
Voltage:	DC 5V/2A
Power(W):	10
Body Material:	ABS+PC
Led Type:	5050
Led Qty(pcs):	60
CRI(Ra):	>80
Led Color:	RGB
Product Size(mm):	34.3*25*380



LED Ambient Light

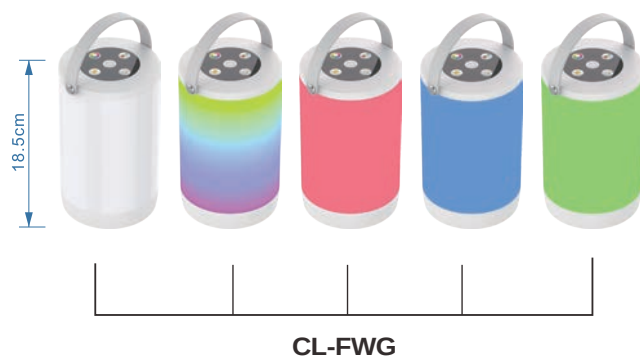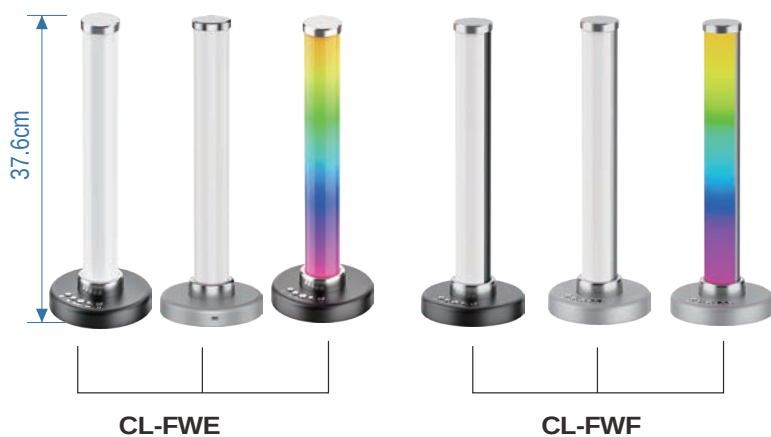


Model:	CL-FWE	CL-FWF	CL-FWG
Voltage:	DC3.7V/4400mAh	DC3.7V/4400mAh	DC3.7V/3600mAh
Power(W):	3.5	1.7	5
Body Material:	ABS+PC	ABS+PC+Aluminum alloy	ABC+PC
Led Type:	5050RGB+2835W	5050RGB+2835W	5050RGB+2835W
Led Qty(pcs):	36+36	18+18	25+30
CRI(Ra):	>80	>80	>80
Led Color:	RGB+W	RGB+W	RGB+W
Product Size(mm):	ø130*ø45*376	ø130*ø45*376	ø110*185



LED Ambient Light



LED Strip: 2m or 4m

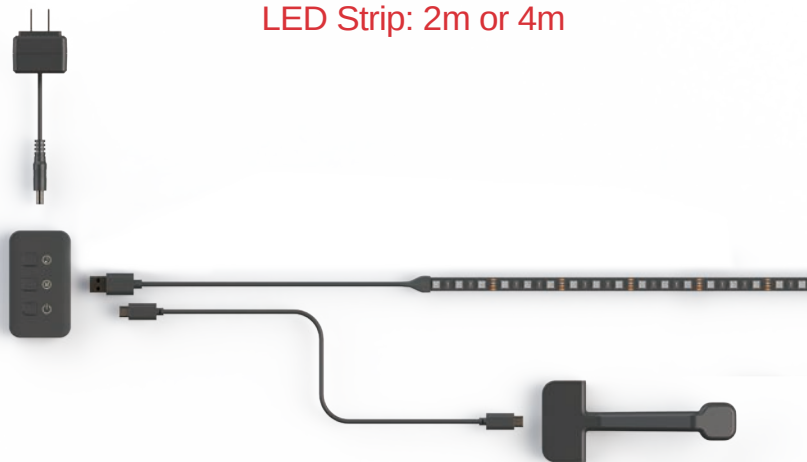

CL-TV01



Model:	CL-TV01
Voltage:	DC5V
Power(W):	5W
Body Material:	ABS
Led Type:	5050
Led Qty(pcs):	135
CRI(Ra):	/
Led Color:	RGB
Product Size(mm):	2000/4000(LED Strip)



LED RGB WHIP LIGHT



CL-GQ01



- ON/OFF Switch
- 358 Dynamic Modes
- Speed Levels+ -
- Brightness+ -
- Monochrome display
- Remote control ID Match
- Static monochrome modes



Model:	CL-GQ01
Voltage:	DC9-32V
Power(W):	9W
Body Material:	ALU+PC
Led Type:	5050
Led Qty(pcs):	240
CRI(Ra):	/
Led Color:	RGB
Product Size(mm):	1.2M

LED Camping Lamp



Model:	CL-YDB	CL-YDC	CL-CTD-A	CL-JZD-B
Power Supply:	3.2V 5000mAh	3.7V 4400mAh	AC 230V	AC 230V
Power(W):	5	5	3.5	3.5
Body Material:	ABS+PC	ABS+PC	ABS+PC+ Carbon steel	ABS+PC+ Carbon steel
Led Type:	2835	2835	2835	2835
Led Qty(pcs):	30	30	15	15
Luminous Flux(lm):	500±10%	500±10%	250±10%	250±10%
CRI(Ra):	>80	>80	>80	>80
CCT(K):	3000/4000/6000	3000/4000/6000	3000/4000/6000	3000/4000/6000
Product Size(mm):	80*80*180	80*80*250	Ø80*392	Ø80*375
Sensor Mode:	Button Switch	Button Switch	Rotary Switches	Rocker switch
Switch Mode:	25%50%100%	25%50%100%	OFF/ON	OFF/ONFF
Charging Time(h):	5~6	4~5	/	/
Working Time(h):	≥4	≥4	/	/

Solar Intelligent Sensor Light

PIR Sensor
Delay time : 30S



It is automatically charged during the day.

CL-TYH



CL-TYB



PIR sensor



CL-TYF




PIR sensor



Model:	CL-TYH-3W	CL-TYB-2W	CL-TYB-3W	CL-TYF
Power Supply:	3.7V 1500mAh	3.7V 1500mAh	3.7V 1500mAh	3.7V 1200mAh
Power(W):	3	2	3	0.55
Body Material:	ABS	ABS	ABS	ABS
Led Type:	2835	2835	2835	2835
Led Qty(pcs):	24	10	14	20
Luminous Flux(lm):	300 ± 10%	120 ± 10%	250 ± 10%	100 ± 10%
CRI(Ra):	>80	>80	>80	>80
CCT(K):	3000/4000/6000	3000/4000/6000	3000/4000/6000	3000/4000/6000
Product Size(mm):	97*46*123	100*138*69	100*138*69	95*125*50
Sensor Mode:	PIR Sensor	PIR Sensor	PIR Sensor	PIR Sensor
Sensor Distance(m):	4~6	4~6	4~6	4~6
Delay Time:	30s	30s	30s	30s
Switch Mode:	ON/OFF	ON/OFF	ON/OFF	ON/OFF
Charging Time(h):	4	4	4	4
Working Time(h):	≥2.6	≥2.6	≥2.6	≥2.6
IP Rating:	IP 65	IP 65	IP 65	IP 65

LED Solar Ground Light

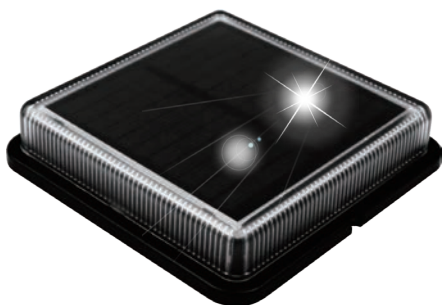

CL-DDA



5.5v 0.88w Solar Panel
4 Hours Charge 100%
3.7V 700/800mAh Battery




Light Sensor Switch
Auto Turn On Light 20lm
1-2 Nights



Safety and
energy saving



Waterproof
outdoor

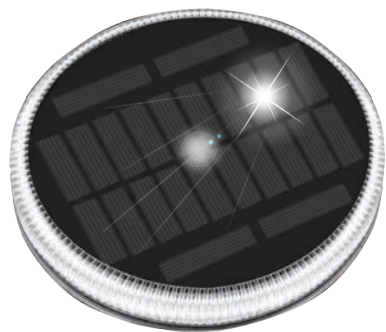

CL-DDB



This solar light will be on automatically at night,
which is very smart and sensitive


FC CE RoHS

Model:	CL-DDA	CL-DDB
Power Supply:	3.2V 500mAh / 3.7V 800mAh	3.2V 500mAh / 3.7V 800mAh
Power(W):	0.4	0.4
Body Material:	ABS+PC	ABS+PC
Led Type:	2835	2835
Led Qty(pcs):	12	24
Luminous Flux(lm):	15 ± 5%	15 ± 5%
CRI(Ra):	>80	>80
CCT(K):	3000/4000/6000	3000/4000/6000
Product Size(mm):	110*110*22	Φ 109*22
Sensor Mode:	Lighting Sensor	Lighting Sensor
Switch Mode:	NO	NO
Charging Time(h):	4	4
Working Time(h):	16	16
IP Rating:	IP 67	IP 67

Combination Touch Lamp (DIY)



CL-MKD-C

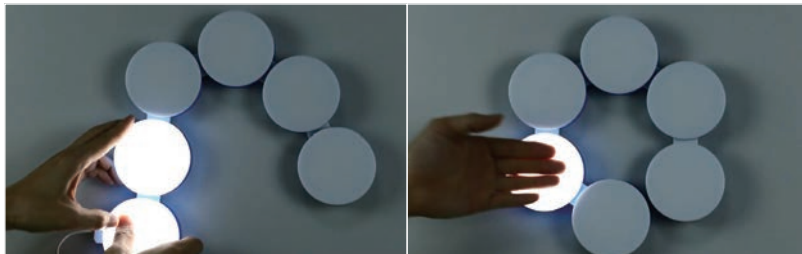

1. The conductive suction bridge is placed on the concave metal position of the product and on the place that the next production touch lamp wants to place.
2. Put another touch lamp on the conductive suction bridge, the other touch lamp and so on.
3. Random combination. Suck the other input head at the concave metal of any touch lamp and turn on the power supply.
4. Touch the sensing area lightly, the lamp will turn on, touch the lamp again and then it will go out.



Magnetic suction



Random combination




Touch sensor




Noctilucous

Model:	CL-MKD-C
Voltage:	DC 12V
Power(W):	1
Body Material:	ABS+PC
Led Type:	2835
Led Qty(pcs):	48
CCT(K):	3000/4000/6000/R/G/B
Product Size(mm):	Φ 82.5*20
Sensor Mode:	Touch sensor
IP Rating:	IP 20

LED Connected Lamp(DIY)

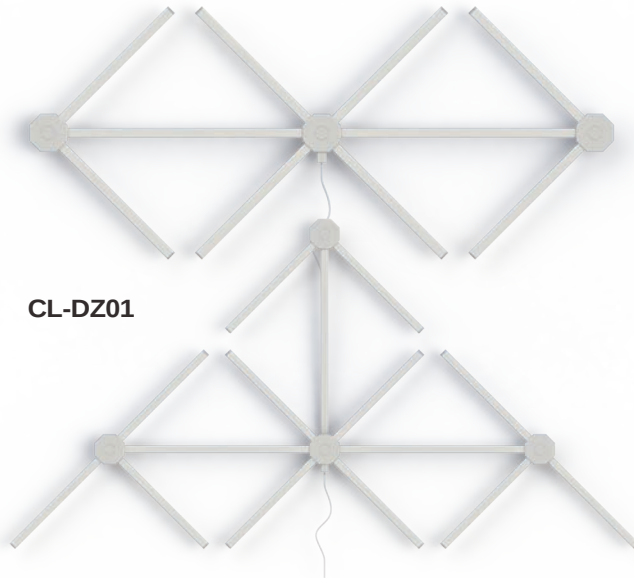

CL-DZ01

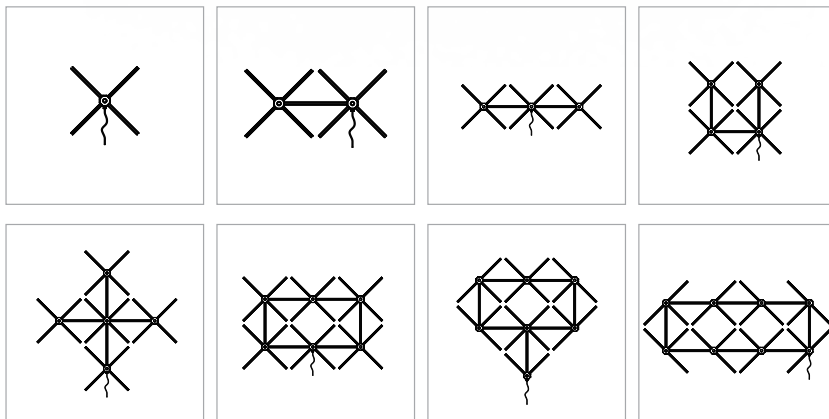

Model:	CL-DZ01
Voltage:	DC12V/24V
Power(W):	16
Body Material:	aluminum alloy+ABS+PC
Led Type:	5050+2835
Led Qty(pcs):	120(5050)+120(2835)
CRI(Ra):	>80
Led Color:	RGB+W
Product Size(mm):	ø130*1045