

**→** 120.00 mm →



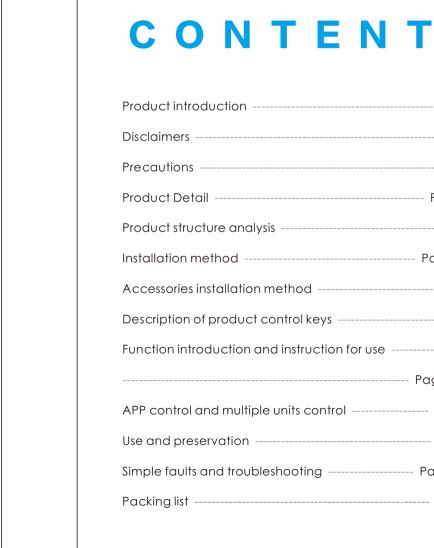

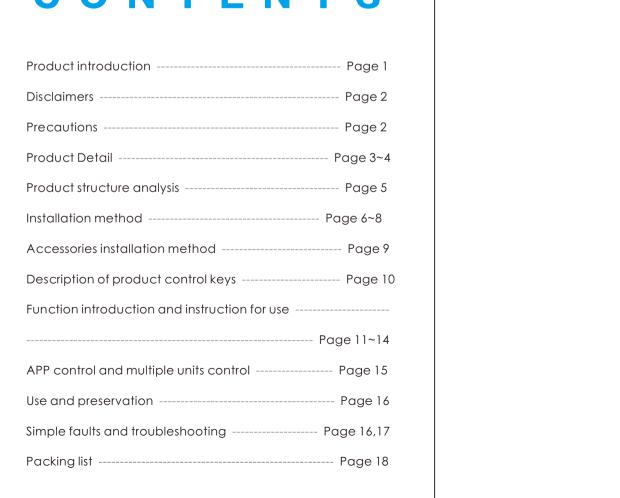

Welcome to use "GVM-680RS / GVM-880RS". This product is specially designed for senior photographers. The product usage scenarios are suitable for live oduct correctly. If you don't obey the instructions and warnings, yo broadcast/outdoor/studio photography, etc., and can also be used for YouTube video shooting. The main features of the product are:

se to take full responsibility for the use of this product and possib ① Infinitely adjustable RGB color and dual color temperature characteristics, brightness/color temperature RGB hue/color purity can be controlled at will, color temperature range 3200K~5600K. The use of high CRI LED lamp beads helps restore and enrich the color of the object, providing you with natural

to reduce energy loss.

- ② The APP intelligent control system can be controlled by your smart mob
- ③ With LCD screen display and stable system, it supports 360° rotation, whi can effectively control light. You can also install folding and soft light boar
- to avoid excess light, make the light softer, and customize the control fill light, allowing you to shoot the desired results easily and easily. 8 kinds of scene lights can be simulated: lightning, police car, candlelight
   TV, broken light bulb, party, disco, paparazzi.

and vivid shooting effects.

- We firmly believe that the correct use of this product will definitely be help to your shooting work. It is strongly recommended that you read the following user guide carefully before using the product.

Product Name : Photography lights

Product Type : Photography Fill Light Product material : Aluminum alloy Lamp beads quantity: 560

- Product Size ( mm ): 270\*318\*40

### Cooling: Natural heat dissipation Commodity origin : China. Huizhou

- Brightness: 8500lux/0.5m; 3000lux/1m
   Light adjustment method: Step-less adjustment
   Features / Features: RGB, SAT, APP, Joint control, Special light,

# Product model: GVM-880RSBrand: GVM

Color rendering index : ≥97

# ◆ Hue: RGB 0~360°◆ SAT: 0%~100%

Color temperature: 3200K~5600K

- Product Name : Photography lights Product Type : Photography Fill Light
- Product material : Aluminum alloy Lamp beads quantity: 752

- Light adjustment method: Step-less adjustment
   Features / Features: RGB, SAT, APP, Joint control, Special light,

- ♦ Voltage : AC:100-240V♦ Power supply mode : DC input&Battery
- Power supply: DC15V/4A
   Battery Capacity: 7.4V-4400mAh\*2 (to be purchased separate

◆ SAT: 0%~100%

- Brightness: 11200lux/0.5m; 3600lux/1m
- High color rendering index light beads, Upgrade LED scree
- Power supply: DC15V/4A

- Commodity origin : China. Huizhou


- ♦ Voltage : AC:100-240V

Color temperature: 3200K~5600K

- Power supply mode : DC input&Battery
- Battery Capacity: 7.4V-4400mAh\*2 (to be purchased separately Product Weight: 1.2 KG
- Product Size ( mm ): 270\*318\*40 Cooling: Natural heat dissipation

# 1 The lamp can be installed and fixed on the bracket by rotating the known clockwise, and unloaded by rotating in the counterclockwise direction

3 Loosen the adjustment knobs on both sides of the U-bracket, adjust the angle of the panel you need, and then tighten the adjustment knobs on both sides of the U-bracket.

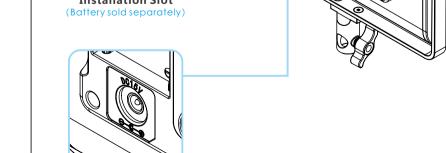

There are two power supply modes to choose.

Connect the power cord and adapter for power supply.

Purchase two other suitable lithium batteries and use them for power

supply.( both battery cells must be plugged in to power )

# Light control folding can control the Angle of light. Align the front mounting holes with the screw holes of the hinges and lock the latches with screws.

# 3 Mode control button: Change mode control4 Change channel button: When is in master/slave mode, press this button to select the channel.

- Rotate, slave, master, APP
- 5 Brightness adjustment button: Adjust the brightness6 Multifunctional button: Press once to switch light mode. Press fo
- seconds to enter/exit the scene mode; Spin the knob to adjust the Slave mode: The channel can only be adjusted through the lacktriangle and lacktriangleparameters of the current light mode. buttons of the controller behind the light. When the channels of the slave

# and the master are the same, they can be synchronously controlled by

The screen display the current brightness, control mode, light mode, light parameters, scene number, channel numerical, and battery power of the light.

Rota Sla Mas AP

## 6 Adjust SAT: range 0%~100%

- In Master mode / Rotate mode, short press the composite knob to switch annel can be synchronously controlled through the controller behind
- In APP mode, connect to APP and adjust SAT through APP.

SAT: Adjustable light color saturation, range 0%~100% In Master mode/Rotate mode, long press for 3 seconds and press the composite knob to enter/exit scene light (SC) mode. At this time, short press the composite knob to select scenes, all scenes can be adjusted by rotating the brightness adjustment knob; the current scene When it is car, ③Candlelight, ④TV, ⑤Bad light bulb, ⑥Party, ⑦Disco, ⑧f

## scene No. ⑤, turn the compound knob to adjust the color temperature when the current scene is scene No. ⑥ or ⑦, turn the compound knob to adjust the time. (Other scenes can only adjust the brightness). • In the APP mode, connect to the APP and adjust the scene through the APP.

others to Slave mode, and set the channel (CH) of the master and slav

ime, the connected APP mode machine can be controlled through the

bbile phone APP, and the slave machine of the same channel as the

CCT: Adjustable color temperature, range 3200K~5600K

Adjust brightness (BRG): range 0%~100%
 In Master mode / Rotate mode, turn the brightness adjustment adjust the brightness.

• In APP mode, connect to APP and adjust brightness through A

HUE: Adjustable light color, range 0~360°

In Master mode/Slave mode, tap the plus/minus key to set the channel value.In APP mode, connect to APP and set the channel value through APP. • In Master mode / Rotate mode, short press the composite knob to the light mode to CCT, and then turn the composite knob button to adjust

Switch the photography light to the APP mode, connect the Bluetooth of the camera light through the mobile phone, and then use the APP to control the brightness, color temperature, hue, sat, scene, channel, and on/off of the camera light. If there is a slave, you can also go through the APP Perform

**Power:** Make sure the power is in the demanded range, not too high or too low. Correctly load the battery, in order not the damage to machine.

Repairing: If there is fault or performance degradation, do not unpack the shell by

Accessories: Please use the accessories provided by manufacturer and approved ones, in order to maximize the performance.

Guarantee: Do does not modify the product, or you will lose the right of maintenance.

① Check the matching power adapter indicator light up ch

the "ON" state, the display and the display an

Power cord 1 2 3 1 2 3

① In the Master mode / Rotate mode, lightly press the compound knob button to switch to SAT, then turn the

Check whether the color purity
SAT value is too low or 0; the
color purity value is 100, the
color difference is most obvious.

Check whether the color purity
switch to SAT, then turn
compound knob button to
increase the color purity;

In WIFI mode, connect APP,
adjust color pure SAT
through APP.

APP can't in APP mode and whether connect "BT\_LED" is displayed on the