



LUMIMAN


Wizard of Light



GR-SDA00130

HARSTAD MELVIK


Smart LED Strip

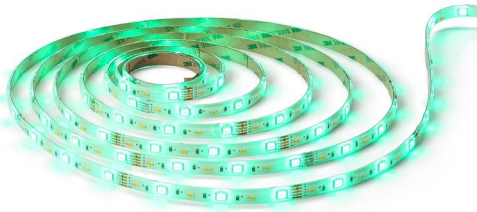

Input Voltage: DC12V / 24V
Power: 5W/M Max
LED Qty: 60LEDs/M
LED Chip Source: 5050 RGB 30LED+
2835 W 30LEDs

Color Temp: RGB+W
Lifespan: 20000H
Beam Angle: 120°
Luminuos Flux: C/W-220lm/M
RGB-50lm/M

IP Rate: IP20 / IP44
Wi-Fi Protocol: 2.4GHz
Wi-Fi Standard: IEEE 802.11b/g/n
Bluetooth Protocol: 4.2
Bluetooth Standard: IEEE 802.15.1
Width: 10mm
Lenght: 2m / 3m / 5m / 10m

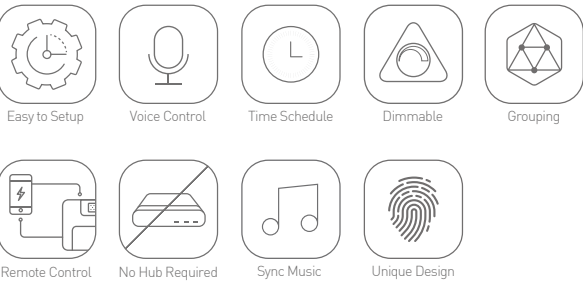

GR-SDA00133

HARSTAD NUNAAT


Smart LED Strip



Input Voltage: DC12V / 24V
Power: 5W/M Max
LED Qty: 90LEDs/M
LED Chip Source: 5050 RGB 30LEDs+
2835 CW 30LEDs+
2835 WW 30LEDs

Color Temp: RGB+CCT
Lifespan: 20000H
Beam Angle: 120°
Luminuos Flux: CCT-220lm/M
RGB-50lm/M

IP Rate: IP20 / IP44
Wi-Fi Protocol: 2.4GHz
Wi-Fi Standard: IEEE 802.11b/g/n
Bluetooth Protocol: 4.2
Bluetooth Standard: IEEE 802.15.1
Width: 12mm
Lenght: 2m / 3m / 5m / 10m

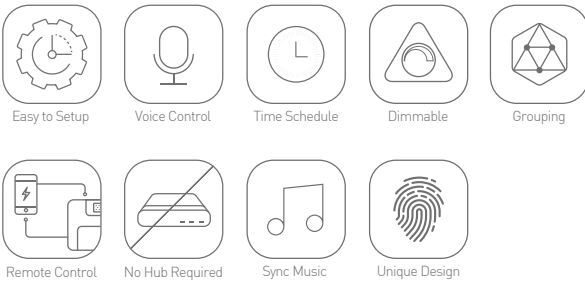




GR-SDA00140

HARSTAD SIRKKA


Smart LED Strip

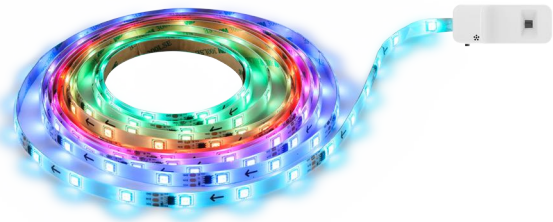

Input Voltage: DC12V / 24V
Power: 5W/m Max
LED Qty: 30LEDs/M
LED Chip Source: 5050RGB+IC

Color Temp: RGB
Lifespan: 20000H
Beam Angle: 120°
Luminuos Flux: 50lm/M

IP Rate: IP20 / IP44
Wi-Fi Protocol: 2.4GHz
Wi-Fi Standard: IEEE 802.11b/g/n
Bluetooth Protocol: 4.2
Bluetooth Standard: IEEE 802.15.1
Width: 10mm
Length: 2m / 3m / 5m

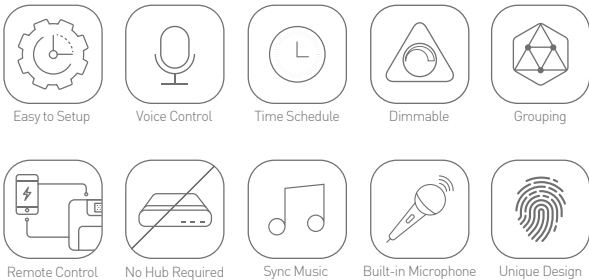

GR-SDA00150

HARSTAD INARI


Smart LED Strip



Input Voltage: 24V
Luminous Flux: 50Lm/m
LED Chip Source: 5050SMD
LED Qty.: 5050 RGB 60LEDs/m

Color Temp.: RGB
Lifespan: 20000H
Beam Angle: 120°
IP Rate: IP67

Wi-Fi Protocol: 2.4GHz
Wi-Fi Standard: IEEE 802.11b/g/n
Bluetooth Protocol: 4.2
Bluetooth Standard: IEEE 802.15.1
Width: 8mm
Length: 5m

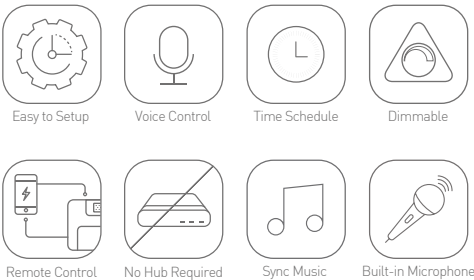



GR-SFA0101-10

LAGOON

Smart Fairy Light

Input Voltage: DC5V
Power Supply: USB
LED Chip Source: Point Control RGB
LED Qty.: 50 / 100 / 132

Color Temp: RGB
Lifespan: 20000H
Beam Angle: 360°
IP Rate: IP20

Wi-Fi Protocol: 2.4GHz
Wi-Fi Standard: IEEE 802.11b/g/n
Bluetooth Protocol: 4.2
Bluetooth Standard: IEEE 802.15.1
Product Dimmensions: 5m / 10m / 20m
Cable Length: 0.9m



GR-SFA0201-10


VEIL


Smart Fairy Light

Input Voltage: DC5V
Power Supply: USB
LED Chip Source: Point Control RGB
LED Qty.: 33 / 66

Color Temp: RGB
Lifespan: 20000H
Beam Angle: 360°
IP Rate: IP65

Wi-Fi Protocol: 2.4GHz
Wi-Fi Standard: IEEE 802.11b/g/n
Bluetooth Protocol: 4.2
Bluetooth Standard: IEEE 802.15.1
Product Dimmensions: 10m
Cable Length: 0.9m



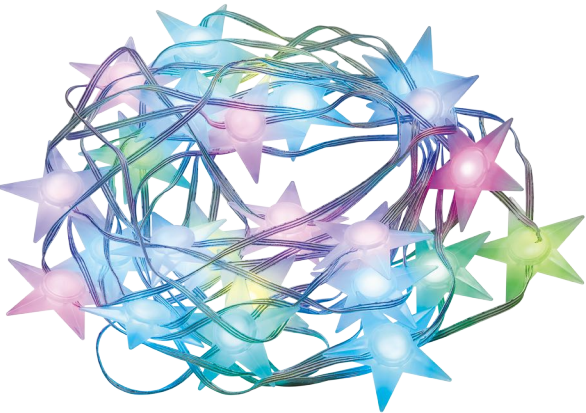

GR-SFA0301-10

SEICHI

Smart Fairy Light

Input Voltage: DC5V
Power Supply: USB
LED Chip Source: Point Control RGB
LED Qty.: 25 / 50

Color Temp: RGB
Lifespan: 20000H
Beam Angle: 360°
IP Rate: IP20

Wi-Fi Protocol: 2.4GHz
Wi-Fi Standard: IEEE 802.11b/g/n
Bluetooth Protocol: 4.2
Bluetooth Standard: IEEE 802.15.1
Product Dimmensions: 5m / 10m
Power Plug Cable Length: 0.9m



GR-SFA0401-10


KERALA

Smart Fairy Light

Input Voltage: DC5V
Power Supply: USB
LED Chip Source: Point Control RGB
LED Qty.: 33 / 66 / 132

Color Temp: RGB
Lifespan: 20000H
Beam Angle: 360°
IP Rate: IP65

Wi-Fi Protocol: 2.4GHz
Wi-Fi Standard: IEEE 802.11b/g/n
Bluetooth Protocol: 4.2
Bluetooth Standard: IEEE 802.15.1
Product Dimmensions: 5m / 10m / 20m
Cable Length: 0.9m





GR-SFA0501-10


ELKMONT

Smart Fairy Light

Input Voltage: DC5V
Power Supply: USB
LED Chip Source: Point Control RGB
LED Qty.: 25 / 50

Color Temp: RGB
Lifespan: 20000H
Beam Angle: 360°
IP Rate: IP65

Wi-Fi Protocol: 2.4GHz
Wi-Fi Standard: IEEE 802.11b/g/n
Bluetooth Protocol: 4.2
Bluetooth Standard: IEEE 802.15.1
Product Dimmensions: 5m / 10m
Power Plug Cable Length: 0.9m

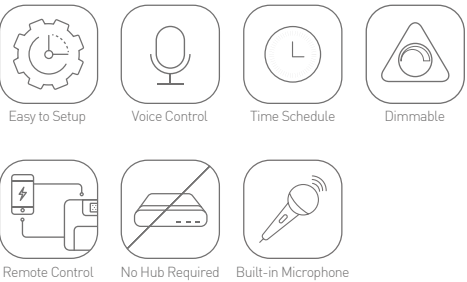

GR-SFA0601-10


KAMPUNG

Smart Fairy Light

Input Voltage: DC5V
Power Supply: USB
LED Chip Source: Point Control RGB
LED Qty.: 25 / 50

Color Temp: RGB
Lifespan: 20000H
Beam Angle: 360°
IP Rate: IP65

Wi-Fi Protocol: 2.4GHz
Wi-Fi Standard: IEEE 802.11b/g/n
Bluetooth Protocol: 4.2
Bluetooth Standard: IEEE 802.15.1
Product Dimmensions: 5m / 10m
Power Plug Cable Length: 0.9m

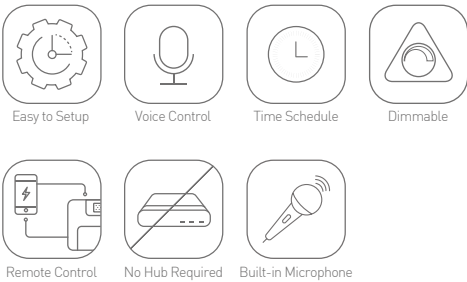




GR-SDL0101
YOYO+

Smart Down Light

Input Voltage: AC100-265V
Voltage Frequency: 50/60Hz
Power: 4.5W/5W
Color Temp: 2700-6500K
Luminous Flux: 300lm/350lm

Beam Angle: 48°
Driver Type: IC Driver
Lifespan: 20000H
Pst: ≤ 1
Svm: ≤ 0.9

IP Rate: IP20
Wattage on Standby: < 0.5W
Bluetooth Protocol: 4.2
Bluetooth Standard: IEEE 802.15.1
Product Dimensions: Φ90*45mm



CCT

Easy to Setup

Voice Control

Time Schedule

Dimmable

Remote Control

No Hub Required

Biorhythm



GR-SDL0102
YOYO+

Smart Down Light

Input Voltage: AC100-265V
Voltage Frequency: 50/60Hz
Power: 4.5W/5W
Color Temp: RGB+CCT
Luminous Flux: 300lm/350lm

Beam Angle: 48°
Driver Type: IC Driver
Lifespan: 20000H
Pst: ≤ 1
Svm: ≤ 0.9

IP Rate: IP20
Wattage on Standby: < 0.5W
Wi-Fi Protocol: 2.4GHz
Wi-Fi Standard: IEEE 802.11b/g/n
Bluetooth Protocol: 4.2
Bluetooth Standard: IEEE 802.15.1
Product Dimensions: Φ90*45mm

Easy to Setup

Voice Control

Time Schedule

Dimmable

Remote Control


Sync Music

Biorhythm

No Hub Required



RGB+CCT



CCT

GR-SDL0602

DENKA

Smart Down Light

Input Voltage: AC220-240V	Driver Type: Non-isolated Driver
Voltage Frequency: 50Hz	Lifespan: 20000H
Power: 6/9/12/18/24W	Ra: > 80
Color Temp: 3000-6500K	Pst: ≤ 1
Luminous Flux: 450/765/1080/1710/2280lm	Svm: ≤ 0.9
Beam Angle: 110°	DF: ≥ 0.7 / ≥ 0.7 / ≥ 0.9 / ≥ 0.9 / ≥ 0.9

IP Rate: IP20
Wattage on Standby: < 0.5W
Wi-Fi Protocol: 2.4GHz
Wi-Fi Standard: IEEE 802.11b/g/n
Bluetooth Protocol: 4.2
Bluetooth Standard: IEEE 802.15.1
Product Dimensions: Φ95*26mm/Φ120*26mm/Φ145*26mm
Φ170*26mm/Φ225*26mm




GR-SDL0602

DENKA S

Smart Down Light

Input Voltage: AC220-240V	Driver Type: Non-isolated Driver
Voltage Frequency: 50Hz	Lifespan: 20000H
Power: 6/9/12/18/24W	Ra: > 80
Color Temp: 3000-6500K	Pst: ≤ 1
Luminous Flux: 450/765/1080/1710/2280lm	Svm: ≤ 0.9
Beam Angle: 110°	DF: ≥ 0.5 / ≥ 0.5 / ≥ 0.7 / ≥ 0.7 / ≥ 0.7

IP Rate: IP20
Wattage on Standby: < 0.5W
Wi-Fi Protocol: 2.4GHz
Wi-Fi Standard: IEEE 802.11b/g/n
Bluetooth Protocol: 4.2
Bluetooth Standard: IEEE 802.15.1
Product Dimensions: 95*95*26mm/120*120*26mm/145*145*26mm
170*170*26mm/225*225*26mm



CCT




GR-SDL0501-12

UMN AK

Smart Retrofit Recessed Light

Input Voltage: AC110~130V	LED Chip Source: 24PCS 2700K+
Voltage Frequency: 60Hz	24PCS 6500K 6V 150mA 2835SMD+
Power: 12W	7PCS RGB 3535SMD
Luminous Flux: 960lm	Driver Type: Non-isolated+linear driver
Efficiency: 80lm/W	Color Temperature: 2700K-6500K+RGB

Wi-Fi Protocol: 2.4GHz
Wi-Fi Standard: IEEE 802.11b/g/n
Bluetooth Protocol: 4.2
Bluetooth Standard: IEEE 802.15.1
Product Dimensions: Φ186*H60mm

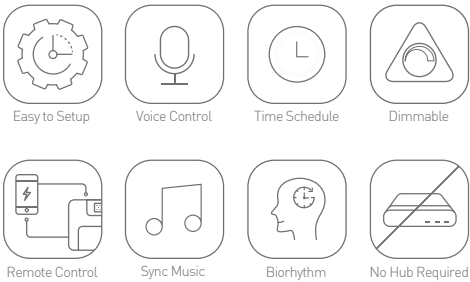


GR-SCL2201

A I N

Smart LED Ceiling

Input Voltage: AC220-240V	Efficiency: 80lm/W
Voltage Frequency: 50/60 Hz	Beam Angle: 120°
Power: 18/24W	Driver Type: Non-isolated Power
Color Temp: 3000-6000K	Ra: >80
Lifespan: 20000H	DF: ≥0.7

Wattage on Standby: < 0.5W
Wi-Fi Protocol: 2.4GHz
Wi-Fi Standard: IEEE 802.11b/g/n
Bluetooth Protocol: 4.2
Bluetooth Standard: IEEE 802.15.1
Product Dimensions: Φ300*30mm / Φ420*35mm

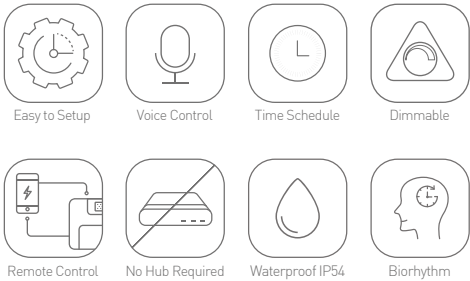



GR-SCL1605


VEGA+

Smart LED Ceiling

Input Voltage: AC175-265V
Voltage Frequency: 50/60 Hz
Power: 12W / 18W / 20W / 24W
Color Temp: 2700-6500K
Lifespan: 20000H

Efficiency: 80lm/W
Beam Angle: 110°
Driver Type: Non-isolated Power Driver
Ra: > 80
DF: ≥ 0.7

Pst: ≤ 1
Svm: ≤ 0.9
Wattage on Standby: < 0.5W
Wi-Fi Protocol: 2.4GHz
Wi-Fi Standard: IEEE 802.11b/g/n
Bluetooth Protocol: 4.2
Bluetooth Standard: IEEE 802.15.1
Product Dimensions: Φ257*66mm/Φ330*70mm/Φ330*70mm/Φ370*71mm

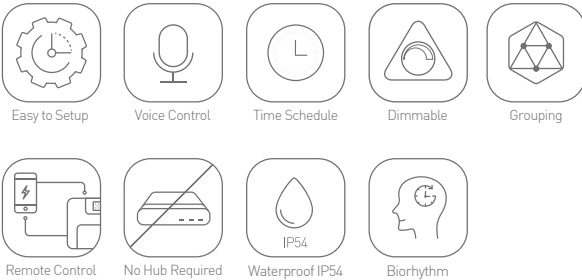

CCT



GR-SCL1901


TIAKI

Smart LED Ceiling

Input Voltage: AC100-277V
Voltage Frequency: 50/60 Hz
Power: 24W
Color Temp: 2700-6500K+RGB
Lifespan: 30000H

Efficiency: 100LM/W
Beam Angle: 120°
Driver Type: Non-isolated Power
Ra: >80
PF: >0.7

Wattage on Standby: < 0.5W
Wi-Fi Protocol: 2.4GHz
Wi-Fi Standard: IEEE 802.11b/g/n
Bluetooth Protocol: 4.2
Bluetooth Standard: IEEE 802.15.1
Product Dimensions: Φ350*85mm

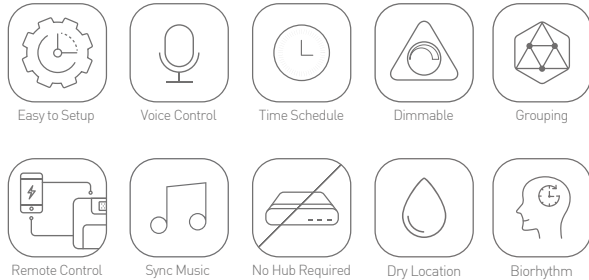


More Colors Available



CCT





GR-SCL1301


NUNKI+

Smart LED Ceiling

Input Voltage: AC220-240V/120V
Voltage Frequency: 50/60 Hz
Power: 12W / 18W / 24W
Color Temp: 2700-6500K
Lifespan: 20000H

Efficiency: 90lm/W
Beam Angle: 120°
Driver Type: Linear Driver+Non-isolated
Ra: >80
DF: ≥0.7 / PF: >0.5

Pst: ≤1
Svm: ≤0.9
Wattage on Standby: < 0.5W
Wi-Fi Protocol: 2.4GHz
Wi-Fi Standard: IEEE 802.11b/g/n
Bluetooth Protocol: 4.2
Bluetooth Standard: IEEE 802.15.1
Product Dimensions: Φ220*50mm / Φ280*50mm / Φ330*50mm

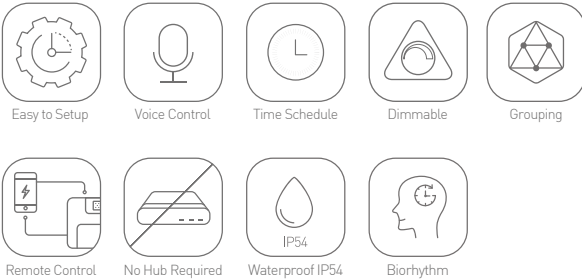

GR-SCL1401



NUNKI S+



Smart LED Ceiling

Input Voltage: AC220-240V/120V
Voltage Frequency: 50/60 Hz
Power: 12W / 18W / 24W
Color Temp: 2700-6500K
Lifespan: 20000H

Efficiency: 90lm/W
Beam Angle: 120°
Driver Type: Linear Driver+Non-isolated
Ra: >80
DF: ≥0.7 / PF: >0.5

Pst: ≤1
Svm: ≤0.9
Wattage on Standby: < 0.5W
Wi-Fi Protocol: 2.4GHz
Wi-Fi Standard: IEEE 802.11b/g/n
Bluetooth Protocol: 4.2
Bluetooth Standard: IEEE 802.15.1
Product Dimensions: 220*220*50mm / 280*280*50mm / 330*330*50mm

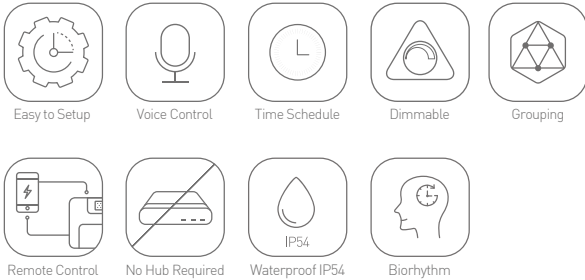

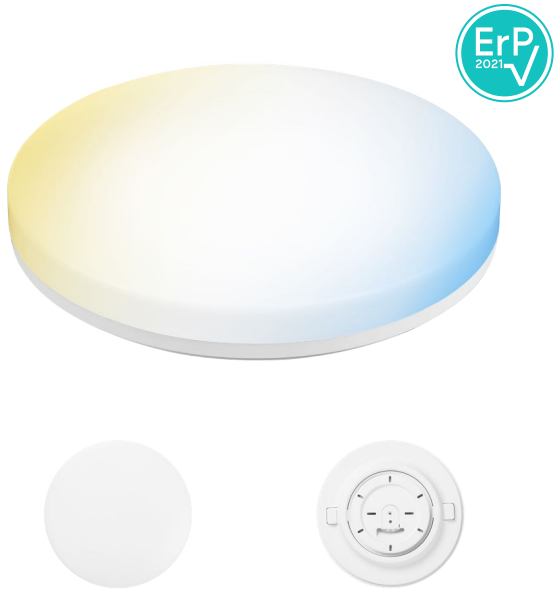

GR-SCL2101


POLLUX

Smart LED Ceiling

Input Voltage: AC220-240V
Voltage Frequency: 50/60 Hz
Power: 18W/24W
Color Temp: 3000-6500K
Lifespan: 20000H

Efficiency: 90lm/W
Beam Angle: 120°
Driver Type: Non-isolated Power
Ra: >80
DF: ≥0.7

Wattage on Standby: < 0.5W
Wi-Fi Protocol: 2.4GHz
Wi-Fi Standard: IEEE 802.11b/g/n
Bluetooth Protocol: 4.2
Bluetooth Standard: IEEE 802.15.1
Product Dimensions: Φ299*83mm / Φ345*85mm

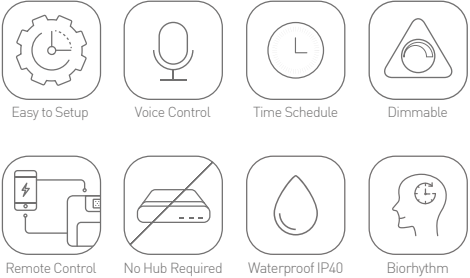

GR-SCL2102


POLLUX

Smart LED Ceiling

Input Voltage: AC220-240V
Voltage Frequency: 50/60 Hz
Power: 18W/24W
Color Temp: 3000-6500K+RGB
Lifespan: 20000H

Efficiency: 90lm/W
Beam Angle: 120°
Driver Type: Non-isolated Power
Ra: >80
DF: ≥0.7

Wattage on Standby: < 0.5W
Wi-Fi Protocol: 2.4GHz
Wi-Fi Standard: IEEE 802.11b/g/n
Bluetooth Protocol: 4.2
Bluetooth Standard: IEEE 802.15.1
Product Dimensions: Φ299*83mm / Φ345*85mm

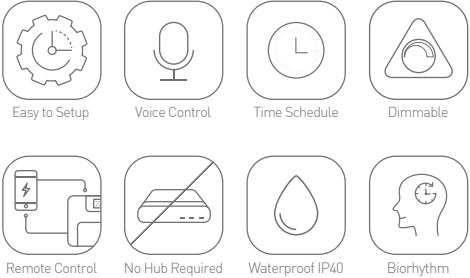




GR-SFL4301

SKIEN

Smart Flood Light

Voltage: 220-240V/100-277V	Luminous Flux: 1600/2400/4000lm
Voltage Frequency: 50/60 Hz	Color Temp.: RGB+3000K-6500K
Power: 20/30/50W	Lifespan: 20000H
LED Chip Source: RGB+SMD2835WW+SMD2835CW	Beam Angle: 120°
	IP Rate: IP65

Working Humidity:: < 96%
Bluetooth Protocol: 4.2
Bluetooth Standard: IEEE 802.15.1
Product Dimensions: 144*125*26/144*125*26/190*152*27mm




GR-SFL4401

SKIEN STRING

Smart Flood Light

Voltage: 110-130V/220-240V	Luminous Flux: 4*240lm
Voltage Frequency: 50/60 Hz	Color Temp.: RGB+2700K
Power: 12W (4*3W) RGB: 3W	Lifespan: 20000H
LED Chip Source: RGB SMD2835/SMD2835	Beam Angle: 120°
	IP Rate: IP65

Working Humidity:: < 96%
Bluetooth Protocol: 4.2
Bluetooth Standard: IEEE 802.15.1
Product Dimensions: 92.5*77.5*21.5mm





GR-SLL04011

CERES

Smart Outdoor Light

Voltage: 110-130V/220-240V	Luminous Flux: 4*240lm
Voltage Frequency: 50/60 Hz	Color Temp.: RGBWIC
Power: 12W (4*3W)	Lifespan: 20000H
LED Chip Source: SMD2835	Beam Angle: 100°
LED Qty.: R/G/B 3*3PCS+WW 3PCS	IP Rate: IP65


Working Humidity: < 96%
Wi-Fi Protocol: 2.4GHz
Wi-Fi Standard: IEEE 802.11b/g/n
Bluetooth Protocol: 4.2
Bluetooth Standard: IEEE 802.15.1
Product Dimensions: Single Lamp: Φ60*330mm
Total Length: 7.5m



Easy to Setup



Time Schedule



Remote Control



Dimmable



No Hub Required



Waterproof IP65



Linkable



Unique Design





GR-SLL05011


NINSAR

Smart Outdoor Light

Voltage: 110-130V/220-240V	Luminous Flux: 4*150lm
Voltage Frequency: 50/60 Hz	Color Temp.: RGBWIC
Power: 12W (4*3W)	Lifespan: 20000H
LED Chip Source: SMD2835	Beam Angle: 105°
LED Qty.: R/G/B 3*3PCS+WW 3PCS	IP Rate: IP65

Working Humidity:: < 96%
Wi-Fi Protocol: 2.4GHz
Wi-Fi Standard: IEEE 802.11b/g/n
Bluetooth Protocol: 4.2
Bluetooth Standard: IEEE 802.15.1
Product Dimensions: Single Lamp:Φ62*440mm
Total Length: 7.5m

RGBIC

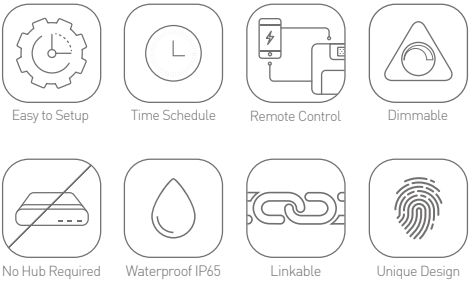

GR-SFA0901-7


KAAX

Smart Outdoor Light

Voltage: 110-130V/220-240V	Luminous Flux: 30lm Max
Voltage Frequency: 50/60 Hz	Color Temp.: RGBWIC
Power: 6W (Each bulb 0.5W*12pcs)	Lifespan: 20000H
LED Chip Source: SMD2835	Beam Angle: 200°
LED Qty.: Each Bulb 3PCS RGB+1PCS WW	IP Rate: IP65

Working Humidity:: < 96%
Wi-Fi Protocol: 2.4GHz
Wi-Fi Standard: IEEE 802.11b/g/n
Bluetooth Protocol: 4.2
Bluetooth Standard: IEEE 802.15.1
Product Dimensions: 7.3m/24FT

RGBIC

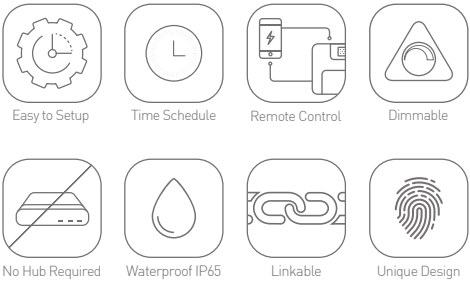





GR-SFR03011

AKNES

Smart Mood Light

Input Voltage: DC12V	Luminous Flux: 330lm
Voltage Frequency: 50/60 Hz	Color Temp.: RGBIC+W
Power: 11±1W	Lifespan: 10000H
LED Chip Source: 2835+5050SMD	Beam Angle: 125°
LED Qty.: (2835W) 90PCS+(5050RGB) 90PCS	IP Rate: IP20

Working Humidity:: < 80%
Wi-Fi Protocol: 2.4GHz
Wi-Fi Standard: IEEE 802.11b/g/n
Bluetooth Protocol: 4.2
Bluetooth Standard: IEEE 802.15.1
Product Dimensions: 383*383*1400mm

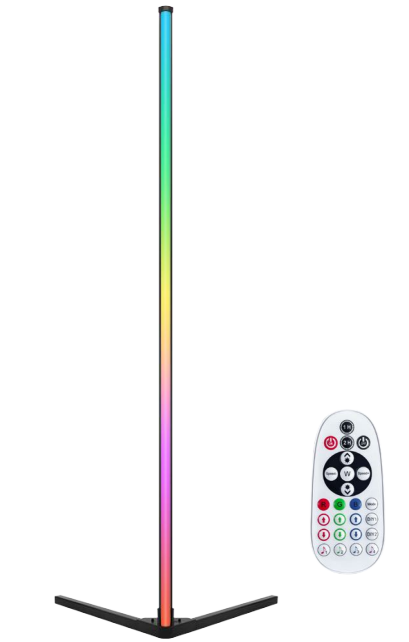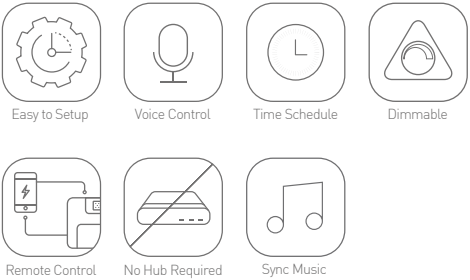


GR-SML02011

TOVIK


Smart Mood Light

Input Voltage: 5V	Color Temp.: RGBIC
Power: 5±1W	Lifespan: 10000H
Luminous Flux: RGB-35lm	Beam Angle: 128°
LED Chip Source: 5050RGB	IP Rate: IP20
LED Qty.: 30LEDs/single light	Working Humidity: < 80%

Wi-Fi Protocol: 2.4GHz
Wi-Fi Standard: IEEE 802.11b/g/n
Bluetooth Protocol: 4.2
Bluetooth Standard: IEEE 802.15.1
Product Dimensions: 30*30*300mm

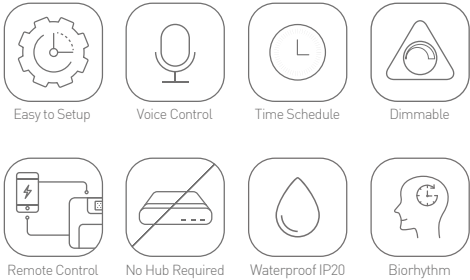

Smart Outdoor Lighting

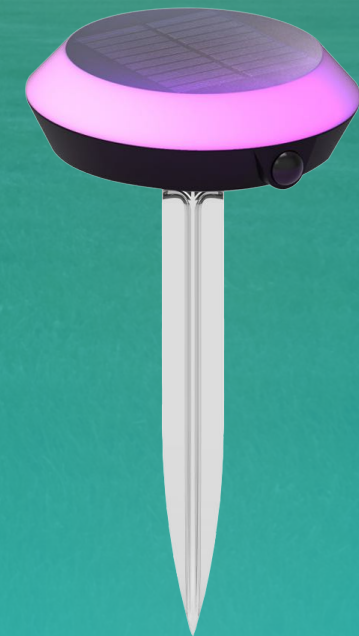



“ Meetings and dinners with friends in my garden are amazing now. I can create atmospheres and environments for every moment ”



GR-SLL01013

TAPIO+

Smart Solar Light

Input Voltage: DC5V
Voltage Frequency: 50/60 Hz
Power: Charging 5W / Light Up 1W
Color Temp: 2700-6500K+RGB
Charging Port: USB (TYPE C)

Luminous Flux: 70lm
Beam Angle: 120°
Power Source: 5V 1A
Battery: 1200mAh
Solar Panel: 5 V-ma

Operating Temperature: -20°C-45°C
Operating Humidity: 10%-100%
Wattage on Standby: < 0.5W
Bluetooth Mesh Protocol: 4.2
Bluetooth Mesh Standard: SIG General Standard
Product Dimensions: Φ159.5*270mm



Easy to Setup



Voice Control



Time Schedule



Dimmable



Sync Music



Solar Energy



Remote Control



Motion Detection



No Hub Required



Built-in Battery



Waterproof IP65



Daylight Sensor





GR-SLL03011

AREC

Smart Solar Light

Input Voltage: 5.5V	Luminous Flux: 30lm
Power: 1W	Color Temp.: RGB+CCT
Power Supply: 5.5V 1W solar panel(pet)	Beam Angle: 100°
LED Chip Source: 2835SMD+5050SMD	Lifespan: 10000Hrs
LED Qty.: 8WW+8CW+4RGB	Working Humidity: < 96%

IP Rate: IP65
Bluetooth Protocol: 4.2/5.0
Bluetooth Standard: IEEE 802.15.1
Product Dimensions: 145*106*360mm



GR-SBH0701

EKHI


Smart Solar Light

Power: 3W	Luminous Flux: 180lm
Solar Panel: 5.5V 210ma	Color Temp.: RGB+CCT
LED Chip Source: RGB 2835SMD/2835SMD	Beam Angle: 120°
LED Qty.: 2700K SMD2835 42PCS+6500K SMD2835 42PCS+16PCS RGBSMD2835	Lifespan: 10000Hrs
	Working Humidity: < 96%

IP Rate: IP44
Bluetooth Protocol: 4.2
Bluetooth Standard: SIG General Standard
Product Dimensions: 115*200*77mm




More Colors Available

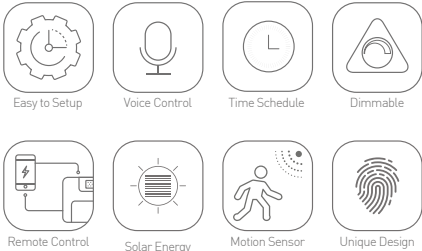

Smart Plug



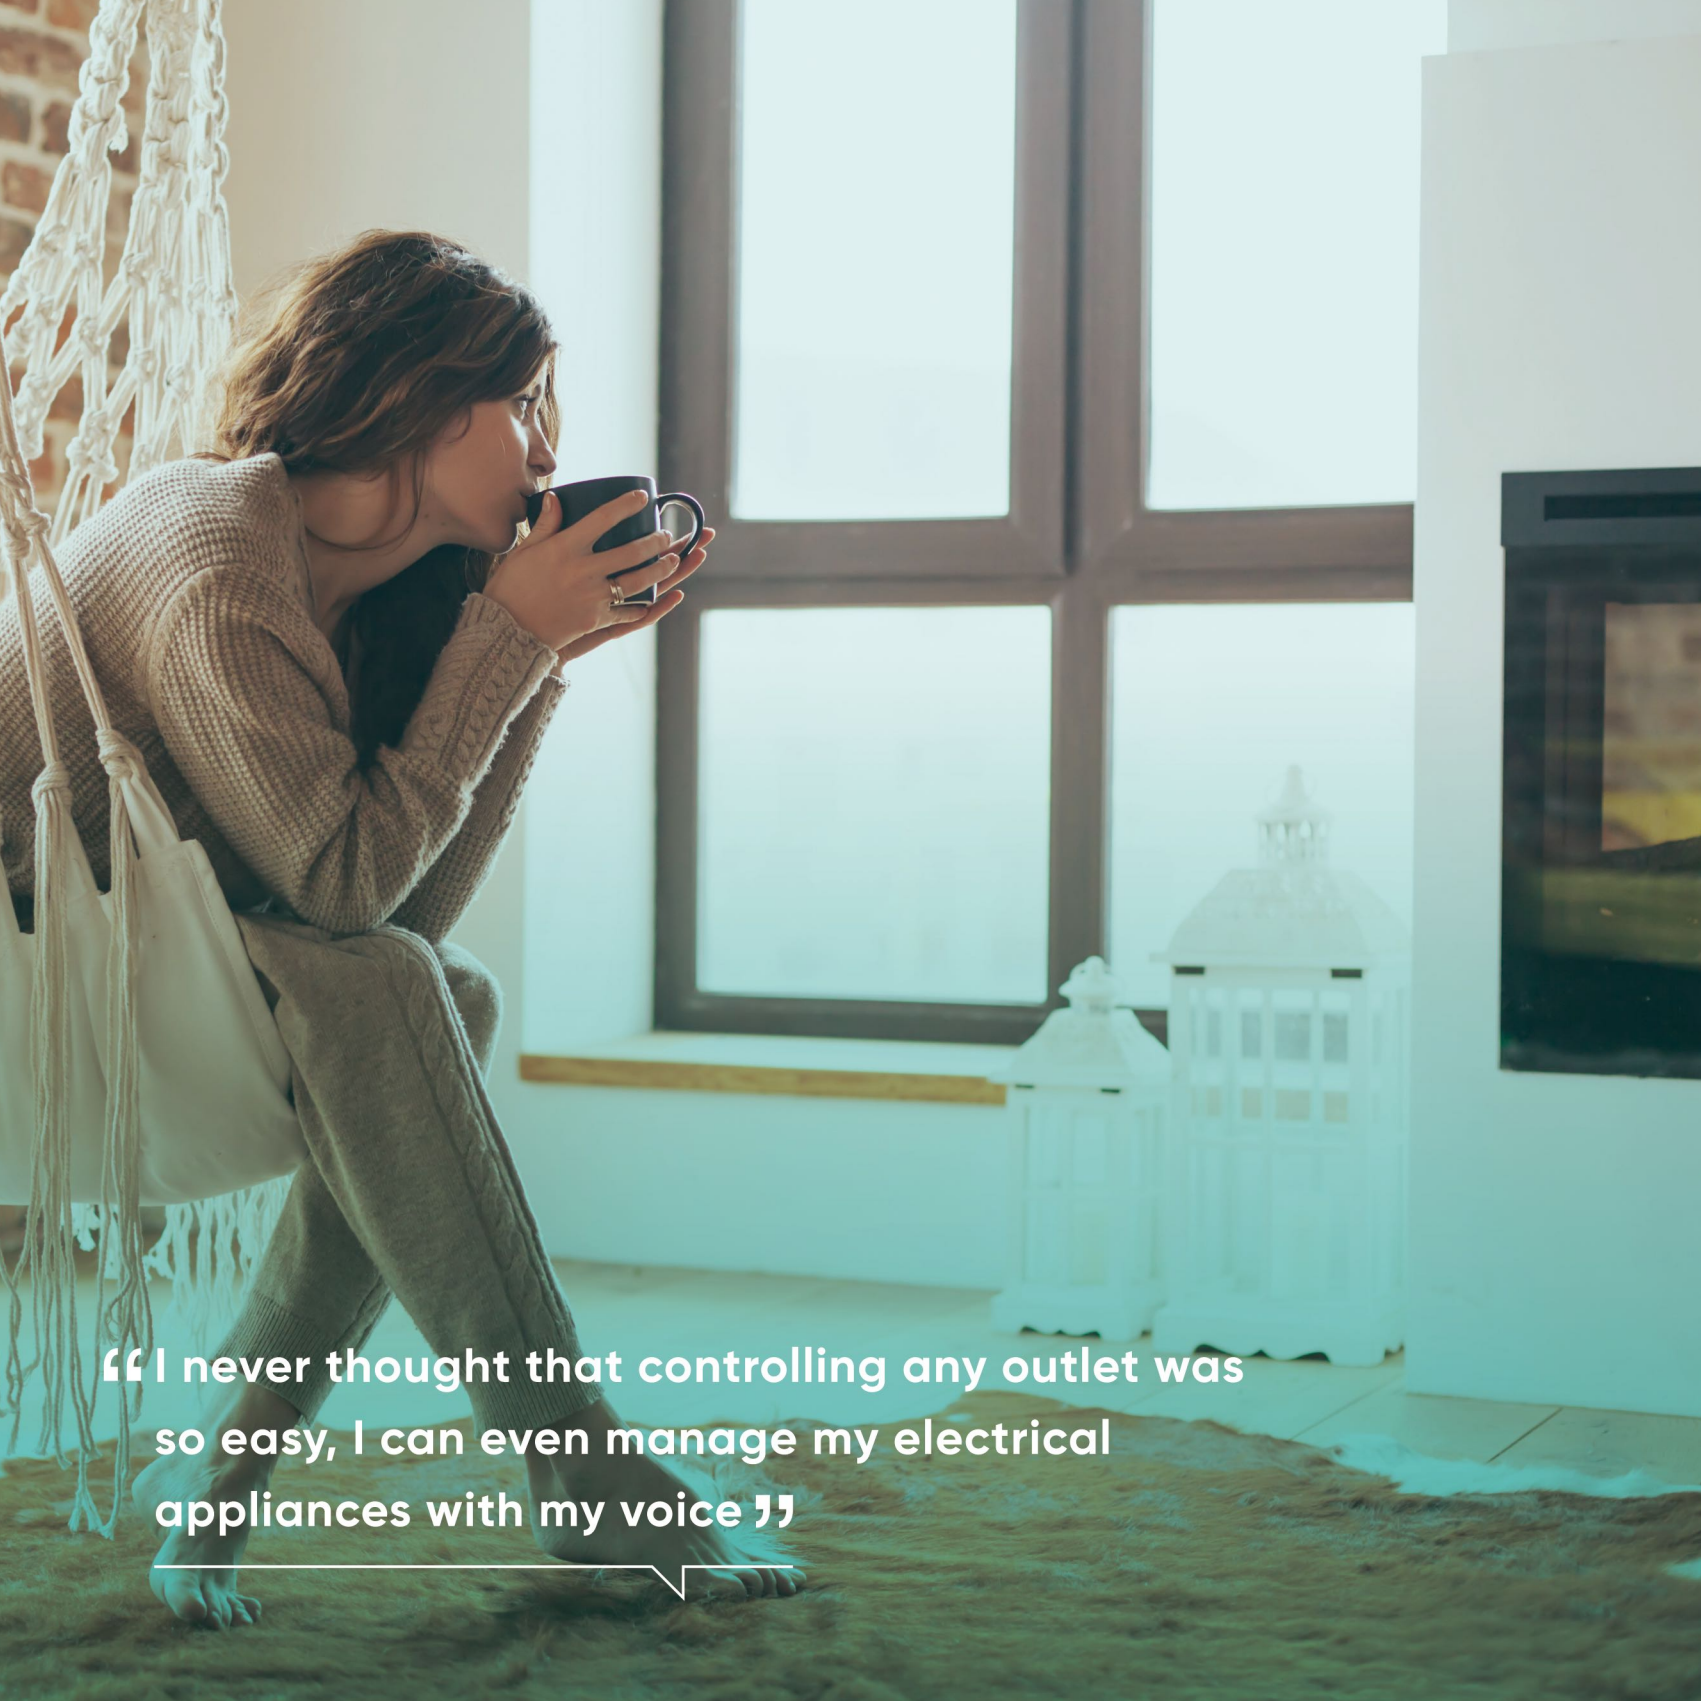

“I never thought that controlling any outlet was so easy, I can even manage my electrical appliances with my voice”



GR-SSC30010

AVAL

Smart Plug

Input Voltage: AC100-240V
Voltage Frequency: 50/60Hz
Maximum Power: 3680W
Max.Load Current: 16A
Operating Temperature: -10°C-45°C

Operating Humidity: 68%
Wi-Fi Protocol: 2.4GHz
Wi-Fi Standard: IEEE 802.11b/g/n
Bluetooth Protocol: 4.2
Bluetooth Standard: IEEE 802.15.1
Product Dimensions: 55*55*77mm



Easy to Setup




Voice Control



Time Schedule



No Hub Required



Remote Control



Type E



Overload Protection






GR-SSC38010

HOAN

Smart Plug

Input Voltage: AC110-130V
Voltage Frequency: 50/60Hz
Maximum Power: 1800W
Max.Load Current: 15A
Operating Temperature: -10°C-50°C

Wi-Fi Protocol: 2.4GHz
Wi-Fi Standard: IEEE 802.11b/g/n
Bluetooth Protocol: 4.2
Bluetooth Standard: IEEE 802.15.1
Product Dimensions: 88*39*51mm

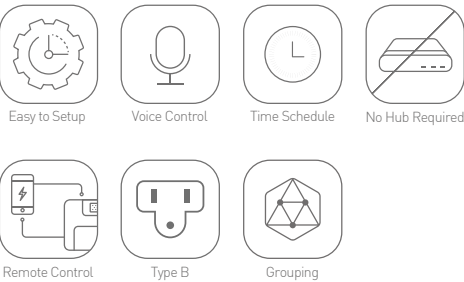


GR-SSC38011

HARP

Smart Plug

Input Voltage: AC110-130V
Voltage Frequency: 50/60Hz
Maximum Power: 1800W
Max.Load Current: 15A
Operating Temperature: -10°C-50°C

Wi-Fi Protocol: 2.4GHz
Wi-Fi Standard: IEEE 802.11b/g/n
Bluetooth Protocol: 4.2
Bluetooth Standard: IEEE 802.15.1
Product Dimensions: 88*39*51mm

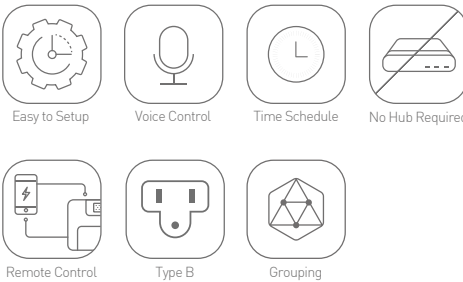



GR-SSC39010


HITE

Smart Plug



Input Voltage: AC125V
Voltage Frequency: 60Hz
Maximum Power: 1875W
Max.Load Current: 15A
Operating Temperature: -25°C-50°C

Operating Humidity: 80%
Wi-Fi Protocol: 2.4GHz
Wi-Fi Standard: IEEE 802.11b/g/n
Bluetooth Protocol: 4.2
Bluetooth Standard: IEEE 802.15.1
Product Dimensions: 131*40*55mm



GR-SSC39011


HART

Smart Plug



Input Voltage: AC125V
Voltage Frequency: 60Hz
Maximum Power: 1875W
Max.Load Current: 15A
Operating Temperature: -25°C-50°C

Operating Humidity: 80%
Wi-Fi Protocol: 2.4GHz
Wi-Fi Standard: IEEE 802.11b/g/n
Bluetooth Protocol: 4.2
Bluetooth Standard: IEEE 802.15.1
Product Dimensions: 131*40*55mm

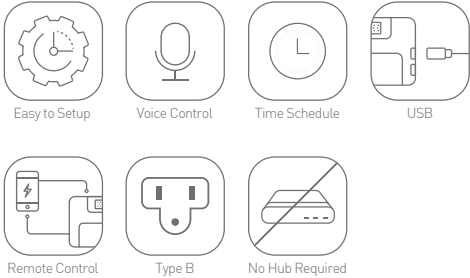



GR-SOP02030

TRIBERG

Smart Outdoor Plug

Input Voltage: AC220-240V
Voltage Frequency: 50/60Hz
Maximum Power: 2000W
Max.Load Current: 8.7A
Operating Temperature: -20°C-35°C

Operating Humidity: 80%
Wi-Fi Protocol: 2.4GHz
Wi-Fi Standard: IEEE 802.11b/g/n
Product Dimensions: 60*52*96mm



GR-SOP02040

ANGON

Smart Outdoor Plug

Input Voltage: AC220-240V
Voltage Frequency: 50/60Hz
Maximum Power: 2000W
Max.Load Current: 8.7A
Operating Temperature: -20°C-35°C

Operating Humidity: 80%
Wi-Fi Protocol: 2.4GHz
Wi-Fi Standard: IEEE 802.11b/g/n
Product Dimensions: 60*52*79mm






GR-SSC03011

TAPPAN

Smart Outdoor Plug

Input Voltage: AC125V
Voltage Frequency: 60Hz
Maximum Power: 1875W
Max. Load Current: 15A
Operating Temperature: -25°C-50°C

Operating Humidity: 80%
Wi-Fi Protocol: 2.4GHz
Wi-Fi Standard: IEEE 802.11b/g/n
Bluetooth Protocol: 4.2
Bluetooth Standard: IEEE 802.15.1
Product Dimensions: 69*38*288mm




GR-SSC03010

TAPPAN+

Smart Outdoor Plug


Input Voltage: AC125V
Voltage Frequency: 60Hz
Maximum Power: 1875W
Max. Load Current: 15A
Operating Temperature: -25°C-50°C

Operating Humidity: 80%
Wi-Fi Protocol: 2.4GHz
Wi-Fi Standard: IEEE 802.11b/g/n
Bluetooth Protocol: 4.2
Bluetooth Standard: IEEE 802.15.1
Product Dimensions: 89*38*333mm



Smart Power Strip



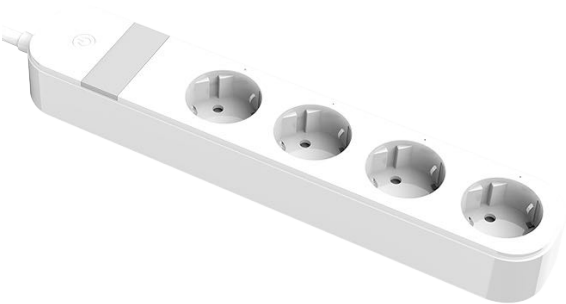


GR-SPS31010

TOLVIAC

Smart Power Strip

Input Voltage: AC220-240V	Operating Temperature: -10°C-45°C
Voltage Frequency: 50/60 Hz	Material: PC
Max. Power: 3680W	Connections: 4 socket
Max.Load Current: 16A	Product Dimensions: 295*57*41mm

Wi-Fi Protocol: 2.4GHz
Wi-Fi Standard: IEEE 802.11b/g/n
Bluetooth Protocol: 4.2
Bluetooth Standard: IEEE 802.15.1

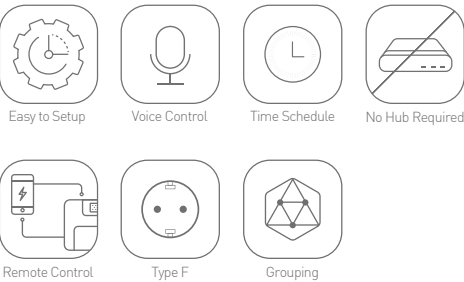



GR-SPS31011


TOLVIAC+

Smart Power Strip

Input Voltage: AC220-240V	Operating Temperature: -10°C-45°C
Voltage Frequency: 50/60 Hz	Material: PC
Max. Power: 3680W	Connections: 4 socket+2 USB+1 Type-C
Max.Load Current: 16A	Product Dimensions: 295*57*41mm

Wi-Fi Protocol: 2.4GHz
Wi-Fi Standard: IEEE 802.11b/g/n
Bluetooth Protocol: 4.2
Bluetooth Standard: IEEE 802.15.1

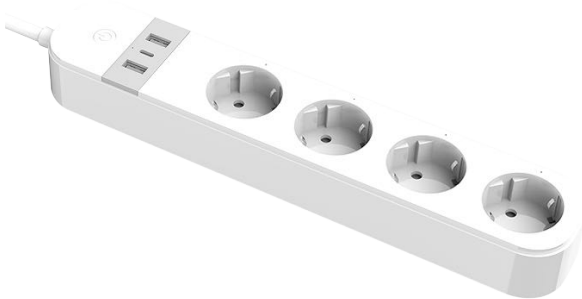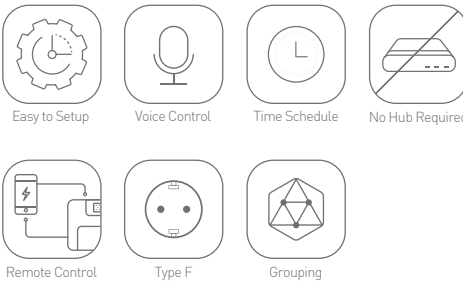

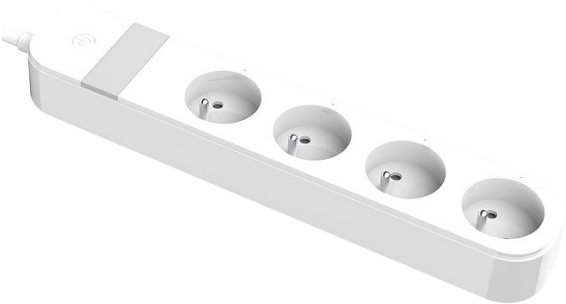


GR-SPS41010

TEMSE

Smart Power Strip

Input Voltage: AC220-240V	Operating Temperature: -10°C-45°C
Voltage Frequency: 50/60 Hz	Material: PC
Max. Power: 3680W	Connections: 4 socket
Max.Load Current: 16A	Product Dimensions: 295*57*40mm

Wi-Fi Protocol: 2.4GHz
Wi-Fi Standard: IEEE 802.11b/g/n
Bluetooth Protocol: 4.2
Bluetooth Standard: IEEE 802.15.1

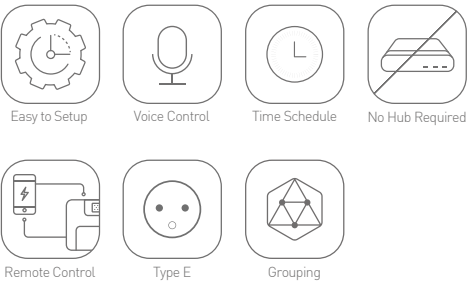


GR-SPS41011


TEMSE+

Smart Power Strip

Input Voltage: AC220-240V	Operating Temperature: -10°C-45°C
Voltage Frequency: 50/60 Hz	Material: PC
Max. Power: 3680W	Connections: 4 socket+2 USB+1 Type-C
Max.Load Current: 16A	Product Dimensions: 295*57*40mm

Wi-Fi Protocol: 2.4GHz
Wi-Fi Standard: IEEE 802.11b/g/n
Bluetooth Protocol: 4.2
Bluetooth Standard: IEEE 802.15.1

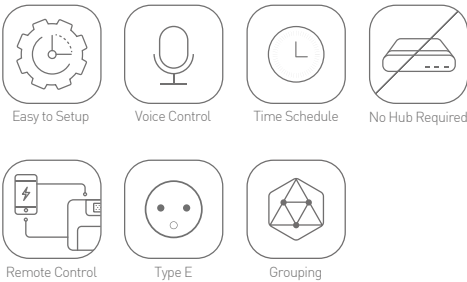

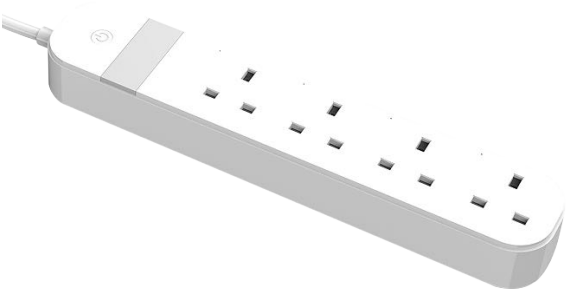



GR-SPS51010

ELVET

Smart Power Strip

Input Voltage: AC220-240V	Operating Temperature: -10°C-45°C
Voltage Frequency: 50/60 Hz	Material: PC
Max. Power: 2990W	Connections: 4 socket
Max.Load Current: 13A	Product Dimensions: 295*57*36mm

Wi-Fi Protocol: 2.4GHz
Wi-Fi Standard: IEEE 802.11b/g/n
Bluetooth Protocol: 4.2
Bluetooth Standard: IEEE 802.15.1

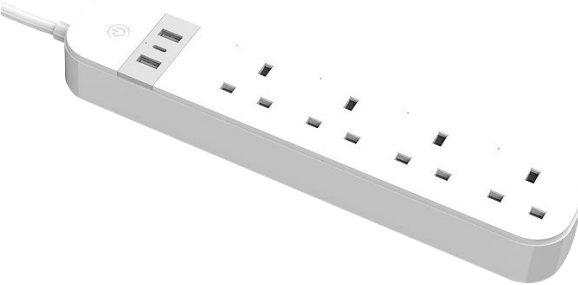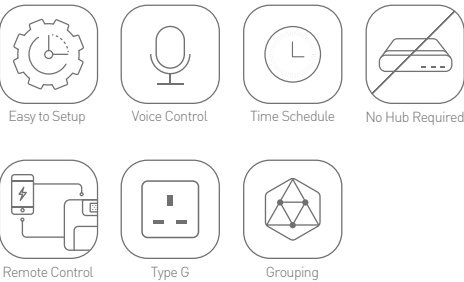


GR-SPS51011

ELVET+

Smart Power Strip

Input Voltage: AC220-240V	Operating Temperature: -10°C-45°C
Voltage Frequency: 50/60 Hz	Material: PC
Max. Power: 2990W	Connections: 4 socket+2 USB+1 Type-C
Max.Load Current: 13A	Product Dimensions: 295*57*36mm

Wi-Fi Protocol: 2.4GHz
Wi-Fi Standard: IEEE 802.11b/g/n
Bluetooth Protocol: 4.2
Bluetooth Standard: IEEE 802.15.1

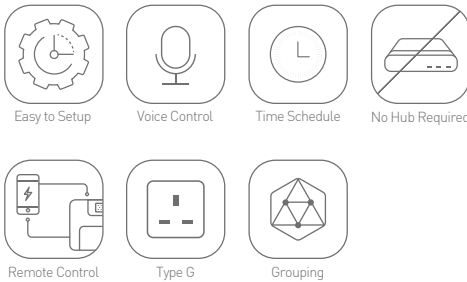

Smart Camera






GR-SIP09010
OAO

Smart Indoor Camera

Input Voltage: AC100-240V	Video Modes: 1920*1080P/1280*720P
Power: DC5V/1A	Image Sensor: 2 megapixeles
Voltage Frequency: 50/60 Hz	Sensor size: 1/2.9" CMOS
Beam Angle Vision: Pan: 0-355°/Tilt: 0-70°	Microphone: 35dB
Frame Rate(fps): 20 per sencond	Motion Dection: 90°&10 meters

TF Card Slot: 128GB	Wi-Fi Protocol: 2.4GHz
Operating Temperature: -10°C-55°C	Wi-Fi Standard: IEEE 802.11b/g/n
Warranty: 1 year	Product Dimensions: 91*75*119mm

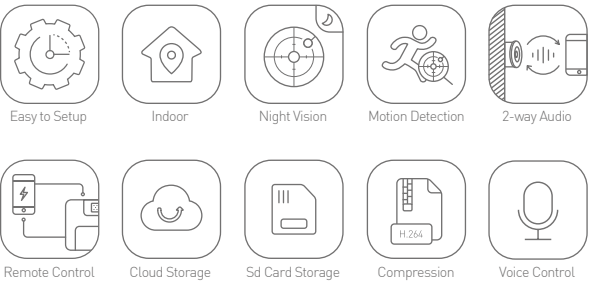


GR-SIP07010
TESS

Smart Indoor Camera

Input Voltage: AC100-240V	Video Resolution: 1080P (1920*1080)
Power: DC5V/2A	Video Compression Standard: H.264
Voltage Frequency: 50/60 Hz	Sensor Type: 1/2.7" Color CMOS
IP Rate: IP20	Image Frame Rate: 1-25per second
Beam Angle Vision: Pan: 0-355°/Tilt: 0-180°	Motion Dection: 3-5m

Lens: 2.8mm	Wi-Fi Standard: 802.11b/g/n
Operating Temperature: -20°C-50°C	Wi-Fi Protocol: 2.4GHz-2.4835
Operating Humidity: 20-95%	TF Card Slot: 128GB
Radio Protocol: Wi-Fi	Product Dimensions: Φ74*114mm
	Warranty: 1 year

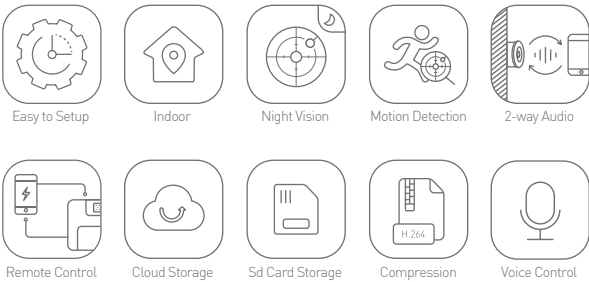

Smart Sensor



“ Now I am notified of any unforeseen event
in real-time when I am away from home ”




GR-SOS01010

HELM

Smart Motion Sensor

Input Voltage: DC4.5V	Maximum Detection Distance: 8m
Power Source: Battery Power	Maximum Detection Angle: 120°
Battery (Type and mAh): 3xAAA Battery	Operating Temperature: -10°C-50°C
Rotatable Bracket Angle: 90° up and down, 90° left and right	Operating Humidity: 0-90%
	IP Rate: IP20

Wi-Fi Protocol: 2.4GHz
Wi-Fi Standard: IEEE 802.11b/g/n
Bluetooth Protocol: 4.2
Bluetooth Standard: IEEE 802.15.1
Product Dimensions: 65*65*61mm

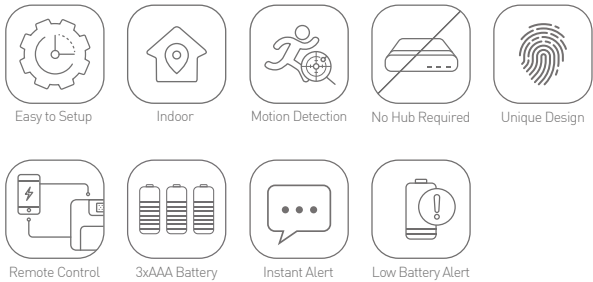




GR-SDS01010
HELM

Smart Door / Window Sensor

Input Voltage: DC3V	Flame Retardant Rating: V0
Power Source: Battery Power	Magnetic Contact: 1.27cm
Battery (Type and mAh): 2xAAA Battery	IP Rate: 20
Standby Current: 34uA	Material: PC

Wi-Fi Protocol: 2.4GHz
Wi-Fi Standard: IEEE 802.11b/g/n
Bluetooth Protocol: 4.2
Bluetooth Standard: IEEE 802.15.1
Product Dimensions: 70*27*23mm / 46*15*14mm

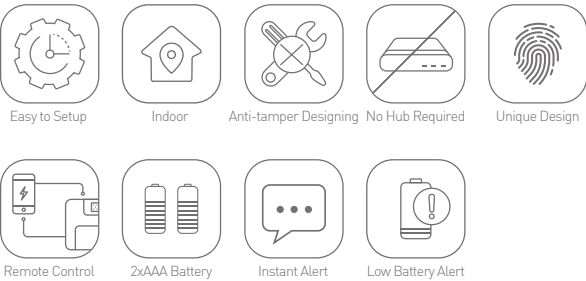


GR-SWS01012
HELM

Smart Water Sensor

Input Voltage: DC3V	Wattage on Standby: ≤5μA
Material: ABS	Operating Temperature: 0°C-45°C
Battery: Alkaline Battery	Operating Humidity: 0-90%

Wi-Fi Protocol: 2.4GHz
Wi-Fi Standard: IEEE 802.11b/g/n
Bluetooth Protocol: 4.2
Bluetooth Standard: IEEE 802.15.1
Product Dimensions: 70*25*20mm

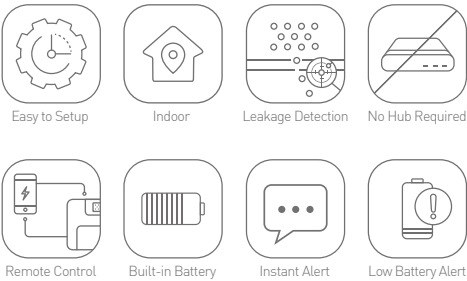



GR-SSS01010

SINANN

Smart Security Light

Input Voltage: 100-265V
Voltage Frequency: 50/60 Hz
Power: 24V
Power Supply: AC mains
Luminous Flux: 2400lm

LED Chip Source: 2835SMD
LED Qty.: 88WW+88CW
Color Temp.: CCT (3000-6500K)
Lifespan: 25000H
IP Rate: IP65

Beam Angle: 120°
Working Temperature: -10°C-45°C
Working Humidity: < 96%
Material: ABS+PC
Angel: HORIZONTAL 90°,VERTICAL 90°

Wi-Fi Standard: 2.4GHz
Wi-Fi Protocol: IEEE 802.11b/g/n
Bluetooth Standard: 4.2
Bluetooth Protocol: IEEE 802.15.1
Product Dimensions: 205*205*180mm



Smart Remote Controller





GR-SRC03010

KECK

Smart Wi-Fi IR Remote Controller



Input Voltage: DC5V
Infrared Frequency: 38-56KHz
Wattage on Standby: $\leq 0.5W$
Infrared Direction: Multiple-direction
Operating Temperature: -20°C-50°C
Power Port: Type C

Operating Humidity: 80%
Wi-Fi Protocol: 2.4 GHz
Wi-Fi Standard: IEEE 802.11b/g/n
Product Dimensions: $\Phi 68 \times 21 \text{mm}$
Available Color: Black



GR-SRC04010


IRAS

Smart Wi-Fi IR Remote Controller



Input Voltage: DC5V
Infrared Frequency: 38-56KHz
Wattage on Standby: $\leq 0.5W$
Infrared Direction: Multiple-direction
Operating Temperature: -20°C-50°C
Power Port: Type C

Operating Humidity: 80%
Wi-Fi Protocol: 2.4 GHz
Wi-Fi Standard: IEEE 802.11b/g/n
Product Dimensions: $\Phi 68 \times 17 \text{mm}$
Available Color: Black

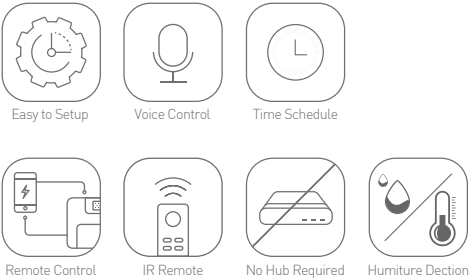

Smart Switch Module






GR-SMS06010

HITRA

Smart Switch Module

Input Voltage: AC100-240V
Voltage Frequency: 50/60Hz
Maximun Power: 3000W
Max. Current: 16A
Material: PC
Product Dimensions: 40*40*20mm

Operating Temperature: -20°C-70°C
Operating Humidity: <80%
Wi-Fi Protocol: 2.4GHz
Wi-Fi Standard: IEEE 802.11b/g/n

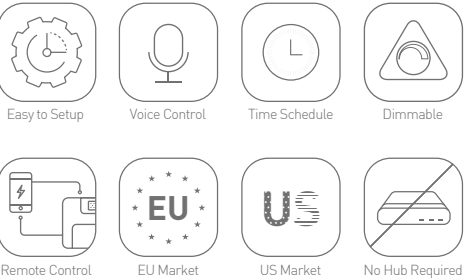



GR-SMS07010

ELBE

Smart Switch Module


Input Voltage: AC90-250V
Voltage Frequency: 50/60Hz
Maximun Power: 2200W Max
Max. Current: 10A
Material: PC+ABS
Product Dimensions: 91*25*42mm

Operating Temperature: -20°C-70°C
Operating Humidity: <80%
Wi-Fi Protocol: 2.4GHz
Wi-Fi Standard: IEEE 802.11b/g/n
Bluetooth Standard: 4.2
Bluetooth Protocol: IEEE 802.15.1

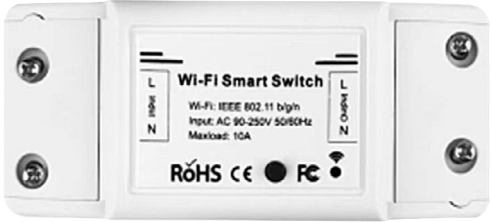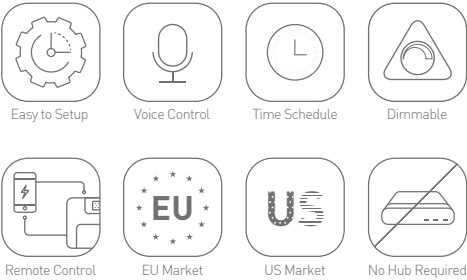

Smart Gateway



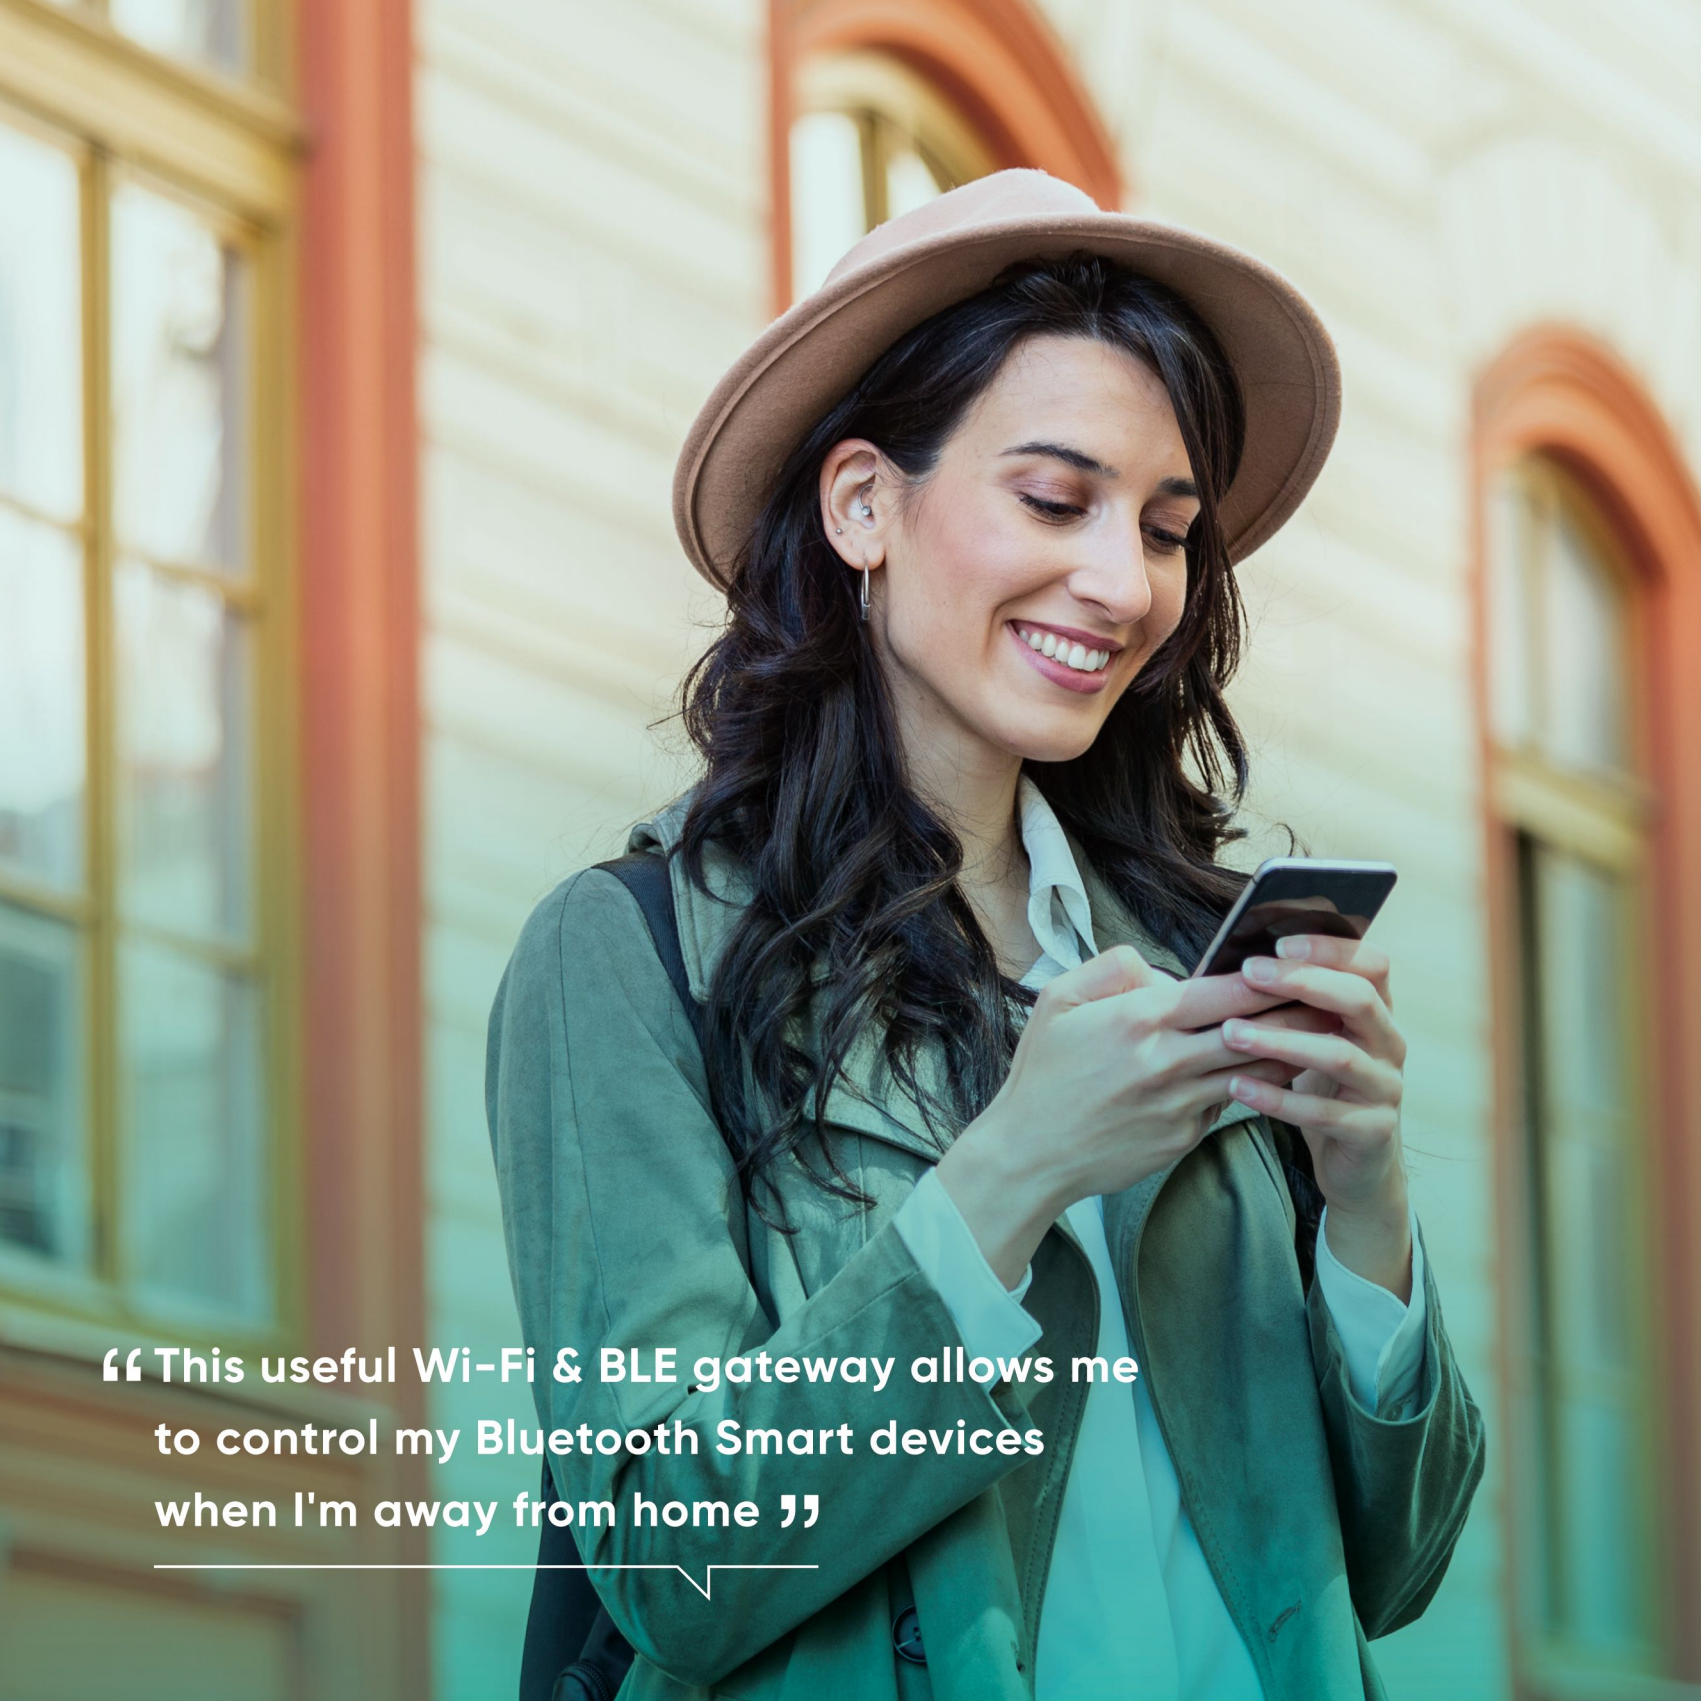

“ This useful Wi-Fi & BLE gateway allows me
to control my Bluetooth Smart devices
when I'm away from home ”



GR-SGW01010

AKARI


Smart Gateway

Input Voltage: DC5V
Infrared Frequency: 38-56KHz
Wattage on Standby: < 0.5W
Operating Temperature: -10°C-55°C
Operating Humidity: 10-90%

Wi-Fi Protocol: 2.4GHz
Wi-Fi Standard: IEEE 802.11b/g/n
Bluetooth Protocol: Mesh (SIG)
Bluetooth Standard: Bluetooth single point & Mesh
Product Dimensions: 65*65*14.2mm
Material: PC+ABS



Easy to Setup



Remote Control

