

包 装 信 息	型号: AME2C	备 注 信 息
	成品尺寸: 180*300MM	
	材质双铜内裱纸板+过光膜	
	工艺: 四色印刷	
	版本号: V1.0-20221213	




! READ INSTRUCTIONS BEFORE USING

We highly recommend you to read below instructions before you use Maonocaster E2. Please contact us for help if you meet any problems while using the product. You can find us via email: support@maono.com or visit Maono official site: www.maono.com.

Maonocaster E2 offers three-step microphone gain options to fit different types of microphones and show the best performance of microphones. You can find the control toggle printed "Microphone 1" on rear panel of Maonocaster E2.


Note1: Before connecting a XLR microphone to Maonocaster E2, please confirm the microphone type. Normally the output level of condenser and dynamic microphones are -30~-40dB, -50~-60dB separately.

Note2: Please confirm if your microphone requires phantom power. Usually XLR condenser Microphone requires 48V phantom power, while dynamic microphones don't.

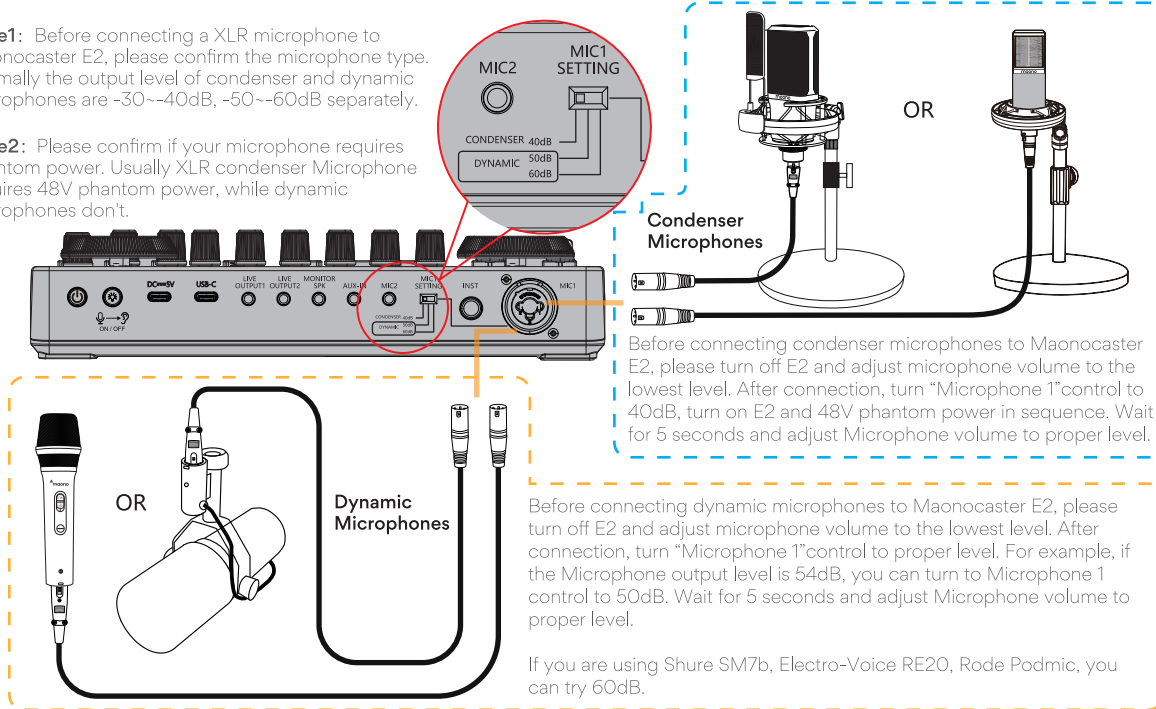

- * This Maonocaster E2 offers three-step mic gain options to fit different microphones. If there is voice crack caused, please adjust the "microphone 1" control to lower level. Or you can change a more proper microphone and use it with Maonocaster E2.
- * To protect you from hearing harm, we advise you to gradually switch from 40dB, 50dB and 60dB and find a proper level.


MAONOCASTER E2 INTERFACE PERSONAL AUDIO CONTENT CREATION

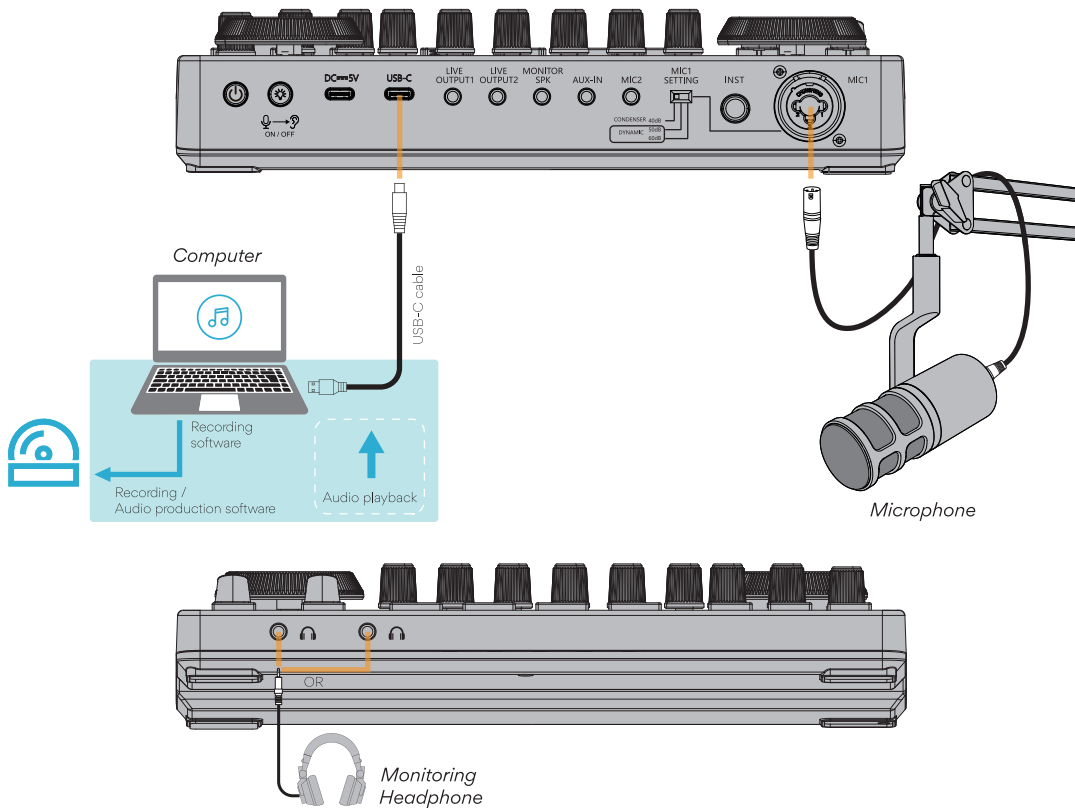


Microphones, Microphone Cables and Instrument Audio Cables are only included in select bundles.



COMPUTER & MOBILE STREAMING

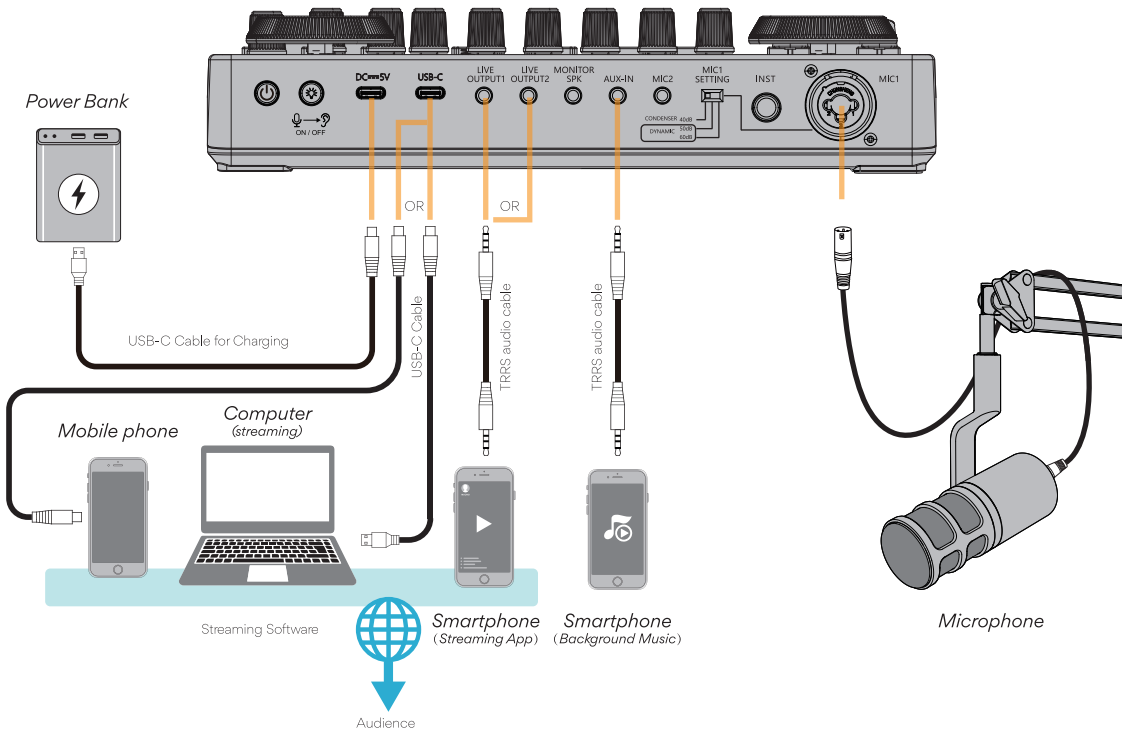

MUSIC RECORDING

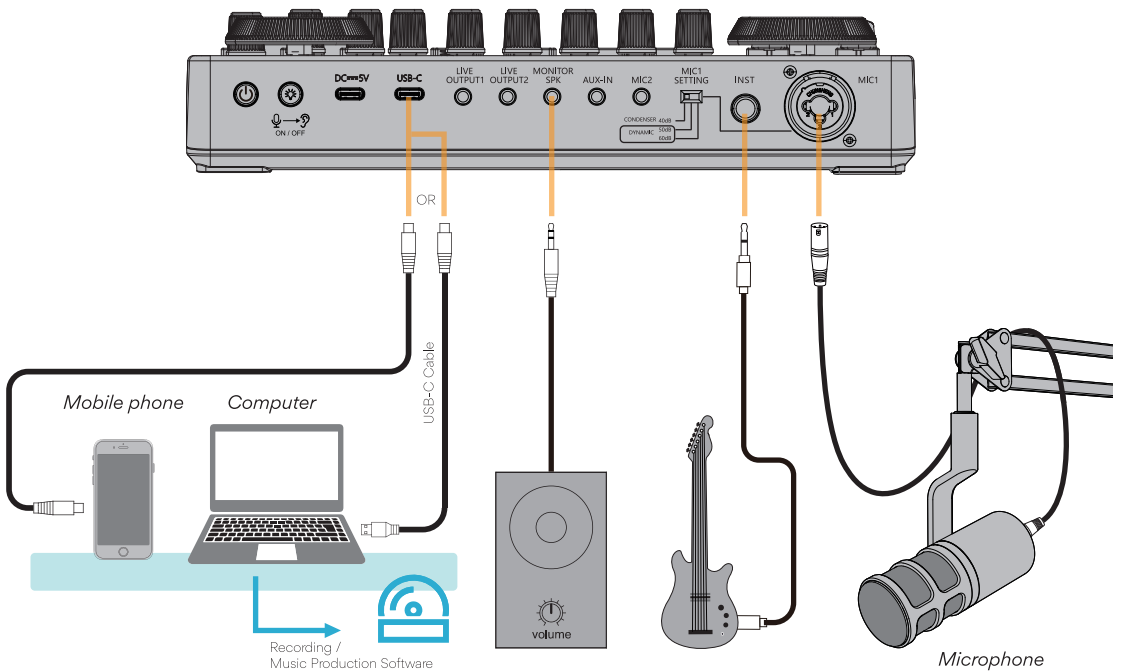

To get technical support, please scan the QR code of official site on the right, or click the link

support@maono.com

