



USER MANUAL
Studio Headphones

Specifications

Туре	Closed-back dynamic headphones
Frequency range	20 Hz-20 kHz
Impedance	32 ohms
Sensitivity	110 dB±3dB at 1mW
Maximum input power	100mW
Drivers diameter	50mm
Cord	3.0m (9.8) cable
Plug	3.5mm (1/8") stereo mini-jack
Adapter	6.35mm (1/4") stereo jack

 \bigstar Specifications and designs are subject to change without notice.

Warning

- Adjust the headphones to a comfortable listening level. At full power, prolonged listening with headphones can result in damage to the user's hearing.
- Never wear these headphones while driving, as their audio isolation would prevent you from hearing the sounds in your environment.
- Do not disassemble the headphones. Doing so will void the guarantee.
- Protect the headphones from shocks and impacts.
- Ear pads may deteriorate with extended use or long storage.

Note

- 1. Please retain this information. Colors and decorations may vary.
- This product contains small parts that could potentially be swallowed. We recommend that you remove the plastic fasteners and adhesive items before using the product.
- This product must not be used by a child under 12 years of age without an adult's supervision.


50mm drivers with high isolation earmuffs

AU-MH601 has a 50mm large built-in driver. It not only allows the headphone to reproduce the nuance of the original sound but also enrich the low frequency part, so that the users will never miss any detail of the sound. It is equipped with soft earmuffs, effectively enabling noise isolation from the surrounding and bringing premium listening experience to the users.




Adjustable and foldable headband


Users can easily adjust the length of the headband and make it a customized size for themselves. It can be adjusted horizontally 90 degrees and vertically 180 degrees. Besides, its headband could be folded to a smaller size thus portable for outing.







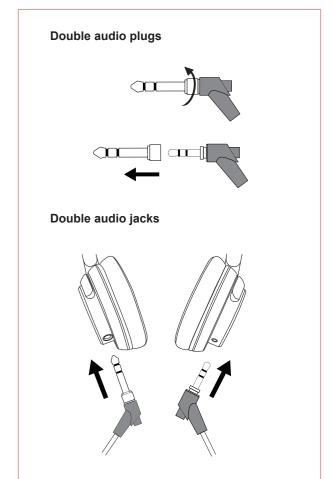


Model: AU-MH601

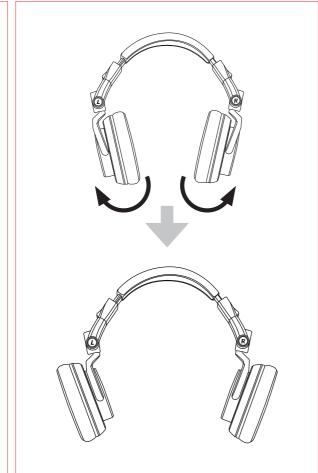

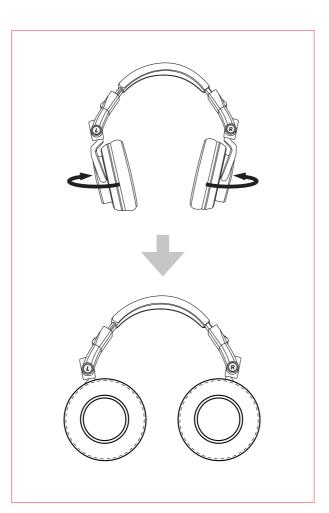

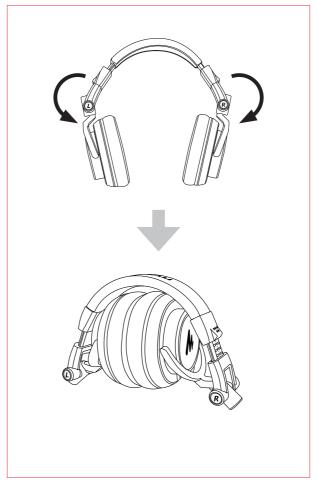

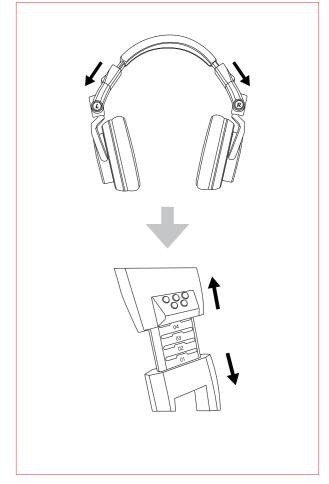

Technical support: support@maono.com www.maono.com

