Get to know your Urozetta.

Urozetta Cloud Pro/Cloud/Pro Mobile WiFi

About Urozetta Cloud Pro/Cloud/Pro Mobile WiFi

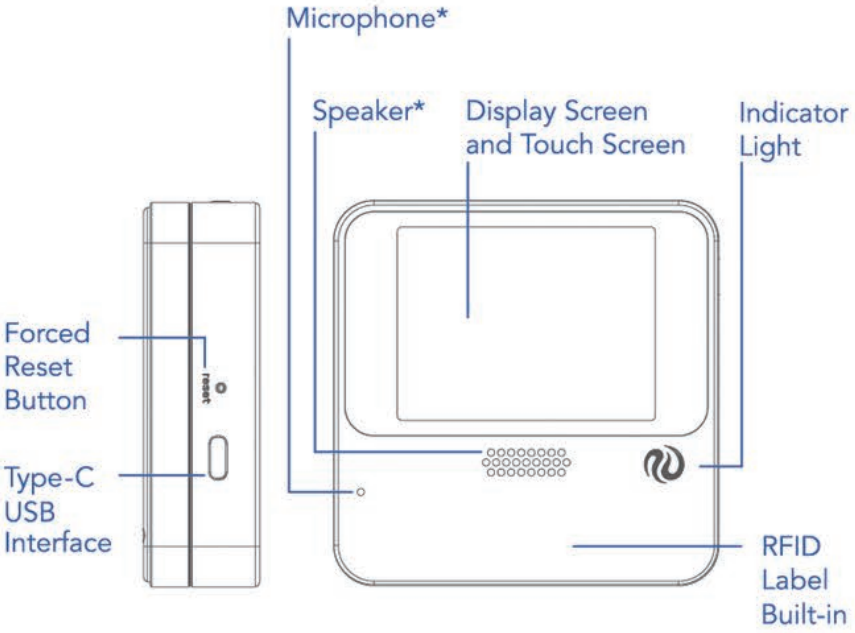



Remarks:
*Only for Urozetta
Cloud Pro and

Urozetta Pro

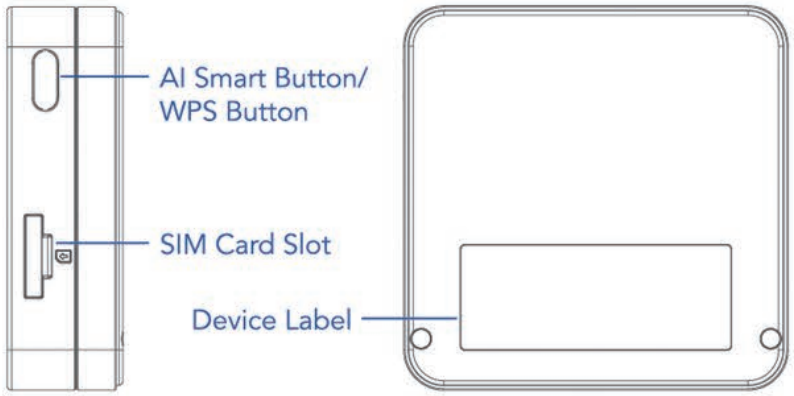

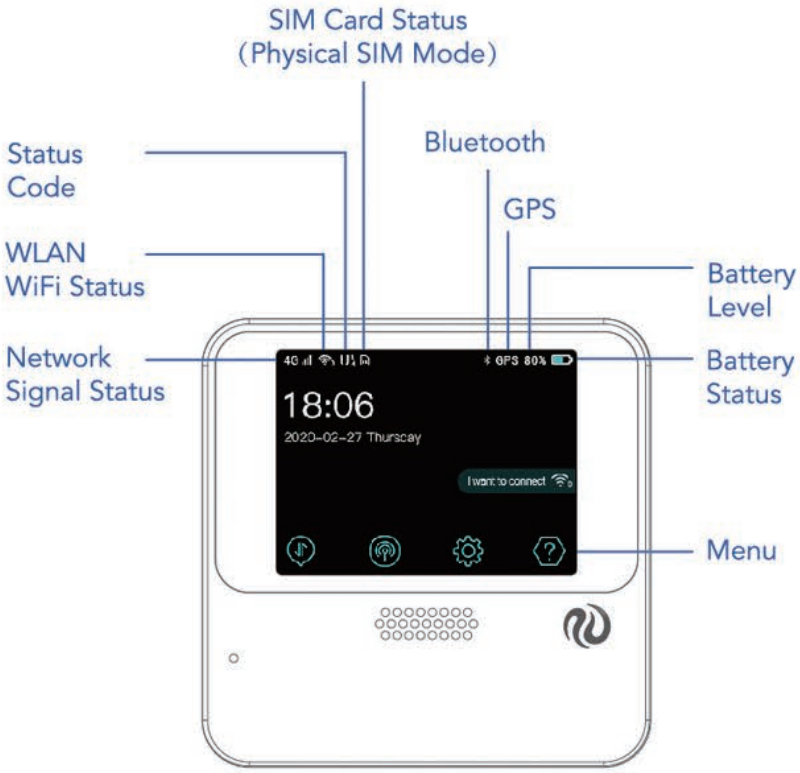

1. Buttons

Power Button
Long press the Power Button for more than 3 seconds to power on/off the device; Short press to turn the screen on or off.

AI Smart Button
Short press to turn on the screen. Short press again to turn on the AI (only for Urozetta Cloud Pro and Urozetta Pro)

WPS Button
For devices with WPS capability, turn on the WPS connection function then long press the Urozetta Cloud WPS Button for over 3 seconds. After the devices pair, complete the encryption authentication and connection between Urozetta Cloud and the wireless device. (Only for Urozetta Cloud)

○
reset

Forced Reset Button
Short press to force restart and restore to factory settings. Long press for more than 8 seconds to force power off. (Warning: Please do not press the Forced Reset Button without customer service support.)

Screen Lock

After 60 seconds without use， the device screen will lock. After 90 seconds without use，the screen will turn off. To lock and turn off the screen， just short press the power button.

Unlock Screen

Short press the power button to turn on and unlock the screen.

2. Indicator Light Description

	Power On Status	Power Off Status
Pulsing Red Light	Charging, Low Battery	Charging, Low Battery
Pulsing Yellow Light	Charging, Medium Battery	Charging, Medium Battery
Pulsing Green Light	Charging, High Battery	Charging, High Battery
Continuous Green Light	Charging Completed	Charging Completed
Flashing Red Light	Low Battery	
Flashing Blue Light	No network	
Continuous Blue Light	Normal network	

	System Status
Continuous Green Light	System Starting Up
Pulsing Yellow Light	Software Upgrade With System Start-up
Pulsing Red Light	System Shutdown

3. How to connect a device to your UROZETTA Wifi Network

1. WiFi Network Manual Connection
   (1) Find the SSID and KEY displayed on the bottom label of the UROZETTA WiFi device.
   (2) Enter the SSID and KEY found on the network connection of your phone or other device you want to connect to successfully connect to the network.
   Note: If the SSID and KEY displayed on the bottom label of the device are worn off and cannot be viewed clearly, you can start the UROZETTA WiFi device and view it in "Home"-> "Network"-> "WLAN".

2. Code Scan Connection (Camera Scanning / Wechat Scanning)
   (1) Start up your UROZETTA WiFi device and enter the homescreen.
   (2) Click the "I want to connect " button at the bottom right of the screen to enter the code scanning page.
   (3) Open your phone or other device's camera scanner or WeChat to scan the corresponding QR code.
   (4) After the scan is completed, your phone or other device will automatically connect to the network.
   Note: WeChat's scan code function can also be used to scan the Ucode QR code on the label on the back of the UROZETTA WiFi device.

3. NFC Touch Connection
   (1) Turn on the NFC function of your phone or other device you want to connect.
   (2) Hold your phone or other device to the front bottom area of the UROZETTA WiFi device.
   (3) After the connection prompt pops up on your phone or other device, click "Connect" to automatically connect.
   Note: This feature is only available on Android devices.

4. WPS One-click Connection
   (1) Turn on the "WPS" funtction in the settings of your phone or other device you want to connect.
   (2) Click the "I want to connect " button at the bottom right of UROZETTA WiFi device`s screen to enter the connection mode

selection page.

(3) Select "WPS connection" to enter the WPS network operation page, and click the " ⟲ " button to activate the WPS network function of UROZETTA WiFi device.

(4) Your phone or other device should automatically find the network. After the confirmation prompt pops up on your phone or other device, click "OK" to connect to the network.

Note: i) This feature is only available on Android devices.

ii) For Urozetta Cloud, you can press the "WPS" button on the right side of the UROZETTA WiFi device to activate the WPS connection function.

4. Use of SIM card slot

1. Urozetta Cloud Pro and Urozetta Cloud both support "Physical SIM " mode and "Virtual SIM "mode. You can change the setting by navigating to "Home"-> "Network "->" SIM Card Mode ". Urozetta Pro only supports" Physical SIM " mode.
2. In the" Physical SIM " mode, a SIM card must be inserted to use the UROZETTA WiFi device. Some SIM cards also need an APN to be setup, which should be setup on the WebUI or App. The external card slot does not support switching SIM cards when the UROZETTA WiFi device is on. If you need to use a SIM card, restart the UROZETTA WiFi device after inserting or extracting an external SIM card.
3. In the "Virtual SIM "mode, there is no need to insert a SIM card into the external card slot. You can purchase a data package through the UROCOMM App, and you can connect to a local network by turning on the UROZETTA WiFi device when you arrive at your destination.

5. Device Management

1. Scan the QR code below to download the Urocomm app. With the app you can easily buy data packages, manage your data, change passwords, set up your device, restart your device, and more.
2. Buying data packages and managing your data is only supported for Urozetta Cloud Pro and Urozetta Cloud.

Scan and Download

6. About WebUI —
Change your settings though your web browser

1. Connect to the WLAN WiFi network of your mobile phone or PC device using Urozetta Cloud Pro/Urozetta Cloud/Urozetta Pro.
2. Enter the address "urocomm.info" or "192.168.225.1" in the browser, the default password is: 12345678

3. After logging in, you can use the Web Page to change your password and set an APN, etc.

EU Regulatory Conformance

Hereby, Beijing ULINK Technology Co., Ltd. declares that this radio equipment type is in compliance with the Directive 2014/53/EU. For the full text of the EU declaration of conformity, visit this website: www.urocomm.com

Notice: The operating temperature of the device between -10°C to 35°C.

This product can be used across EU member states.

Technical features and characteristic for EU

WLAN	
Operation Frequency:	2412MHz~2472MHz 802.11b/802.11g/802.11n(H20) 2422MHz~2462MHz 802.11n(H40) 5180MHz ~ 5240MHz for 802.11a/802.11n(HT20)/802.11ac(VHT20); 5190MHz ~ 5230MHz for 802.11n(HT40)/802.11ac(VHT40)
Maximum Power (2.4GHz):	16.87dBm(E.I.R.P.)
Maximum Power (5.2GHz):	14.32dBm(E.I.R.P.)
5.8G SRD	
Operation Frequency:	5745MHz~5825MHz
Maximum Power:	13.91dBm(E.I.R.P.)
BT	
Operation Frequency:	2402~2480MHz
Maximum Power (BT:):	4.97dBm(E.I.R.P.)
Maximum Power (BLE:):	-1.12dBm(E.I.R.P.)

GSM	
Operation Frequency:	E-GSM 900 TX: 880~915MHz RX:925~960MHz DCS 1800 TX: 1710~1785MHz RX:1805~1880MHz
Maximum Power (E-GSM 900):	31.58dBm
Maximum Power (DCS 1800):	29.80dBm
WCDMA	
Operation Frequency:	Band 1 TX:1920MHz~1980MHz,RX:2110MHz~2170MHz Band 8 TX: 880MHz~915MHz,RX:925MHz~960MHz
Maximum Power (WCDMA Band 1):	22.6dBm
Maximum Power (WCDMA Band 8):	22.8dBm

FDD LTE	
Operation Frequency:	Band 1 TX:1920MHz~1980MHz,RX:2110MHz~2170MHz Band 3 TX:1710MHz~1785MHz,RX:1805MHz~1880MHz Band 7 TX:2500MHz~2570MHz,RX:2620MHz~2690MHz Band 8 TX:880MHz~915MHz,RX:925MHz~960MHz Band 20 TX:832MHz~862MHz,RX:791MHz~821MHz
Maximum Power (Band 1):	21.7dBm
Maximum Power (Band 3):	22.8dBm
Maximum Power (Band 7):	22.8dBm
Maximum Power (Band 8):	23.4dBm
Maximum Power (Band 20):	22.8dBm
TDD LTE	
Operation Frequency:	Band 38 TX:2570MHz~2620MHz,RX:2570MHz~2620MHz Band 40 TX:2300MHz~2400MHz,RX:2300MHz~2400MHz
Maximum Power (Band 38):	23.8dBm
Maximum Power (Band 40):	22.9dBm

Urozetta Cloud Pro/ Cloud/ Pro Mobile WiFi Specifications

Product Name	Urozetta Cloud Pro Mobile WiFi
Model No.	UZ-211-1
Size	86mm*86mm*26mm
Weight	191.4g
Bands	LTE-TDD: B38/B39/B40/B41
	LTE-FDD: B1/B2/B3/B4/B5/B7/B8/B11/B12/ B17/B18/B19/B20/B21
	WCDMA: B1/B2/B4/B5/B6/B8/B19
	GSM: B2/B3/B5/B8
WLAN	Support 2.4G & 5G
	IEEE 802.11a/b/g/n/ac
LCD Screen	2.8 inches
LCD Pixels	240 x 320 pixel
Touch Screen	Support
Battery Type	Lithium-ion 21700 battery
Cell Norminal Capacity	5000mAh
Cell Rated Capacity	4850mAh
USB Port	Input: Type-C 5V2A
	Output: Type-C 5V1A
Bluetooth	Support (This feature is coming soon)
AI	Alexa
Cloud MiFi	Support
Other functions	GPS, Power bank, Indicator Light, WPS, RFID Label, Interpreter
Working temperature	-10°C-35°C

FAQ

1. How to change the Wi-Fi name and password?
   First connect your mobile phone or PC device to your Mobile WiFi WLAN network, and enter"urocomm.info" or 192.168.225.1 in your browser, and enter the password 12345678 to open the administration interface. Here you can change your Wi-Fi name and password. After it has been changed, remember to save it.

   Alternatively, you can change the Wi-Fi name and password in the APP.

2. What should I do when my Phone/Tablet can not connect with the device?
    (1) Make sure the Phone/Tablet's WLAN is turned on.
    (2) Refresh the network list, and search for the SSID of the device.
    (3) Make sure to input the correct password.
    (4) Disconnect your device from your current network and then reconnect.

Warning

- Please only use original accessories provided with purchase. Use of unauthorized chargers or other accessories may cause damage to the device and can result in fire, explosions, or other hazards.
- If users of the UROZETTA WiFi device use a power adapter to charge the UROZETTA WiFi device, they should purchase a power adapter that meets the requirements of the corresponding safety standards or a power adapter that has obtained the quality and safety certification of the country in which it is used.
- Please keep the device in a dry and cool environment and do not let the device come into contact with water. Extreme high or low-temperatures may cause damage to the device.
- Please do not expose the device to high temperature environments or heating , such as strong sunlight, heaters, microwaves, ovens, or water-heaters etc. An overheated battery might cause explosion.

FCC Statement

- This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

— Reorient or relocate the receiving antenna.

— Increase the separation between the equipment and receiver.

— Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

— Consult the dealer or an experienced radio/TV technician for help.

FCC Radiation Exposure Statement

- This device complies with FCC SAR exposure limits set forth for an uncontrolled environment. SAR compliance for using the equipment in close proximity to the human body has been evaluated at 10mm. This equipment must not be co-located or operating in conjunction with any other antenna or transmitter. End-users and installers must be provide with antenna installation instructions and consider removing the no-collocation statement.

Caution!

- Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
- This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:
  (1) This device may not cause harmful interference, and
  (2) This device must accept any interference received, including interference that may cause undesired operation.
- This device is restricted to indoor use when operating in the 5150-5250MHz frequency range in all EU/EFTA member states and Turkey.

  Countries:
  (BE/BG/CZ/DK/DE/EE/IE/EL/ES/CY/LV/LT/LU/HU/MT/FR/HR/IT/NL/AT/PL/PT/RO/SI/SK/FI/SE/UK/TR/NO/CH/IS/LI)

RF EXPOSURE INFORMATION (SAR)

- This device meets the government's requirements for exposure to radiowaves.
  — The SAR limit set by the CE is 2.0W/kg
- The highest reported SAR values under the CE regulatory for your device are listed below:
  — Body SAR: 1.051W/kg

Contact

Service Email: service@urocomm.com

Copyright Notice

Beijing Ulink Technology Co., Ltd. reserve the final interpretation of the UROZETTA trademarks for this product.

For More Surprises: Please visit www.urocomm.com

UROCOMM

UROCOMM APP