


# INSTALLATION INSTRUCTIONS

## Dual USB Charger with 15A Duplex Tamper Resistant Receptacle

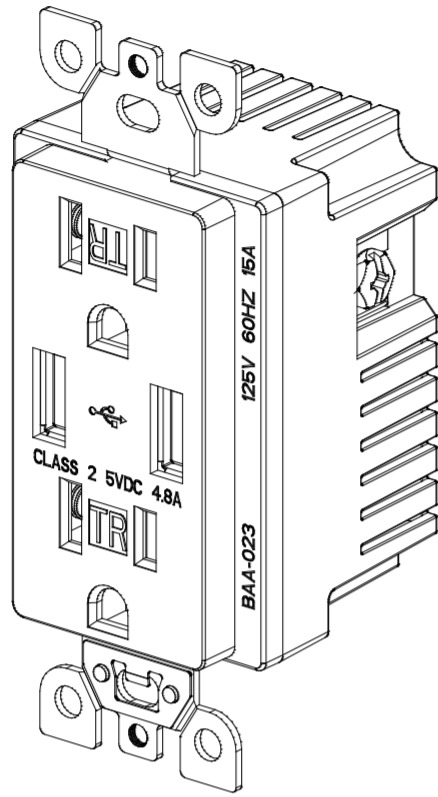

### ◆ SPECIFICATION

Receptacle Rating ..... 15 Amp, 125VAC  
 USB Rating ..... Two USB ports with total 4.8 Amp, 5VDC  
 Wire Terminals ..... #14 - #12 AWG  
 Operating Temperature ..... -4 to 140°F (-20 to 60°C)  
 USB Compatibility ... USB 1.1/2.0/3.0 devices, including Apple products  
 Strip Length ..... 0.5 inch (back wire holes), 1 inch (screw terminal)

### ◆ FEATURES

- Two USB ports with a super high current power of 4.8 Amp, 5VDC
- Charge most compatible electrical devices directly without an adapter
- Tamper-Resistant Shutters provide compliance with 2011 NEC Code
- Replaces a standard duplex receptacle
- Back and side wire for easy installation
- UL listed

### ◆ DESCRIPTION

The USB Charger/Tamper-Resistant Receptacle offers two USB charging ports and duplex Tamper-Resistant Receptacle.

This receptacle is able to charge any current electronic devices simultaneously, including smart phones, tablets, e-readers, cameras and MP3 players. What's more, it has the capability to charge new devices requiring higher current rating in the future. All you will need is a USB cable to connect to one of the two USB ports.

### ◆ APPLICATION


- |                   |                |
|-------------------|----------------|
| ■ Cafes           | ■ Labs         |
| ■ Office          | ■ Hospital     |
| ■ Kitchens        | ■ Salons       |
| ■ Bedrooms        | ■ Hotels       |
| ■ Restaurants     | ■ Schools      |
| ■ Meeting Rooms   | ■ Libraries    |
| ■ Airport Lounges | ■ Workstations |

### ◆ COMPATIBILITY

The convenient USB receptacle is compatible with a wide range of electronic devices including, but not limited to the following:

- |                              |                                |
|------------------------------|--------------------------------|
| -iPad®                       | -iPhone®                       |
| -iPad® Mini                  | -iPod®                         |
| -Tablets                     | -GPS                           |
| -Mobile Phones               | -Galaxy Tab™                   |
| -Blackberry®, Android Phones | -Bluetooth™ Headsets           |
| -Window® Phone by HTC        | -Digital Cameras               |
| -Kindle™, Nook e-reader      | -Other USB Compatible Products |

If the devices combined power requirements exceed the power capacity of the USB Ports, the charger will automatically shut down to protect your devices.

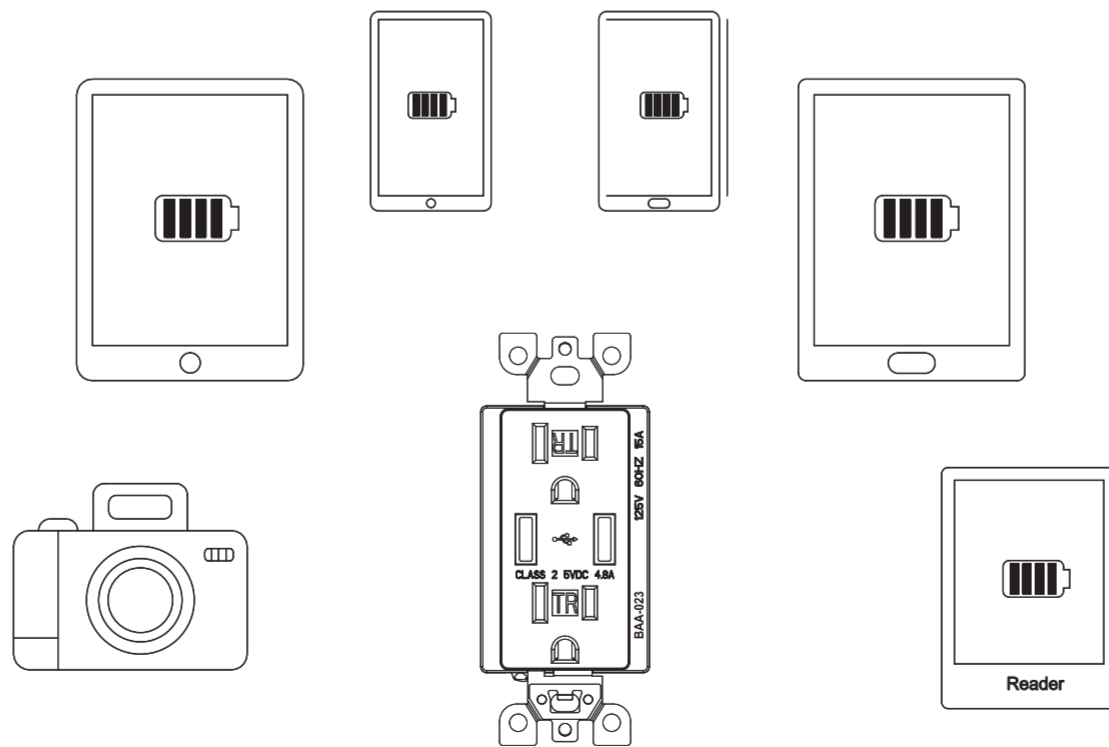

**Charges most USB powered devices**

### ◆ INSTALLATION


**WARNING:** To avoid fire, shock, or death, turn off power at circuit breaker or fuse and test that power is off before wiring.

To be installed and/or used in accordance with appropriate electrical codes and regulations.

If you are unsure about the installation, please consult a qualified electrician.

1. For retrofit applications, remove wall plate and mounting screws.
2. Carefully remove the existing receptacle from the box.
3. Disconnect the wiring from the old receptacle.
4. Connect the receptacle per wiring diagram: black lead to hot terminal, white lead to neutral terminal, green or bare copper lead to ground terminal.
5. Tighten every screw and no bare conductors are exposed, 12-14 pound inch (1.3-1.6Nm) of torque.
6. Insert the receptacle in wall box with screws provided and mount wall plate.
7. Restore power at circuit breaker, installation is complete.

### Wiring Diagram

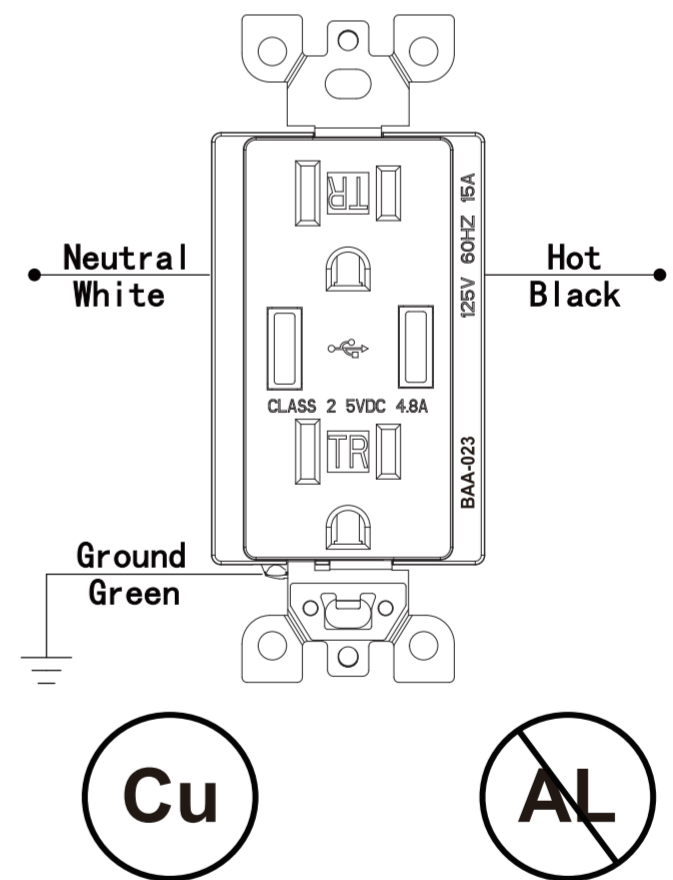

### ◆ WARRANTY INFORMATION

Our company warranties this product to be free of defects in materials and workmanship for a period of two (2) years. There are no obligations or liabilities on the part of our company for consequential damages arising out of, or in connection with, the use or performance of this product or other indirect damages with respect to loss of property, revenue, or profit, or cost of removal, installation or reinstallation.