



## Bondi Slim Body Batten

A stylish blade fitting with a low profile. With a tricolour switch and high lumen efficacy of 110lm/W it is ideal for commercial applications. Also suited for residential garages, utility rooms, and storerooms. Available in 600mm, 900mm, or 1200mm.




### Specifications

Wattage:	20W/30W/35W
Beam Angle:	120°
Dimensions 20W:	L600xW80xH34mm
30W:	L900xW80xH34mm
35W:	L1200xW80xH34mm
Driver:	Constant current LED driver, non-dimmable
Power Factor:	>0.9
Input Voltage:	240V 50/60Hz
Electrical Classification:	Class I
IP Rating:	IP20
Mounting:	Surface mounted
Material:	Extrusion aluminum body PC end caps, opal PC diffuser
Colour:	Powder coated white finish
Warranty:	5 years residential 3 years commercial



### Dimensions

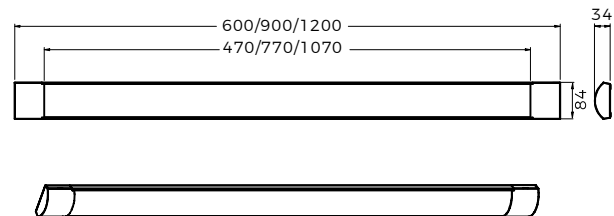

### LED Information

LED Chip Type:	SMD LED chips
CCT:	3000K/4000K/5700K
Lumen 20W:	1950/2250/2200 lm
30W:	2990/3450/3300 lm
35W:	3330/3810/3580 lm
Efficiency	>110 lm/W
CRI Rating:	>80
Life Span:	50,000Hrs

### Model Comparison

Model No.	Power (W)	CCT (K)	Lumen (lm)	Size (LxWxH) mm)
BDSL-600 -20W-TC-WH	20	3000	1950	600x80x34
		4000	2250	
		5700	2200	
BDSL-900 -30W-TC-WH	30	3000	2990	900x80x34
		4000	3450	
		5700	3300	
BDSL-1200 -35W-TC-WH	35	3000	3330	1200x80x34
		4000	3810	
		5700	3580	