

1. Product Name

- TFT LCD display; model: UKC3.


2. Suppliers

3. Electrical Parameters

- ✧ 1.77 inch IPS screen
- ✧ 24V/36V/48/52V battery supply
- ✧ Rated power of instrument :1W
- ✧ Off leakage current <1uA
- ✧ Working current supplied to controller:100mA, Max output current to controller: 300mA
- ✧ Operating temperature: -20~70°C
- ✧ Storage temperature: -30~80°C

4. Dimensions & Material

- ✧ ABS product shell, LCD transparent window is made of high strength Acrylic which is imported, Product holder material is glass fiber mixed with nylon.

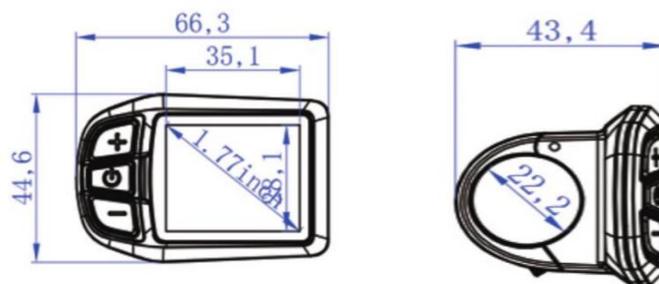

5. Features

5.1 High-contrast 1.77 inch IPS colorful matrix screen.

5.2 **Speed display:** Display real time speed.

5.3 **Kilometer/Mile:** Can be set according to customers' habits.

5.4 **Intelligent power indicator contains below:** It can provide a stable power indication through the optimization algorithm. The power is not affected by the start-stop fluctuation of the motor. If the system supports battery communication, the accurate percentage of power will be displayed.

5.5 **Adjusting 5 levels backlight brightness:** 1st level is the darkest, 5st is the lightest

5.6 **5-level Assist:** 5-level.

5.7 **Mileage indicator:** Odometer/Trip distance/Riding time.

5.8 **Error code indicator.**


5.9 **Software upgraded:** Software can be upgraded through UART.

5.10 **Speed measuring magnetic steel regulating function:** The number of speed measuring magnetic steel can be set.

5.11 **Speed limited from 1-100Km/h.**

5.12 **Current limited from 5-30A (no use for our controller).**

6. TFT screen instructions

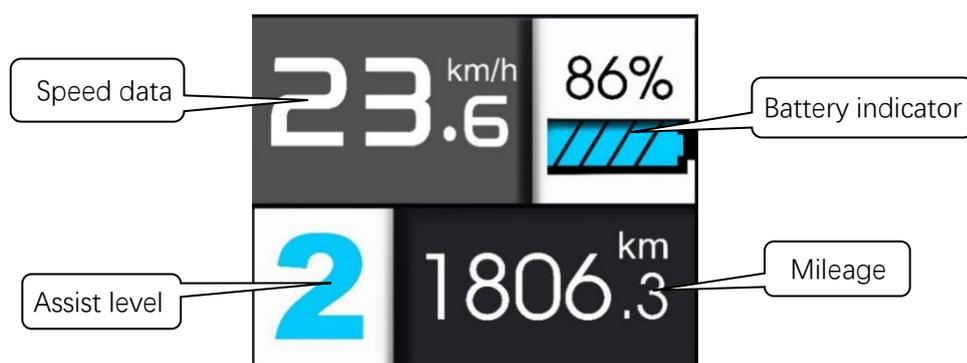

- 6.1 Speed display: Km/h or MPH.
- 6.2 Battery display: Voltage data and display model is optional.
- 6.3 Level display: 0-5Levels, P means 6Km/h.
- 6.4 Mileage display: Display mileage accumulation.

7. Functional Description



7.1 Power On/Off

Press and hold **Power** button for 1 second, it can turn on/off the display. The Display will automatically shut down when there is no operate & ride for X minutes (X could be 0~9).

***If the display has been set power-on password, you need to input the right password when starting.**

7.2 Assist level operating

Short press UP/DOWN button can change the assist level. Top assist level is 5,0 for neutral. Level quantities can be adjusted according to the customer's requirements.



The screen display of the PAS level adjust

7.3 Headlight/Display model change

Press and hold UP button for 1 second, the background light will be opened and change the daytime/night model. Press and hold UP button for 1 second again, lighting will be closed and change the display model.



Daytime model



Night model

7.4 Walking mode (6km)

Pressing and holding DOWN button for 2 seconds can get into walking mode, then the display will show P, when release the button, it will be out of the mode.



The display of the walking mode

***This feature needs to be supported by controller.**

7.5 Information

Press **Power** button for 1 second can get into information menu, it will show Odometer/Trip distance, and Riding time.



Information menu

8. MENU Parameter setting

In the state of power on, press the **Power** button twice (time interval must be within 0.3S), the system will enter the menu parameter setting state, in this state, users can set the parameters, press **Power** button twice again to quit setting state (time interval must be within 0.3S).

*Display will quit the menu automatically when there is no operation for 30 seconds, In the riding state (speed is more than 0), entering setting state is not allowed, when riding in the menu state (speed is not 0), it will quit menu setting state.in the advanced setup interface, when you press **Power** switch, it's not able to quit menu.

8.1 Brightness

Press **Power** button to enter the setting menu, adjusting the brightness 1-5 by pressing UP/DOWN button, 1 is the darkness, 5 is the brightness.



Adjusting the brightness interface

8.2 System


Press UP/DOWN button can change different function, entry into default by pressing **Power** Button, press UP/DOWN button again will change content, pressing **Power** button returns to previous menu.

Default and functions:

Unit system → Metric/Imperial
 Power system → 24V/36V/48V/UBE(52V)
 Power indicate → Percent/Voltage
 Auto assist → ON/OFF
 After finish setting, choose EXIT, returns to previous menu.

8.3 Auto off 

Press UP/DOWN button to change the auto power off time, from 1 to 9, the number represent time (minutes) to shut down, default value is 5 minutes.

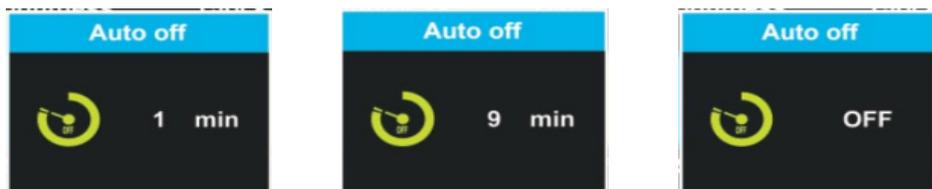

8.4 Wheel 

Press UP/DOWN can change the wheel setting, optional wheel diameter is 10/12/14/16/18/19/20/22/23/24/26/27/27.5/28/29/30/31 inch, 51cm~255cm represent wheel circumference (this needs protocol support).



8.5 Advance setting 

Press **Power** button to enter advance setting menu, adjusting password by pressing UP/DOWN button, if the password is right, you can enter the Sub menu of advance setting, password has 4 numbers, default password is '**1801**'.

Defaults and functions:

Speed limit → **km/h

Current limit → **A

Assist levels → 5: 5 means 5 levels;

Poles in motor → 1~99

Throttle 6km → Y/N

Drive Mode → Throttle, Assist, Both

Assist Poles → 3~15

After finish setting, choose Exit, Previous Menu.

8.6 Factory setting 

Enter Factory setting menu, set YES will restore all parameter to factory settings.



8.7 Password


Press **Power** button to enter the password setting menu. Press UP/DOWN button to adjust the password number and get into setting menu, choose Start Password and choose Turn ON/Turn OFF, it means open/close password; choose Reset the Password menu, it will get into the new password setting menu. default password is '0000'.



Input password



Choose




Input new password

8.8 Exit

Select Exit and press **Power** to return to the main menu.

9. Error Code define

UKC3 can provide error indication for vehicle default, and display error code and error description on screen when fault is detected.



Errors Code:

02H: Braking Status. Means it is in Braking function. It is not Error.

20H: Throttle's Problem.

10H: Controller's Problem.

08H: Low Voltage Status. Please check power system Voltage's setting

Unit system → Metric/Imperial

Power system → 24V/36V/48V/52V

Power indicate → Percent/Voltage

Auto assist → ON/OFF


01H: Motor's Problem. Please check the connector is in good condition connection.

10. Assembly instructions

Please pay attention to the screw's torque value, damages caused by excessive torque are not within the scope of the warranty.



11. Connect descriptions

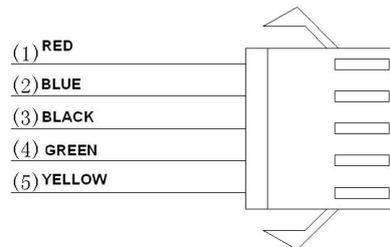

- 1、 Red wire: Anode (24V/36V/48V)
- 2、 Blue wire: Power cord to the controller
- 3、 Black wire: GND
- 4、 Green wire: RXD (controller->display)
- 5、 Yellow wire: TXD (display->controller)