

# INSTRUCTION MANUAL

## LED Shop Light

### SAFETY INFORMATION

**IMPORTANT:** Read all safety precautions and installation instructions carefully before installing

- ◆ Do not install the fixture with power on, also do not operate by wet hands.
- ◆ Ensure the fixture is mounted onto a good structurally surface that will support the fixture.
- ◆ The fixture is designed for use in 120VAC, 60Hz.
- ◆ Product can be used in shops, supermarkets, Hospitals, airports, office buildings, government buildings etc.
- ◆ Do not install on radiant-heating type ceiling.


**WARNING: IF NOT FOLLOW THESE INSTRUCTION MAY LEAD TO A POTENTIALLY FATAL ELECTRICAL SHOCK OR PROPERTY DAMAGE**

### PRE-INSTALLATION


#### HARDWARE INCLUDED




AA: large Pointed Pin Cross Wood Screws\*4PCS




BB: Wall Anchors\*4PCS




CC: Wire Nut\*3PCS



DD: mounting bracket\*1PC



EE: Telescopic screw\*2PCS



FF: screw\*2PCS




GG: 5.9 inch Lifting rope\*1PC


"O" HOOKS

### INSTALLATION (Flush Mounting)


1. One hand against the bottom of the PC cover, after tilting the lamp at 45 angle, remove the PC cover, as shown in the figure.

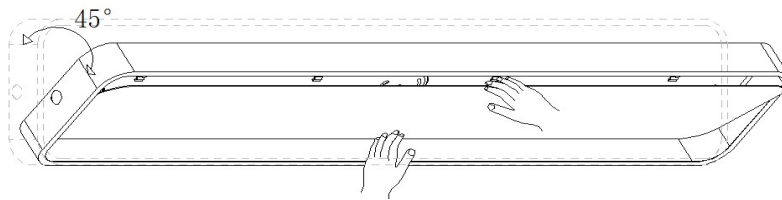


2. Identify threaded holes in universal mounting bracket (DD) by aligning with mounting keyholes in fixture pan. Attach fixture mounting screws (EE)(FF) ① into threaded holes and leave extended about 3/8 in. Attach mounting bracket to electrical box, using existing electrical box screws ②.

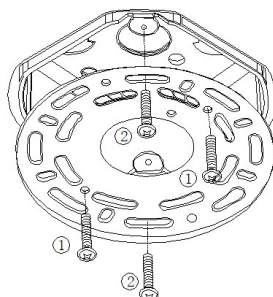


3. Pull fixture wires through hole near center of fixture pan to backside of fixture. Using support chain (FF), connect one end to back of fixture pan near center in specially designed slots. Hook other end of support chain to electrical box to temporarily hold fixture for wiring.

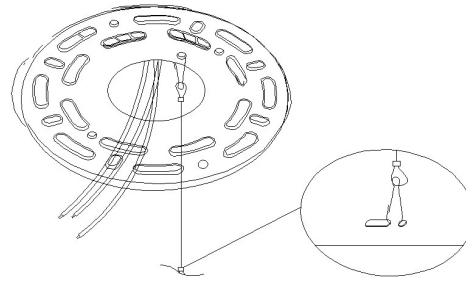


4. Connect AC wire, Push excess wire into electrical box.

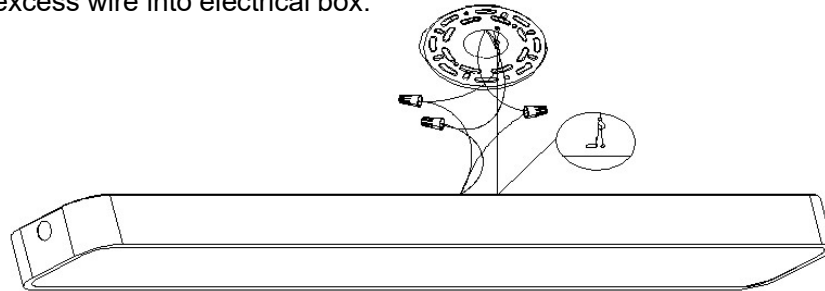


5. Remove the auxiliary rope. Insert first screwhead into straight keyhole slot ①, pivot fixture and insert second screw into curved keyhole slot ②. Once screws are engaged, maneuver fixture into desired position. Tighten screws.

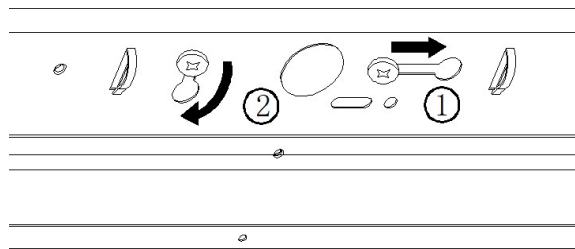

Note: If the fixed shell of junction box is not strong enough, the expansion screw can be used for reinforcement. Insert the expansion screw rubber plug (BB) into the holes and secure the shell with self-tapping screw (AA).

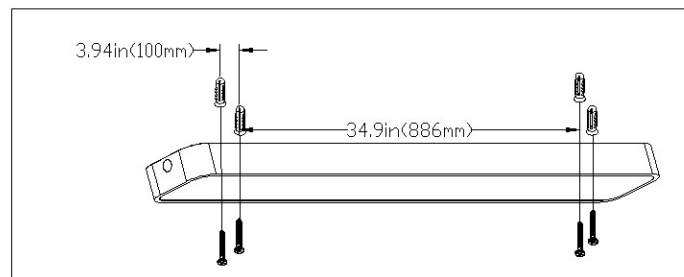

6. Installing the PC cover and adjust the position of the PC cover to make it smooth. Installation completed.

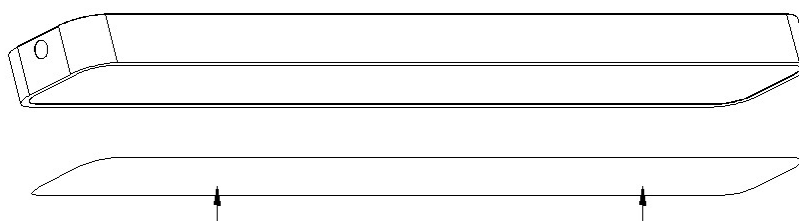

## Guarantee

If your product does not arrive in good condition or does not work great 100% Satisfaction Guarantee within 3 years, please let us know we will give you replacement or refund. Customer service: [Lightdot.cs@hotmail.com](mailto:Lightdot.cs@hotmail.com)