


YUNZII

YZ84 PRO

GASKET TRI-MODE WIRELESS MECHANICAL KEYBOARD

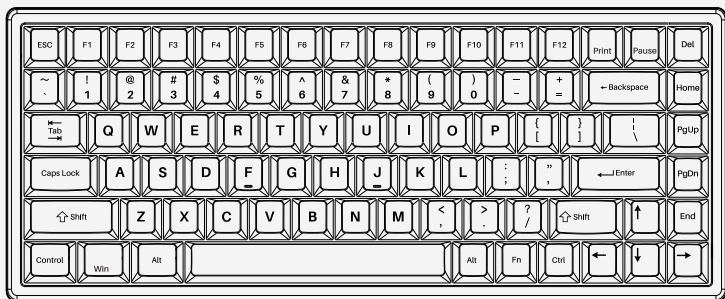

User Manual

マニュアル

用户手册



DECORO



OFFICIAL STORE



INSTAGRAM

For any support: support@yunzii.com

website: www.yunzii.com

使用指南

型号： YZ84 Pro三模版
尺寸： ≈350mm×130mm×30mm
热插拔： 全键轴座热插拔
系统： Windows/Mac/Linux/
Android/iOS
电池： 5000mAh

供电： Type-C 5V-1A
重量： 1000g±20g
配列： 84键
键帽： PBT键帽
灯光： RGB贴片灯

WIN 快捷键

FN +	功能
FN + Esc (3s)	恢复出厂设置
FN + Win	WIN锁定
FN + Del	Ins
FN + BACK	省电模式
FN + P	键盘锁
FN + F1	屏幕亮度-
FN + F2	屏幕亮度+
FN + F3	任务切换
FN + F4	快速访问
FN + F5	邮件
FN + F6	我的电脑
FN + F7	上一曲
FN + F8	播放 / 暂停
FN + F9	下一曲
FN + F10	静音
FN + F11	音量-

Mac 快捷键 (系统自动识别)

FN +	功能
FN + Esc (3s)	恢复出厂设置
FN + BACK	省电模式
FN + Del	Ins
FN + P	键盘锁
FN + F1	屏幕亮度-
FN + F2	屏幕亮度+
FN + F3	截图
FN + F4	任务控制
FN + F5	静音
FN + F6	音量-
FN + F7	音量+
FN + F8	上一曲
FN + F9	播放 / 暂停
FN + F10	下一曲
FN + F11	搜索

键盘驱动

下载方式:

- 1.打开yunzii官网，找到与型号对应的驱动
- 2.解压已下载的驱动包，点击exe文件安装。
- 3.安装完成后，使用有线模式连接电脑，驱动程序会自动识别键盘。
- 4.连接完成，开始使用驱动。

驱动下载与安装

下载网址: www.yunzii.com

适配系统: Windows



邮 箱: support@yunzii.com

驱动更新

打开驱动程序，点击右上角更新驱动，即可获取最新版本的驱动。

更换键帽和轴

拆换工具

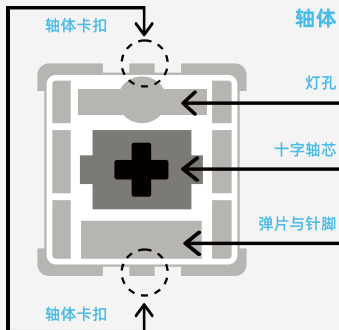

取下键帽

- 1.使用拔键器以垂直角度对准键帽上方
- 2.将拔键器下推至金属钩打开，旋转拔键器从键帽下方抓牢键帽的对角
- 3.按住键盘，垂直方向用力取下键帽

取下轴体

- 1.使用拔轴器对准轴体的卡扣（如图所示）
- 2.捏住轴体卡扣垂，使卡扣与键盘定位板分离
- 3.使用温和且恒定的力度，垂直将轴体取下
- 4.取下单个轴体时，请先移出轴体轴位所有键帽，以免损伤周边键帽

安装键帽

- 1.确认键帽方向正确，对准十字轴芯
- 2.将键帽垂直推到轴上

安装轴体

- 1.检查轴体针脚是否笔直且干净，切忌使用有焊接痕迹的轴体
- 2.将针脚与键盘PCB板上的轴座对齐
- 3.垂直按下轴体，使轴体固定到定位板上
- 4.检查轴体是否触发正常



如果轴体无法正常触发，可能是因为轴体针脚弯折，请将轴体取下，更换轴体或修复针脚后重新安装。更换键帽和轴体切忌使用蛮力，以免造成轴座损坏。

如您遇到拆卸和安装困难，请联系客服人员，以免因操作错误损坏键盘。

QUICK START GUIDE

MODEL : YZ84 Pro Wireless
SIZE : ≈350mm×130mm×30mm
HOTSWAP : YES
SYSTEM : Windows/Mac/Linux/
Android/iOS
BATTERY : 5000mAh

CONNECT : 2.4GHZ Wireless/Bluetooth/
Wired connection
WEIGHT : 1000±20g
LAYOUT : 84 KEYS
KEYCAPS : PBT
LIGHT : RGB
PCB : North Facing RGB

FUNCTION



FN +	FUNCTION
FN + Esc (5s)	Reset
FN + Win	Win Lock
FN + Del	Ins
FN + Back	Battery Saving Mode
FN + P	Keyboard Lock
FN + F1	Screen Brightness-
FN + F2	Screen Brightness+
FN + F3	Task switch
FN + F4	Quick access
FN + F5	E-mail
FN + F6	My computer
FN + F7	Previous song
FN + F8	Play / Pause
FN + F9	Next song
FN + F10	Mute
FN + F11	Volume-
FN + F12	Volume+

FUNCTION KEY



FN +	FUNCTION
FN + Esc (5s)	Reset
FN + Del	Ins
FN + Back	Battery Saving Mode
FN + P	Keyboard lock
FN + F1	Screen Brightness-
FN + F2	Screen Brightness+
FN + F3	Screenshot
FN + F4	Mission control
FN + F5	Mute
FN + F6	Volume-
FN + F7	Volume+
FN + F8	Previous song
FN + F9	Play / Pause
FN + F10	Next song
FN + F11	Search
FN + F12	Home page

CONNECTIONS AND RGB GUIDE

CONNECTION MODE

FN +	FUNCTION
FN + 1	BT1
FN + 2	BT2
FN + 3	BT3
FN + 4	2.4G
FN + 5	Wired

CONNECTION STEPS

2.4G pairing

1. **FN+ 4** until the pairing indicator flashes quickly to enter the 2.4G pairing mode
2. Insert the 2.4G receiver and place the keyboard as close to the 2.4G receiver as possible
3. After the code matching is successful, exit the code matching, the mode light is always on for 5s
4. If the code matching device is not found successfully, the indicator light turns off and goes to sleep after 60s, please perform the code matching operation again.

Bluetooth pairing

1. After the keyboard is turned on, press and hold **Fn+1/2/3** until the indicator light flashes quickly to enter pairing mode
2. Find the YZ84 Pro on the bluetooth receiving device and paired with it. After the pairing is completed, the indicator light will always on for 5s
3. If the pairing fails, the keyboard indicator turns off and goes to sleep, please re-pair

Switch the connected device

1. Short press **Fn+1/2/3/4/5** to switch the device connection mode
2. The indicator light flashes slowly during the connection process of the device, and the indicator light stays on for 2s after the connection is successful
3. If the connection fails, the indicator light turn off and the keyboard sleeps

Battery

When the battery is lower than 5%, the red light flashes slowly (the backlight is turned off)
When charging, the yellow light is always on
Charging is complete, the green light is always on

Power Query

When the backlight is turned on, press the key combination **Fn+Space**, the backlight will turn off, and the number keys 1 to 0 will light up to display the power ratio. Example 1-5 light means 50%

Power save mode

When wirelessly connected (**Bluetooth/2.4G**), turn off the backlight without any operation for 5 minutes, and enter into deep sleep without operation for 30 minutes

RGB SETTINGS

FN +	FUNCTION
FN + Back	RGB Light On/Off
FN + PAUSE	Change Back Light Effect
FN + Home	Change Back Light Color
FN + PgUp	Light Effect Direction
FN + ←→	Back Light Speed
FN + ↑↓	Back Light Brightness
FN + Right CTRL	Change Side Light Effect
FN + Right ALT	Change Side Light Color
FN + []	Side Light Brightness
FN + ; ''	Side Light Speed V

Website : www.yunzii.com

Email: support@yunzii.com

KEYBOARD SOFTWARE

Download method:

1. Open the official website of www.yunzii.com , click on the software.
2. Unzip the downloaded software package and click the exe file to install.
3. After the installation is complete, use the wired mode to connect to the computer, and the software will automatically recognize the keyboard.
4. After the connection is completed, start using the software.

Software Download : www.yunzii.com

System Support: Windows


Email: support@yunzii.com

Driver update


Open the software and click Update software in the lower right corner to get the latest version of the software.

REPLACE KEYCAPS AND SWITCH

Included Tools



Mechanical Switch

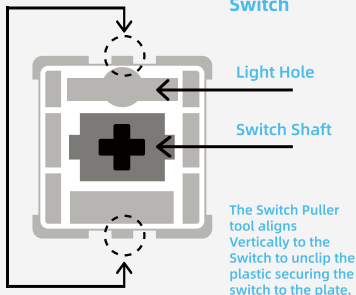

Remove Keycaps

1. Grab your Keycap Puller Tool and place it above the keycap you want to remove at a 90 degree angle.
2. Push your Keycap Puller down until the metal hooks to open themselves and grab the keycap from underneath.
3. Grab your Keyboard firmly and pull the keycap in a vertical motion.

Install Keycaps

1. Make sure the Keycap is properly oriented in your keyboard and place it above the switch.
2. Push the keycap into the switch shaft firmly.

Install Switches

1. Check that all the switch metallic pins are perfectly straight and clean.
2. Align the switch lamp hole with the backlight, The pins align themselves to the keyboard PCB.
3. Press the switch down until you hear a click. This means your switch clips have attached themselves to the keyboard plate.
4. Inspect the switch to ensure it's properly attached to your keyboard, and test it.

Remove Switches

1. Grab your Switch Removal Tool and align the gripping teeth vertically (on the Y-Axis) at the center of the switch, as shown in the example graphic above.
2. Grab the switch with the Switch Puller and apply pressure until the switch releases itself from the plate.
3. Using firm but gentle force pull the switch away from the keyboard using a vertical motion.



Note: if the key doesn't work, you may have bent one of the switches while installing it. Pull the switch out and repeat the process. Pins may be damaged beyond repair and need replacement if this process is not done correctly. Never apply excessive force when replacing keycaps or switches. If you cannot remove or install keycaps or switches please contact customer service as soon as possible to avoid damage to the keyboard due to operating errors.

マニュアル

モデル:	YZ84 Pro ワイヤレス
サイズ:	≈350mm×130mm×30mm
ホットスワップ:	YES
システム:	Windows/Mac/Linux/ Android/iOS
バッテリー:	5000mAh

接続:	2.4GHZ無線/Bluetooth/有線接続
重さ:	1000g±20g
レイアウト:	84キー
キーキャップ:	PBT
ライト:	RGB
PCB:	北向きPCB

ファンクションキー

FN +	ファンクション
FN + Esc (5 秒)	リセット
FN + Win	Win ロック
FN + Del	Ins
FN + Back	省電力モード
FN + P	キーボードロック
FN + F1	画面の明るさ-
FN + F2	画面の明るさ+
FN + F3	タスクスイッチ
FN + F4	クイックアクセス
FN + F5	メール
FN + F6	マイコンピュータ
FN + F7	前の曲
FN + F8	再生/一時停止
FN + F9	次の曲
FN + F10	ミュート
FN + F11	ボリューム-
FN + F12	ボリューム+

ファンクションキー

FN +	ファンクション
FN + Esc (3s)	リセット
FN + Del	Ins
FN + Back	省電力モード
FN + P	キーボードロック
FN + F1	画面の明るさ-
FN + F2	画面の明るさ+
FN + F3	スクリーンショット
FN + F4	タスクコントロール
FN + F5	ミュート
FN + F6	ボリューム-
FN + F7	ボリューム+
FN + F8	前の曲
FN + F9	再生/一時停止
FN + F10	次の曲
FN + F11	検索
FN + F12	ホームページ

接続 & インストールガイド

接続モード

FN + ファンクション

FN + 1 BT1

FN + 2 BT2

FN + 3 BT3

FN + 4 2.4G

FN + 5 有線

接続手順

2.4Gペアリング

1. **FN+4**を長押しして、インジケータが点滅して2.4G ペアリングモードに入ります。
2. 2.4G レシーバーを挿入し、キーボードを2.4G レシーバーのできるだけ近くに配置します。
3. コードマッチングが成功したら、コードマッチングを終了して、モードライトが常に5 秒間点灯します。
4. ペアリングデバイスが見つからない場合は、インジケータライトが60秒後消灯し、スリープ状態になりますので、再度ペアリングしてください。

Bluetooth ペアリング

1. キーボードの電源を入れた後、インジケータが点滅するまで **Fn+1/2/3/4/5** を押し続けます。キーボードはペアリングモードに入ります。
2. Bluetooth で YZ75 を見つけて、受信デバイスとペアリングしてください。ペアリング完了すると、インジケータライトは常に5 秒間点灯します。

接続されたデバイスを切り替える 方法

1. **Fn+1/2/3/4/5** を短く押すと、デバイス接続モードを切り替えます。
2. 動作中はインジケータライトがゆっくりと点滅します。接続成功すると、インジケータライトは2秒間点灯します。
3. 接続に失敗すると、インジケータライトが消え、キーボードがスリープモードになります。

バッテリーのヒント

バッテリーのヒント
バッテリー残量が5%未満になると、赤ゆっくり点滅します。(バックライト消灯)、充電中は常に黄色のライトが点灯します。充電完了、緑色のライトが常に点灯します。

パワーケェリ

バックライト点灯時に**Fn+Space**キーを押すと、バックライトがオンになります。数字キーの1~0が点灯し、電力比を表示します。例: 1-5点灯すると、バッテリー残量が50%であることを意味します。

パワーセーブモード

無線接続時 (Bluetooth/2.4G)、5分間無操作でバックライト消灯、30分間無操作でディープスリープに入る

RGB設定

FN + ファンクション

FN + Back RGB ライトのオン/オフ

FN + PAUSE バックライト効果の変更

FN + Home バックライト色の変更

FN + PgUp イルミネーション効果の方向

FN + ←→ バックライトスピード

FN + ↑↓ バックライトの明るさ

FN + Right CTRL サイドライト効果の変更

FN + Right ALT サイドライト色の変更

FN + [] サイドライトの明るさ

FN + ; " サイドライトスピード

公式サイト : www.yunzii.com

Eメール: support@yunzii.com

キーボードソフトウェア

ダウンロード方法:

1. 公式サイトwww.yunzii.comを開いて、ドライバーをクリックします。
2. ダウンロードしたドライバパッケージを解凍し、exeファイルを実行してインストールしてください。
3. インストールが完了したら、有線モードを使用してコンピューターに接続すると、ドライバーが自動的にキーボードを認識します。
4. 接続が完了したら、ドライバーの使用を開始します。

ソフトウェアダウンロード URL : www.yunzii.com

システムサポート : Windows


Eメール: support@yunzii.com

ドライバーの更新


ドライバーで、右下隅にある[ドライバーの更新]をクリックして、最新バージョンのドライバーを取得します。

REPLACE KEYCAPS AND SWITCH

Included Tools



Mechanical Switch

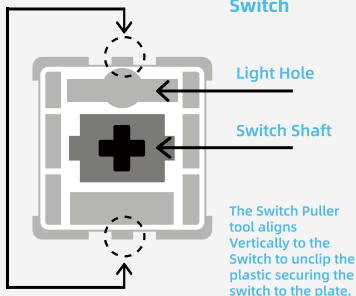

Remove Keycaps

1. Grab your Keycap Puller Tool and place it above the keycap you want to remove at a 90 degree angle.
2. Push your Keycap Puller down until the metal hooks to open themselves and grab the keycap from underneath.
3. Grab your Keyboard firmly and pull the keycap in a vertical motion.

Install Keycaps

1. Make sure the Keycap is properly oriented in your keyboard and place it above the switch.
2. Push the keycap into the switch shaft firmly.

Install Switches

1. Check that all the switch metallic pins are perfectly straight and clean.
2. Align the switch lamp hole with the backlight. The pins align themselves to the keyboard PCB.
3. Press the switch down until you hear a click. This means your switch clips have attached themselves to the keyboard plate.
4. Inspect the switch to ensure it's properly attached to your keyboard, and test it.

Remove Switches

1. Grab your Switch Removal Tool and align the gripping teeth vertically (on the Y-Axis) at the center of the switch, as shown in the example graphic above.
2. Grab the switch with the Switch Puller and apply pressure until the switch releases itself from the plate.
3. Using firm but gentle force pull the switch away from the keyboard using a vertical motion.



Note: If the key doesn't work, you may have bent one of the switches while installing it. Pull the switch out and repeat the process.

Pins may be damaged beyond repair and need replacement if this process is not done correctly. Never apply excessive force when replacing keycaps or switches. If you cannot remove or install keycaps or switches, please contact customer service as soon as possible to avoid damage to the keyboard due to operating errors.