




Product Introduction	1. Support real-time management and release on mobile, iPad and PC	
	2. Support remote upgrade of advertising player software version and OTA upgrade	
	3. Support the advertising machines in the same group can be played synchronously and the synchronization interval is less than 500ms	
	4. Support the mobile phone to remotely set the properties of the advertising player, control the volume, rotation angle, time zone, turn off and turn on the advertising player	
	5. Support remote monitoring of the network status, system status and hardware status of the advertising player, and monitor the content of the advertising player	
	6. Support the needs of multiple forms of rolling subtitles and bullet screens, the font, size and content of subtitles and bullet screens can be edited	
	7. Scheduling supports multiple priority levels, and supports shim/normal/interrupt/emergency message priority	
	8. Scheduling supports multiple recurring modes, recurring by day/week/month	
	9. It can support multiple media such as video/picture/marquee/subtitle/RSS/component/ppt/pdf	
	10. Support self-built template mobile phone one-key call to modify at any time	
Display parameters	Model	15.1"
	Panel Type	a-Si TFT-LCD
	Display area	374.78mm(H)x64.5mm (V)
	Display Proportion	3: 1
	Resolution	1280X235
	Display Color	16.7M
	Dot Pitch	0.630(H)x0.630 (V)
	Brightness	600CD
	Contrast	1500: 1
	Viewing angle	178°
	Response Time	8ms
Refresh Rate	60Hz	
Manual Language	Chinese/English	
Display Interface	Video Interface	NA
	Audio interface	N/A
	Other	N/A
System Parameters	CPU	ARM Corter-A35 Quad core
	DDR	1G DDR3
	Flash	8G EMMC
	Wifi	2.4G WIFI
	Bluetooth	N/A
	Network Card	N/A
	Interface support	TF Card×1/OTG×1/Type-c×1
	System Version	Android 8.1
Power	Input Voltage	~ AC 100-240V 50/60Hz
	Maximum power	25W
	Standby power	≤0.1W (Board only)
Other	storage temperature	-20--60°
	Amplifier power	1×1.3W
	Product Size	402.58×91.8×26.2mm
	Package Size	
	Product Weight	1.3KG
Attachment	Remote Control	N/A
	AC power adapter	AC 12V/2A


Structural drawings:



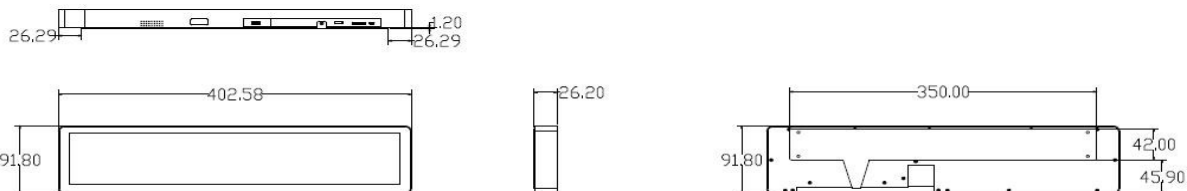

Product Introduction	1. Support real-time management and release on mobile, iPad and PC	
	2. Support remote upgrade of advertising player software version and OTA upgrade	
	3. Support the advertising machines in the same group can be played synchronously and the synchronization interval is less than 500ms	
	4. Support the mobile phone to remotely set the properties of the advertising player, control the volume, rotation angle, time zone, turn off and turn on the advertising player	
	5. Support remote monitoring of the network status, system status and hardware status of the advertising player, and monitor the content of the advertising player	
	6. Support the needs of multiple forms of rolling subtitles and bullet screens, the font, size and content of subtitles and bullet screens can be edited	
	7. Scheduling supports multiple priority levels, and supports shim/normal/interrupt/emergency message priority	
	8. Scheduling supports multiple recurring modes, recurring by day/week/month	
	9. It can support multiple media such as video/picture/marquee/subtitle/RSS/component/ppt/pdf	
	10. Support self-built template mobile phone one-key call to modify at any time	
Display parameters	Model	21.2"
	Panel Type	a-Si TFT-LCD
	Display area	518mm(H)x148mm (V)
	Display Proportion	>3: 1
	Resolution	1920X550
	Display Color	16.7M
	Dot Pitch	0.090(H)x0.270(V)mm
	Brightness	400CD
	Contrast	1500: 1
	Viewing angle	178°
	Response Time	8ms
	Refresh Rate	60Hz
Display Interface	Manual Language	Chinese/English
	Video Interface	NA
	Audio interface	N/A
System Parameters	Other	N/A
	CPU	ARM Corter-A35 Quad core
	DDR	1G DDR3
	Flash	8G EMMC
	Wifi	2.4G WIFI
	Bluetooth	N/A
	Network Card	N/A
	Interface support	TF Card×1/OTG×1/Type-c×1
Power	System Version	Android 8.1
	Input Voltage	~ AC 100-240V 50/60Hz
	Maximum power	20W
Other	Standby power	≤0.1W (Board only)
	storage temperature	-20--60°
	Amplifier power	1×1.3W
	Product Size	544×178×28mm
	Pakage Size	
Attachment	Product Weight	2.5KG
	Remote Control	N/A
	AC power adapter	AC 12V/2A


Structural drawings:

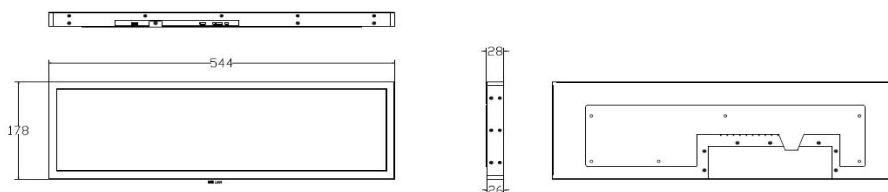



Product Introduction	1. Support real-time management and release on mobile, iPad and PC	
	2. Support remote upgrade of advertising player software version and OTA upgrade	
	3. Support the advertising machines in the same group can be played synchronously and the synchronization interval is less than 500ms	
	4. Support the mobile phone to remotely set the properties of the advertising player, control the volume, rotation angle, time zone, turn off and turn on the advertising player	
	5. Support remote monitoring of the network status, system status and hardware status of the advertising player, and monitor the content of the advertising player	
	6. Support the needs of multiple forms of rolling subtitles and bullet screens, the font, size and content of subtitles and bullet screens can be edited	
	7. Scheduling supports multiple priority levels, and supports shim/normal/interrupt/emergency message priority	
	8. Scheduling supports multiple recurring modes, recurring by day/week/month	
	9. It can support multiple media such as video/picture/marquee/subtitle/RSS/component/ppt/pdf	
	10. Support self-built template mobile phone one-key call to modify at any time	
Display parameters	Model	23.1"
	Panel Type	a-Si TFT-LCD
	Display area	518mm(H)x148mm (V)
	Display Proportion	>3: 1
	Resolution	1920X158
	Display Color	16.7M
	Dot Pitch	0.10167(H)×0.305(V)mm
	Brightness	250CD
	Contrast	1500: 1
	Viewing angle	178°
	Response Time	8ms
	Refresh Rate	60Hz
Manual Language	Chinese/English	
Display Interface	Video Interface	NA
	Audio interface	N/A
	Other	N/A
System Parameters	CPU	ARM Corter-A35 Quad core
	DDR	1G DDR3
	Flash	8G EMMC
	Wifi	2.4G WIFI
	Bluetooth	N/A
	Network Card	N/A
	Interface support	TF Card×1/OTG×1/Type-c×1
System Version	Android 8.1	
Power	Input Voltage	~ AC 100-240V 50/60Hz
	Maximum power	20W
	Standby power	≤0.1W (Board only)
Other	storage temperature	-20--60°
	Amplifier power	1×1.3W
	Product Size	597.4×60.4×15.8mm
	Package Size	
	Product Weight	0.6KG
Attachment	Remote Control	N/A
	AC power adapter	AC 12V/2A


Structural drawings:

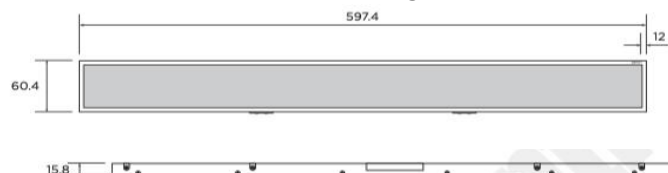



Product Introduction	1. Support real-time management and release on mobile, iPad and PC	
	2. Support remote upgrade of advertising player software version and OTA upgrade	
	3. Support the advertising machines in the same group can be played synchronously and the synchronization interval is less than 500ms	
	4. Support the mobile phone to remotely set the properties of the advertising player, control the volume, rotation angle, time zone, turn off and turn on the advertising player	
	5. Support remote monitoring of the network status, system status and hardware status of the advertising player, and monitor the content of the advertising player	
	6. Support the needs of multiple forms of rolling subtitles and bullet screens, the font, size and content of subtitles and bullet screens can be edited	
	7. Scheduling supports multiple priority levels, and supports shim/normal/interrupt/emergency message priority	
	8. Scheduling supports multiple recurring modes, recurring by day/week/month	
	9. It can support multiple media such as video/picture/marquee/subtitle/RSS/component/ppt/pdf	
	10. Support self-built template mobile phone one-key call to modify at any time	
Display parameters	Model	23.6"
	Panel Type	a-Si TFT-LCD
	Display area	597.89mm(H)x66.6mm (V)
	Display Proportion	>3: 1
	Resolution	1920X213
	Display Color	16.7M
	Dot Pitch	0.0976(H)×0.2928(V)mm
	Brightness	500CD
	Contrast	1500: 1
	Viewing angle	178°
	Response Time	8ms
	Refresh Rate	60Hz
Manual Language	Chinese/English	
Display Interface	Video Interface	NA
	Audio interface	N/A
	Other	N/A
System Parameters	CPU	ARM Corter-A35 Quad core
	DDR	1G DDR3
	Flash	8G EMMC
	Wifi	2.4G WIFI
	Bluetooth	N/A
	Network Card	N/A
	Interface support	TF Card×1/OTG×1/Type-c×1
	System Version	Android 8.1
Power	Input Voltage	~ AC 100-240V 50/60Hz
	Maximum power	26W
	Standby power	≤0.1W (Board only)
Other	storage temperature	-20--60°
	Amplifier power	1×1.3W
	Product Size	621.99×91.8×25mm
	Package Size	
	Product Weight	1.6KG
Attachment	Remote Control	N/A
	AC power adapter	AC 12V/2A


Structural drawings:

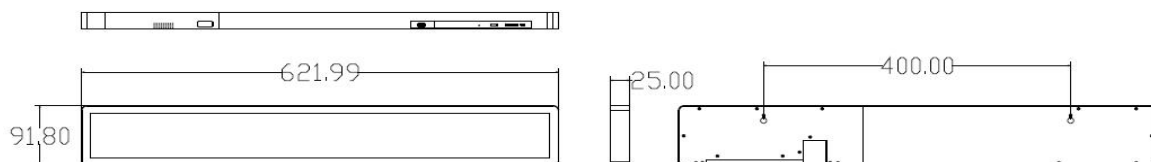



Product Introduction	1. Support real-time management and release on mobile, iPad and PC	
	2. Support remote upgrade of advertising player software version and OTA upgrade	
	3. Support the advertising machines in the same group can be played synchronously and the synchronization interval is less than 500ms	
	4. Support the mobile phone to remotely set the properties of the advertising player, control the volume, rotation angle, time zone, turn off and turn on the advertising player	
	5. Support remote monitoring of the network status, system status and hardware status of the advertising player, and monitor the content of the advertising player	
	6. Support the needs of multiple forms of rolling subtitles and bullet screens, the font, size and content of subtitles and bullet screens can be edited	
	7. Scheduling supports multiple priority levels, and supports shim/normal/interrupt/emergency message priority	
	8. Scheduling supports multiple recurring modes, recurring by day/week/month	
	9. It can support multiple media such as video/picture/marquee/subtitle/RSS/component/ppt/pdf	
	10. Support self-built template mobile phone one-key call to modify at any time	
Display parameters	Model	23.7"
	Panel Type	a-Si TFT-LCD
	Display area	597.89mm(H)x74.74mm (V)
	Display Proportion	>3: 1
	Resolution	1920X240
	Display Color	16.7M
	Dot Pitch	0.1038(H)x0.3114(V)mm
	Brightness	500CD
	Contrast	1500: 1
	Viewing angle	178°
	Response Time	8ms
Refresh Rate	60Hz	
Manual Language	Chinese/English	
Display Interface	Video Interface	NA
	Audio interface	N/A
	Other	N/A
System Parameters	CPU	ARM Corter-A35 Quad core
	DDR	1G DDR3
	Flash	8G EMMC
	Wifi	2.4G WIFI
	Bluetooth	N/A
	Network Card	N/A
	Interface support	TF Cardx1/OTGx1/Type-cx1
	System Version	Android 8.1
Power	Input Voltage	~ AC 100-240V 50/60Hz
	Maximum power	26W
	Standby power	≤0.1W (Board only)
Other	storage temperature	-20--60°
	Amplifier power	1x1.3W
	Product Size	621.9x98.74x26.7mm
	Package Size	
	Product Weight	1.6KG
Attachment	Remote Control	N/A
	AC power adapter	AC 12V/2A


Structural drawings:

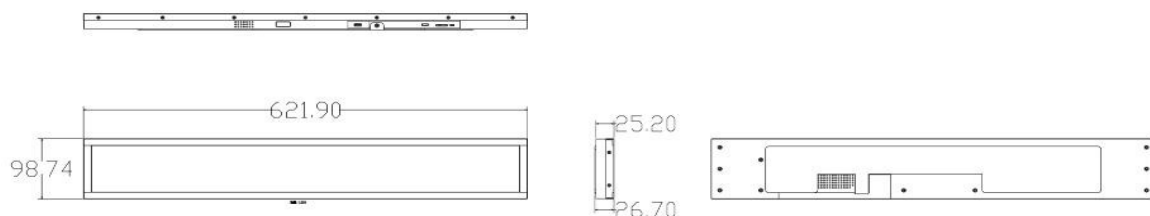



Product Introduction	1. Support real-time management and release on mobile, iPad and PC	
	2. Support remote upgrade of advertising player software version and OTA upgrade	
	3. Support the advertising machines in the same group can be played synchronously and the synchronization interval is less than 500ms	
	4. Support the mobile phone to remotely set the properties of the advertising player, control the volume, rotation angle, time zone, turn off and turn on the advertising player	
	5. Support remote monitoring of the network status, system status and hardware status of the advertising player, and monitor the content of the advertising player	
	6. Support the needs of multiple forms of rolling subtitles and bullet screens, the font, size and content of subtitles and bullet screens can be edited	
	7. Scheduling supports multiple priority levels, and supports shim/normal/interrupt/emergency message priority	
	8. Scheduling supports multiple recurring modes, recurring by day/week/month	
	9. It can support multiple media such as video/picture/marquee/subtitle/RSS/component/ppt/pdf	
	10. Support self-built template mobile phone one-key call to modify at any time	
Display parameters	Model	24"
	Panel Type	a-Si TFT-LCD
	Display area	597.888mm(H)x112.104mm (V)
	Display Proportion	>3: 1
	Resolution	1920X360
	Display Color	16.7M
	Dot Pitch	0.090(H)x0.270(V)mm
	Brightness	400CD
	Contrast	1500: 1
	Viewing angle	178°
	Response Time	8ms
	Refresh Rate	60Hz
Manual Language	Chinese/English	
Display Interface	Video Interface	NA
	Audio interface	N/A
	Other	N/A
System Parameters	CPU	ARM Corter-A35 Quad core
	DDR	1G DDR3
	Flash	8G EMMC
	Wifi	2.4G WIFI
	Bluetooth	N/A
	Network Card	100mb LANX1
	Interface support	TF Cardx1/USBx1/SDx1
	System Version	Android 8.1
Power	Input Voltage	~ AC 100-240V 50/60Hz
	Maximum power	35W
	Standby power	≤0.1W (Board only)
Other	storage temperature	-20--60°
	Amplifier power	1x1.3W
	Product Size	629.1x143.5x51.5mm
	Package Size	
	Product Weight	3.8KG
Attachment	Remote Control	N/A
	AC power adapter	AC 12V/3A


Structural drawings:

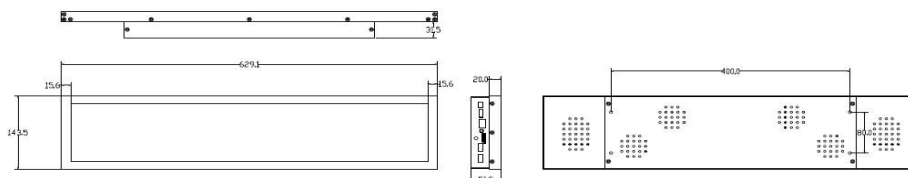



Product Introduction	1. Support real-time management and release on mobile, iPad and PC	
	2. Support remote upgrade of advertising player software version and OTA upgrade	
	3. Support the advertising machines in the same group can be played synchronously and the synchronization interval is less than 500ms	
	4. Support the mobile phone to remotely set the properties of the advertising player, control the volume, rotation angle, time zone, turn off and turn on the advertising player	
	5. Support remote monitoring of the network status, system status and hardware status of the advertising player, and monitor the content of the advertising player	
	6. Support the needs of multiple forms of rolling subtitles and bullet screens, the font, size and content of subtitles and bullet screens can be edited	
	7. Scheduling supports multiple priority levels, and supports shim/normal/interrupt/emergency message priority	
	8. Scheduling supports multiple recurring modes, recurring by day/week/month	
	9. It can support multiple media such as video/picture/marquee/subtitle/RSS/component/ppt/pdf	
	10. Support self-built template mobile phone one-key call to modify at any time	
Display parameters	Model	24.5"
	Panel Type	a-Si TFT-LCD
	Display area	597.6mm(H)x168.08mm (V)
	Display Proportion	>3: 1
	Resolution	1920X540
	Display Color	16.7M
	Dot Pitch	0.0976(H)×0.2928(V)mm
	Brightness	500CD
	Contrast	1500: 1
	Viewing angle	178°
	Response Time	8ms
Refresh Rate	60Hz	
Manual Language	Chinese/English	
Display Interface	Video Interface	NA
	Audio interface	N/A
	Other	N/A
System Parameters	CPU	ARM Corter-A35 Quad core
	DDR	1G DDR3
	Flash	8G EMMC
	Wifi	2.4G WIFI
	Bluetooth	N/A
	Network Card	N/A
	Interface support	TF Card×1/OTG×1/Type-c×1
	System Version	Android 8.1
Power	Input Voltage	~ AC 100-240V 50/60Hz
	Maximum power	35W
	Standby power	≤0.1W (Board only)
Other	storage temperature	-20--60°
	Amplifier power	1×1.3W
	Product Size	622×192×41mm
	Package Size	
	Product Weight	3.5KG
Attachment	Remote Control	N/A
	AC power adapter	AC 12V/3A


Structural drawings:

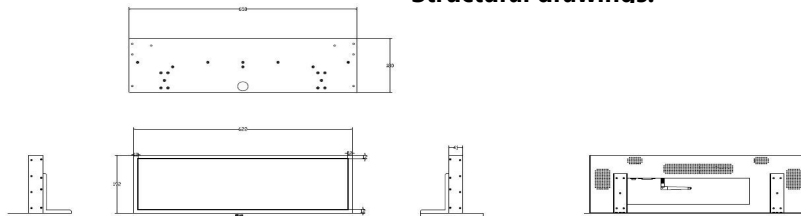



Product Introduction	1. Support real-time management and release on mobile, iPad and PC	
	2. Support remote upgrade of advertising player software version and OTA upgrade	
	3. Support the advertising machines in the same group can be played synchronously and the synchronization interval is less than 500ms	
	4. Support the mobile phone to remotely set the properties of the advertising player, control the volume, rotation angle, time zone, turn off and turn on the advertising player	
	5. Support remote monitoring of the network status, system status and hardware status of the advertising player, and monitor the content of the advertising player	
	6. Support the needs of multiple forms of rolling subtitles and bullet screens, the font, size and content of subtitles and bullet screens can be edited	
	7. Scheduling supports multiple priority levels, and supports shim/normal/interrupt/emergency message priority	
	8. Scheduling supports multiple recurring modes, recurring by day/week/month	
	9. It can support multiple media such as video/picture/marquee/subtitle/RSS/component/ppt/pdf	
	10. Support self-built template mobile phone one-key call to modify at any time	
Display parameters	Model	28"
	Panel Type	a-Si TFT-LCD
	Display area	699.84mm(H)x131.22mm (V)
	Display Proportion	>3: 1
	Resolution	1920X360
	Display Color	16.7M
	Dot Pitch	0.1215(H)×0.3645(V)mm
	Brightness	700CD
	Contrast	1500: 1
	Viewing angle	178°
	Response Time	8ms
	Refresh Rate	60Hz
Manual Language	Chinese/English	
Display Interface	Video Interface	NA
	Audio interface	N/A
	Other	N/A
System Parameters	CPU	ARM Corter-A35 Quad core
	DDR	1G DDR3
	Flash	8G EMMC
	Wifi	2.4G WIFI
	Bluetooth	N/A
	Network Card	100MB LANX1
	Interface support	TF Card×1/USB×1/SD×1
	System Version	Android 8.1
Power	Input Voltage	~ AC 100-240V 50/60Hz
	Maximum power	42W
	Standby power	≤0.1W (Board only)
Other	storage temperature	-20--60°
	Amplifier power	1×1.3W
	Product Size	749.9×181.3×54.7mm
	Package Size	
	Product Weight	3.9KG
Attachment	Remote Control	N/A
	AC power adapter	AC 12V/4A


Structural drawings:

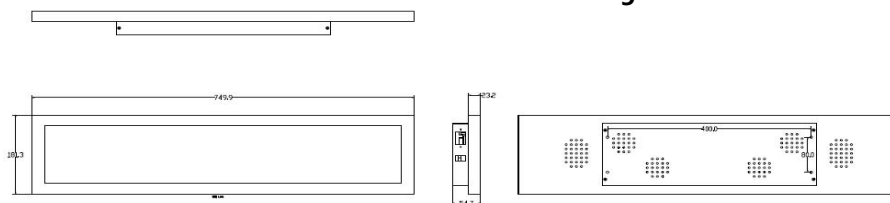



Product Introduction	1. Support real-time management and release on mobile, iPad and PC 2. Support remote upgrade of advertising player software version and OTA upgrade 3. Support the advertising machines in the same group can be played synchronously and the synchronization interval is less than 500ms 4. Support the mobile phone to remotely set the properties of the advertising player, control the volume, rotation angle, time zone, turn off and turn on the advertising player 5. Support remote monitoring of the network status, system status and hardware status of the advertising player, and monitor the content of the advertising player 6. Support the needs of multiple forms of rolling subtitles and bullet screens, the font, size and content of subtitles and bullet screens can be edited 7. Scheduling supports multiple priority levels, and supports shim/normal/interrupt/emergency message priority 8. Scheduling supports multiple recurring modes, recurring by day/week/month 9. It can support multiple media such as video/picture/marquee/subtitle/RSS/component/ppt/pdf 10. Support self-built template mobile phone one-key call to modify at any time		
	Display parameters	Model	35"
		Panel Type	a-Si TFT-LCD
		Display area	878.4mm(H)x48.19mm (V)
		Display Proportion	> 3: 1
		Resolution	2880X158
		Display Color	16.7M
		Dot Pitch	0.101667(H)x0.305(V)mm
		Brightness	300CD
		Contrast	1500: 1
Viewing angle		178°	
Display Interface	Response Time	8ms	
	Refresh Rate	60Hz	
	Manual Language	Chinese/English	
Display Interface	Video Interface	NA	
	Audio interface	N/A	
	Other	N/A	
System Parameters	CPU	ARM Cortex-A55 Quad core	
	DDR	2G DDR3	
	Flash	8G EMMC	
	Wifi	2.4G WIFI	
	Bluetooth	N/A	
	Network Card	N/A	
	Interface support	TF Card×1/OTG×1/Type-c×1	
	System Version	Android 9.0	
Power	Input Voltage	~ AC 100-240V 50/60Hz	
	Maximum power	38W	
	Standby power	≤0.1W (Board only)	
Other	storage temperature	-20--60°	
	Amplifier power	1×1.3W	
	Product Size	891.6×60.4×15.8mm	
	Package Size		
Attachment	Product Weight	1.4KG	
	Remote Control	N/A	
	AC power adapter	AC 12V/4A	

Structural drawings:

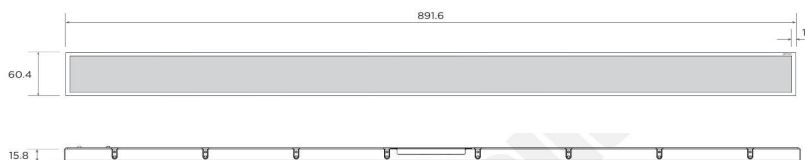



Product Introduction	1. Support real-time management and release on mobile, iPad and PC	
	2. Support remote upgrade of advertising player software version and OTA upgrade	
	3. Support the advertising machines in the same group can be played synchronously and the synchronization interval is less than 500ms	
	4. Support the mobile phone to remotely set the properties of the advertising player, control the volume, rotation angle, time zone, turn off and turn on the advertising player	
	5. Support remote monitoring of the network status, system status and hardware status of the advertising player, and monitor the content of the advertising player	
	6. Support the needs of multiple forms of rolling subtitles and bullet screens, the font, size and content of subtitles and bullet screens can be edited	
	7. Scheduling supports multiple priority levels, and supports shim/normal/interrupt/emergency message priority	
	8. Scheduling supports multiple recurring modes, recurring by day/week/month	
	9. It can support multiple media such as video/picture/marquee/subtitle/RSS/component/ppt/pdf	
	10. Support self-built template mobile phone one-key call to modify at any time	
Display parameters	Model	50.1"
	Panel Type	a-Si TFT-LCD
	Display area	1209.6mm(H)x397mm (V)
	Display Proportion	>2: 1
	Resolution	1920X630
	Display Color	16.7M
	Dot Pitch	0.210(H)x0.630(V)mm
	Brightness	500CD
	Contrast	2000: 1
	Viewing angle	178°
	Response Time	8ms
	Refresh Rate	60Hz
Manual Language	Chinese/English	
Display Interface	Video Interface	NA
	Audio interface	N/A
	Other	N/A
System Parameters	CPU	ARM Cortex-A35 Quad core
	DDR	2G DDR3
	Flash	8G EMMC
	Wifi	2.4G WIFI
	Bluetooth	N/A
	Network Card	100MB LANX1
	Interface support	TF Cardx1/USBx1/Type-cx1
	System Version	Android 8.1
Power	Input Voltage	~ AC 100-240V 50/60Hz
	Maximum power	65W
	Standby power	≤0.1W (Board only)
Other	storage temperature	-20--60°
	Amplifier power	2x8W
	Product Size	1247.6x435x46mm
	Package Size	
Attachment	Product Weight	4.8KG
	Remote Control	N/A
	AC power adapter	AC 24V 3Amp

Structural drawings:

