


Mobile LED Poster

Smart APP controlled mobile folding LED Display Screen



Mobile Large Screen

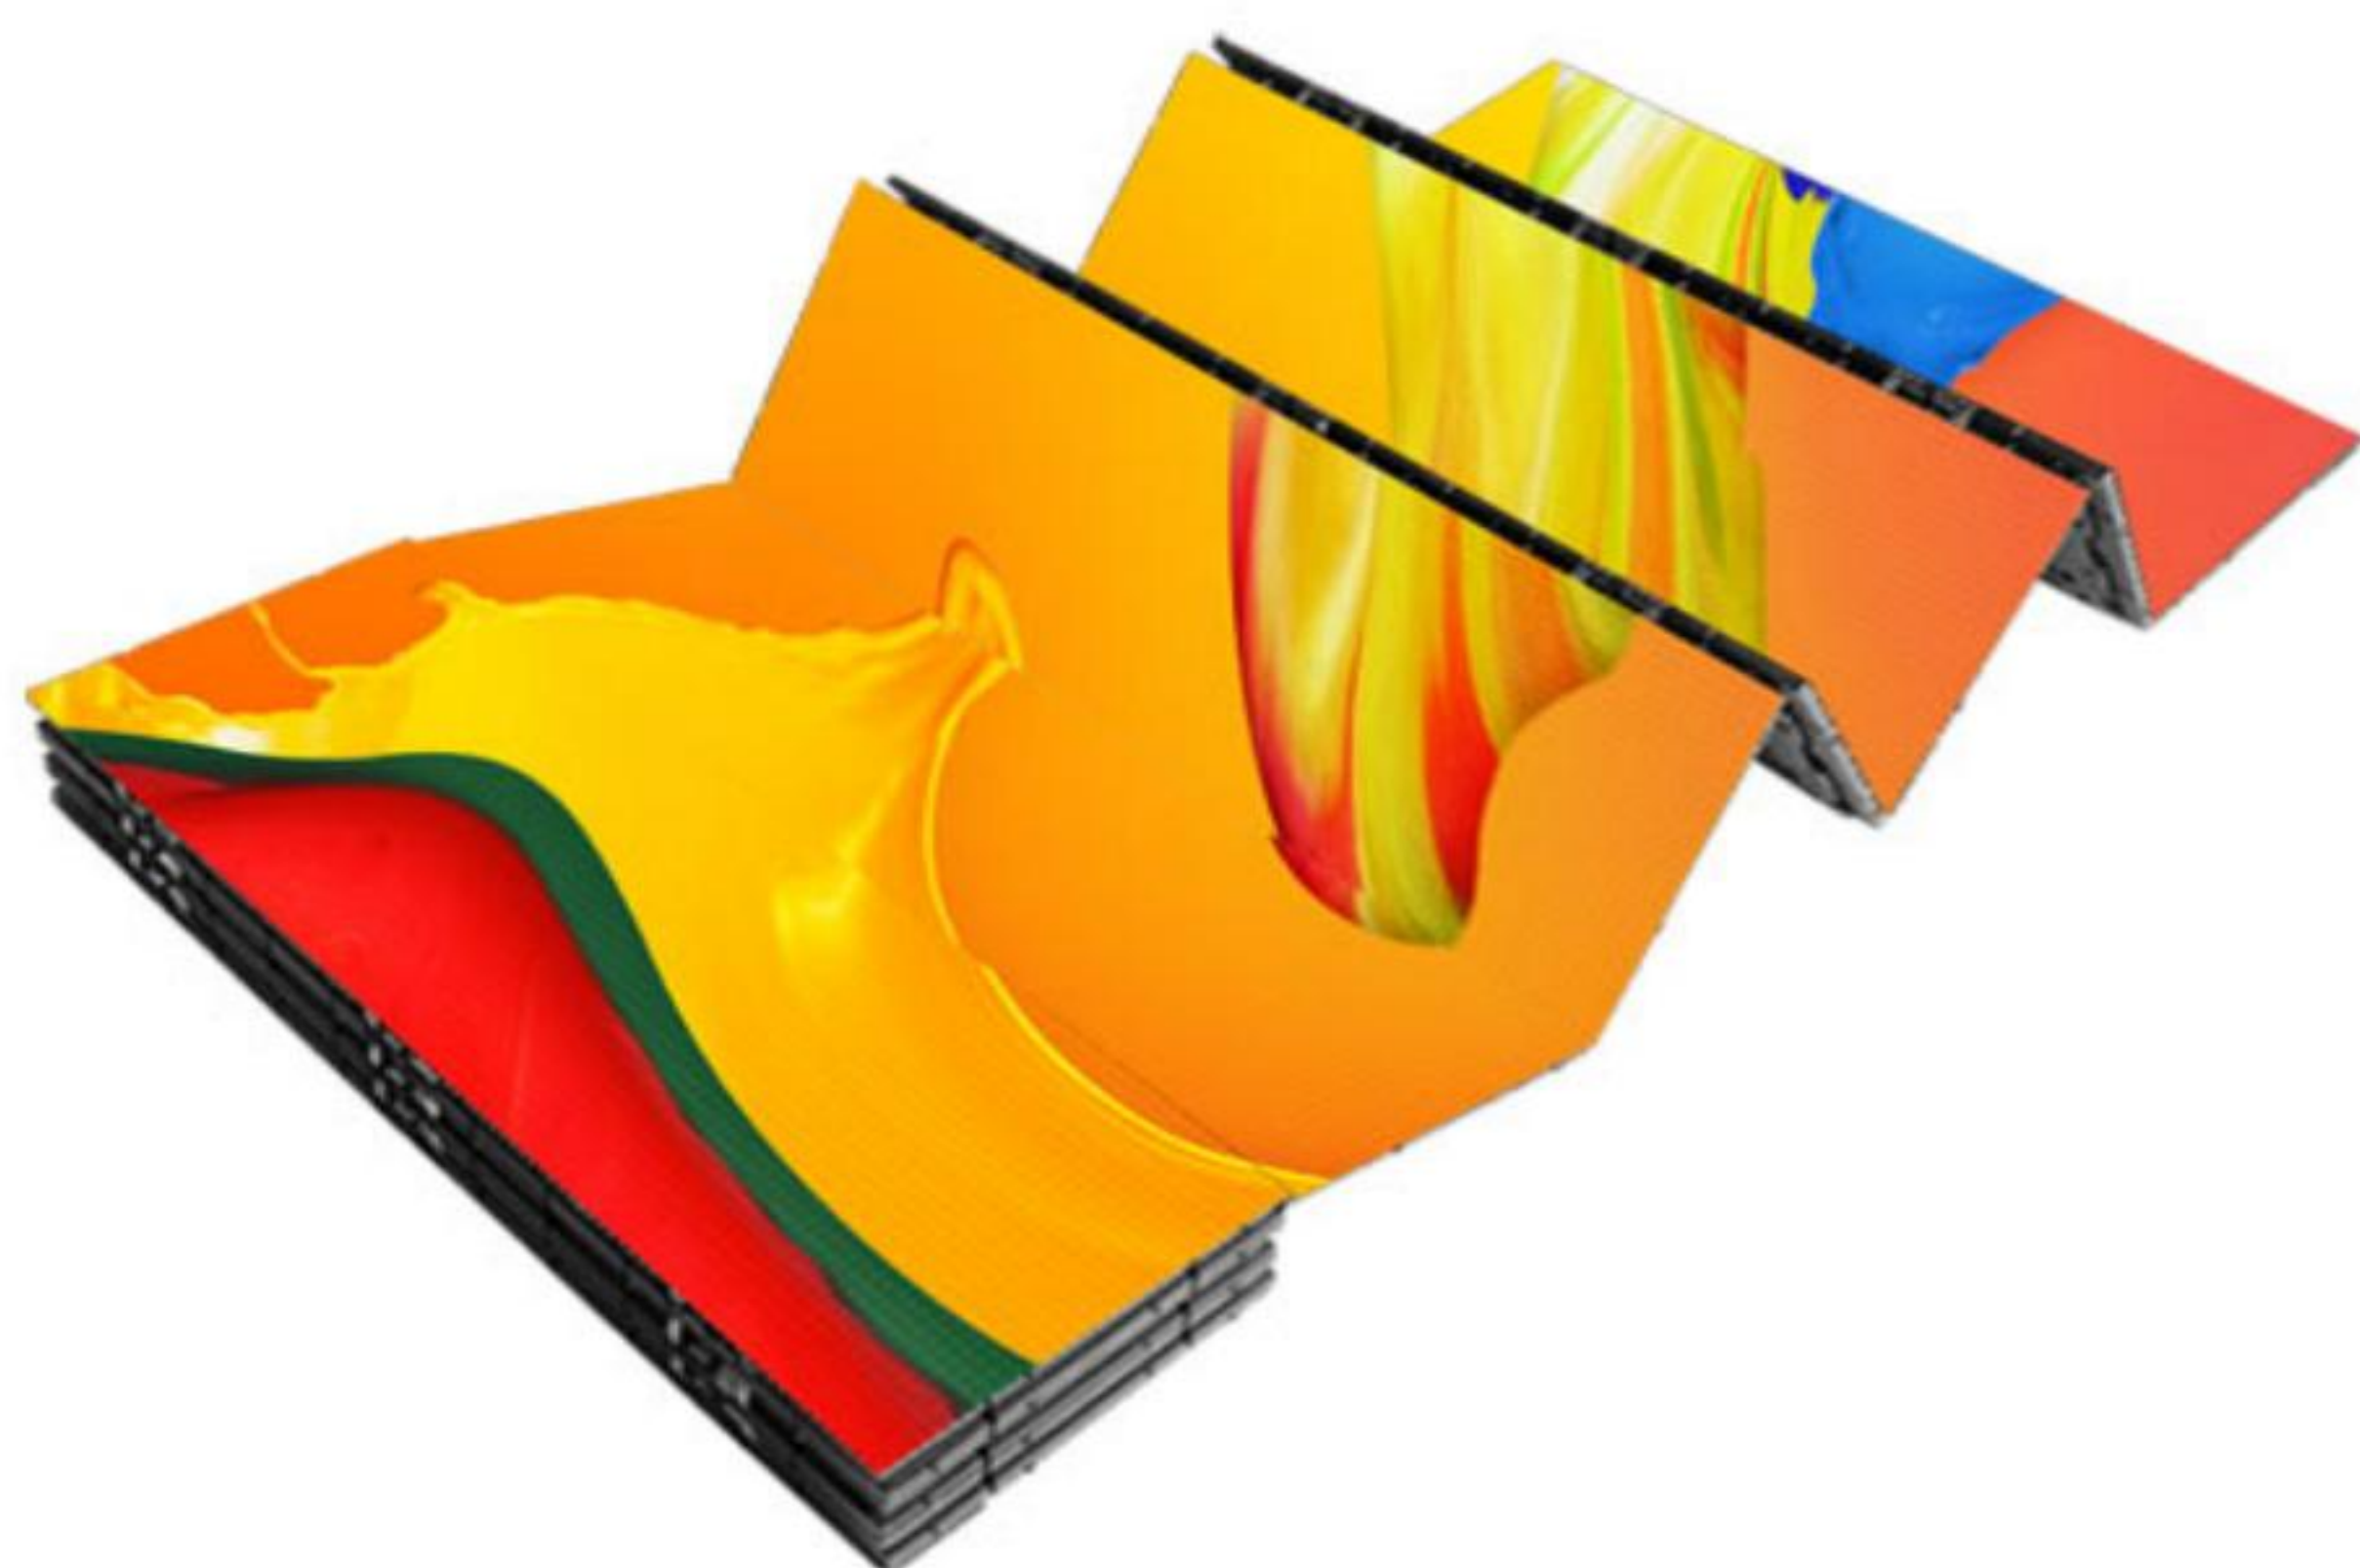

Thin, light and 360° Foldable

Mobile Lifiable and Lowerable LED Poster Display Screen Kit

Features:

1. Large screen, small size, more convenient

* Small size EP4 three air boxes, can be built on 3m wide X4m tall screen, no need for truss

* Installation is fast. Complete the construction of 3m X 4m screen. 2 engineers only need 5 minutes.



2. Lightweight, 360° foldable

* Thin thickness The screen thickness is only 15mm, light weight, small space after folding, reducing transportation costs

* Outdoor up to 4000HZ refresh rate, making the picture quality smoothed

3. High Quality Picture and Refresh Rate

* Up to 4000HZ, which produce stable and clear pictures



4. Movable, suitable for a variety of scenarios

Widely used in indoor and outdoor stage screen construction, conferences, performances, celebrations, square stage, wedding events, etc.



HuaKe

CO: SHENZHEN HUAKE LIGHT ELECTRONICS CO., LTD
HUAKE LIMITED

MAIL: info@ledlightsworld.com info@360digitalsignage.com

WEB: <https://www.ledlightsworld.com>

<https://www.360digitalsignage.com>

ADD: 1#,chaxi SanWei industrial Zone,
GuShu,XiXiang,BaoAn
ShenZhen,GuangDong,518126,China.



Mobile Liftable and Lowerable LED Poster Display Screen Kit




All-in-One




Seamless, Frameless, Unlimited Splicing

It solves the visual defects of the large-screen picture being segmented, presents a large and complete display picture, and can be infinitely spliced horizontally to meet the needs of various occasions.

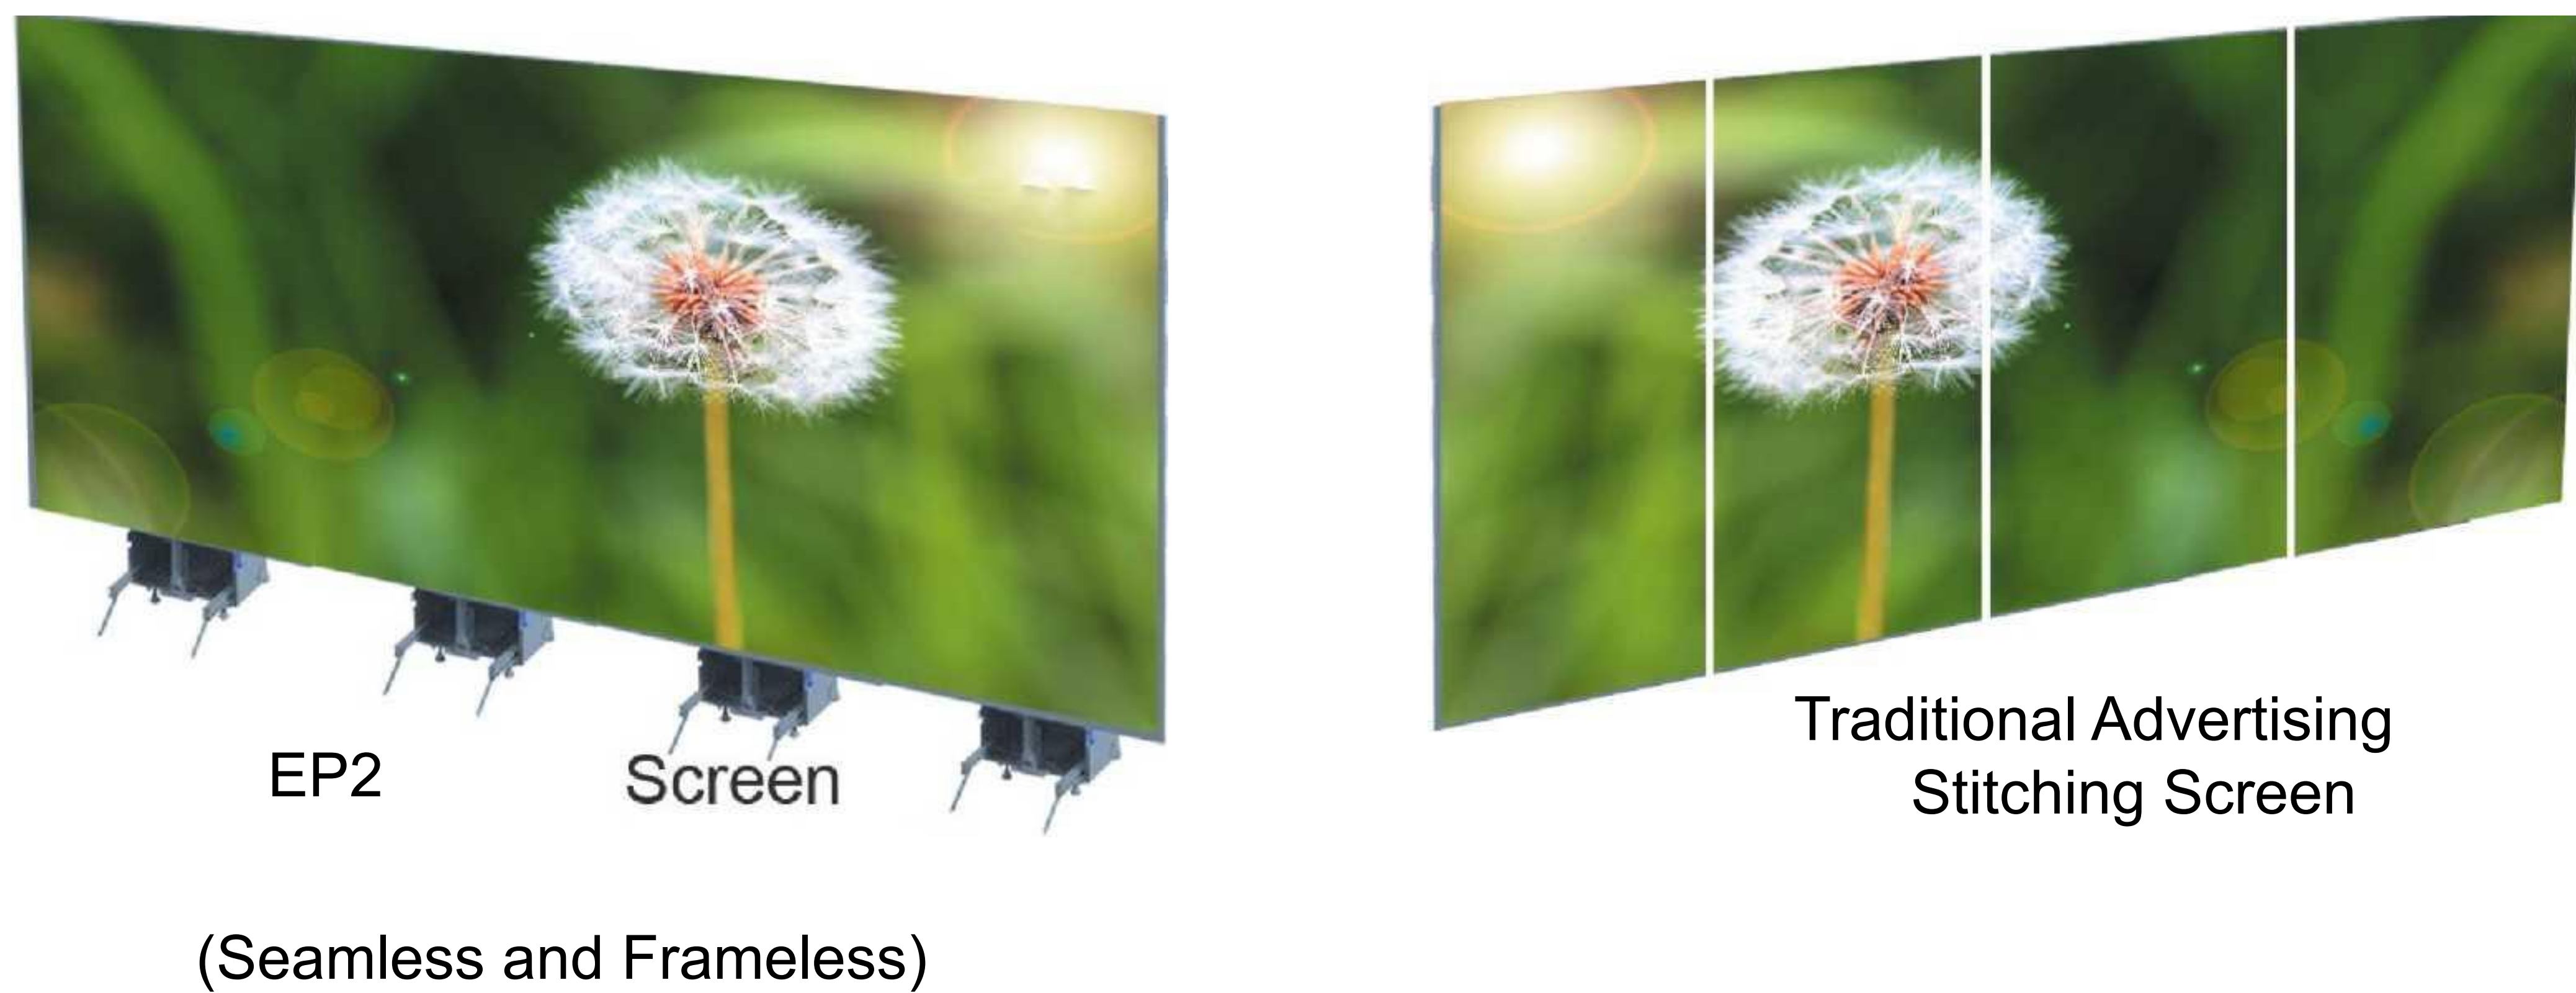

(Seamless and Frameless)

One Button Remote Control, Auto Update

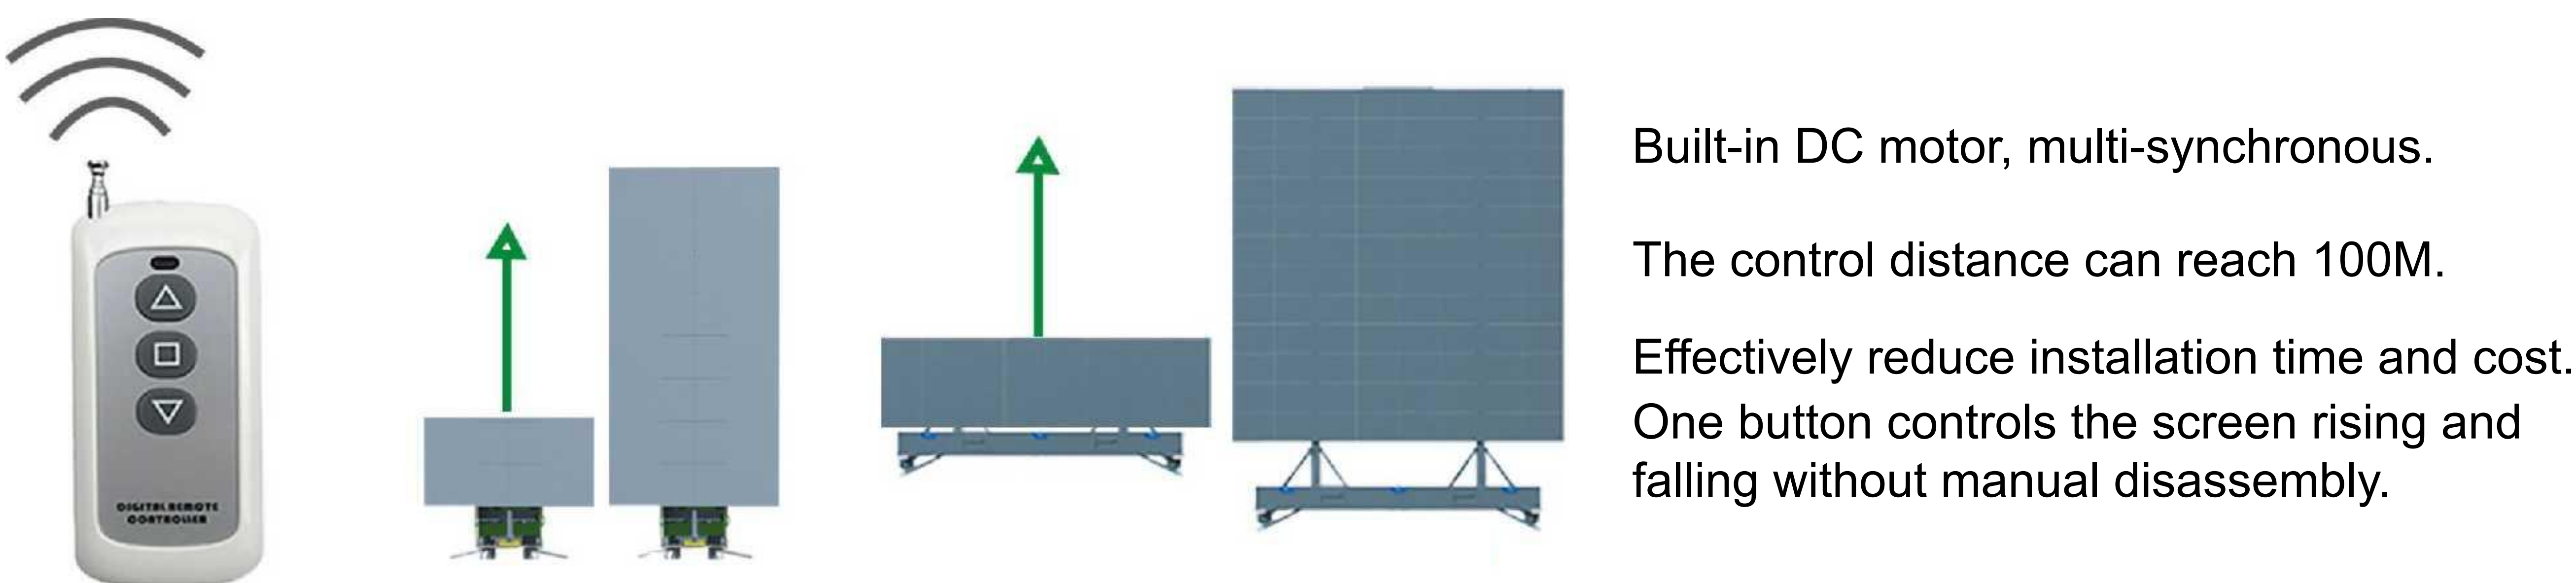

SPECIFICATION

Screen parameters

Model #	EP2	EP22	EP4
Screen Size	1M x 2M	1M x 2.25M	1M x 4M
Screen Area	2SQM	2.25 SQM	4SQM
Brightness	1000cd/m2	1000cd/m2	1000cd/m2
Refresh frequency	4000HZ	4000HZ	4000HZ
Box Size	1390*410*325(mm)		
Box Weight	70KGS	75KGS	120KGS
Input Voltage	100-240VAC		
Max Power	690Watt/SQM		
Screen thickness	15mm		
Waterproof grade	IP43		
Module Size	250x250mm		
Folding Angle	360 degree forward and backward folding		
Pixel Pitch	P3.91		
Screen Weight	12kg/m2		
NOTE: The Screen can be made to IP54 rated for outdoor use ; cost differently.			

Control box parameters

External Batttery Access	DC24V
Built-in Power Supply	RSP1000W-24
Asynchromonous Card	Built-in Nova T1, WiFi Connected,Loading capacity up to 650,000 dots
Receiving Card	Nova A4S

Electric lifting parameters

Working Voltage	DC24V
Working Current	Max 0.6A
Manipulation mode	Remote Control
Telescopic speed	Max 17mm/s