

0810 Coupler (HP)

HC1001-P



1x2 780 nm High Power PM Filter Coupler, 20 W

The HC1001-P has low insertion loss, high return loss and high extinction ratio. It can be used for EDFA & raman amplifier, fiber sensor and fiber laser.



FEATURES

- Low Insertion Loss
- High Return Loss
- High Extinction Ratio

USE IN

- EDFA & Raman Amplifier
- Fiber Sensor
- Fiber Laser

MECHANICAL DRAWING

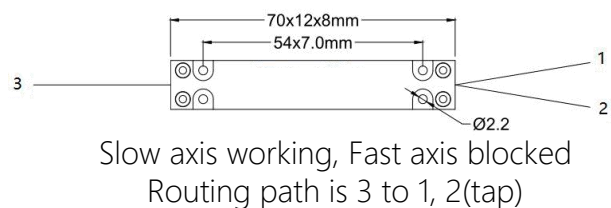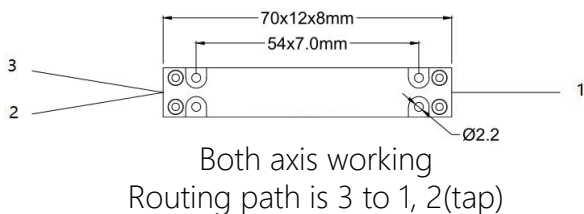

Type	1x2	
Center Wavelength	780 nm	
Operating Bandwidth Range	±10 nm	
Excess Loss	0.8 dB max.	
Extinction Ratio	Both Axis Working	20 dB min.
	Fast Axis Blocked	22 dB min.
Return Loss	50 dB min.	
Optical Power	20 W max. or Specified	
Tensile Load	5 N max.	
Package Dimensions	Input Power ≤5 W	5.5x5.5x35 mm
	Input Power ≤20 W	70x12x8 mm
Operating Temperature	-5°C to +70°C	
Storage Temperature	-40°C to +85°C	
Coupling Ratio	01/99 to 50/50	