


**B875**

**Receiving Card**

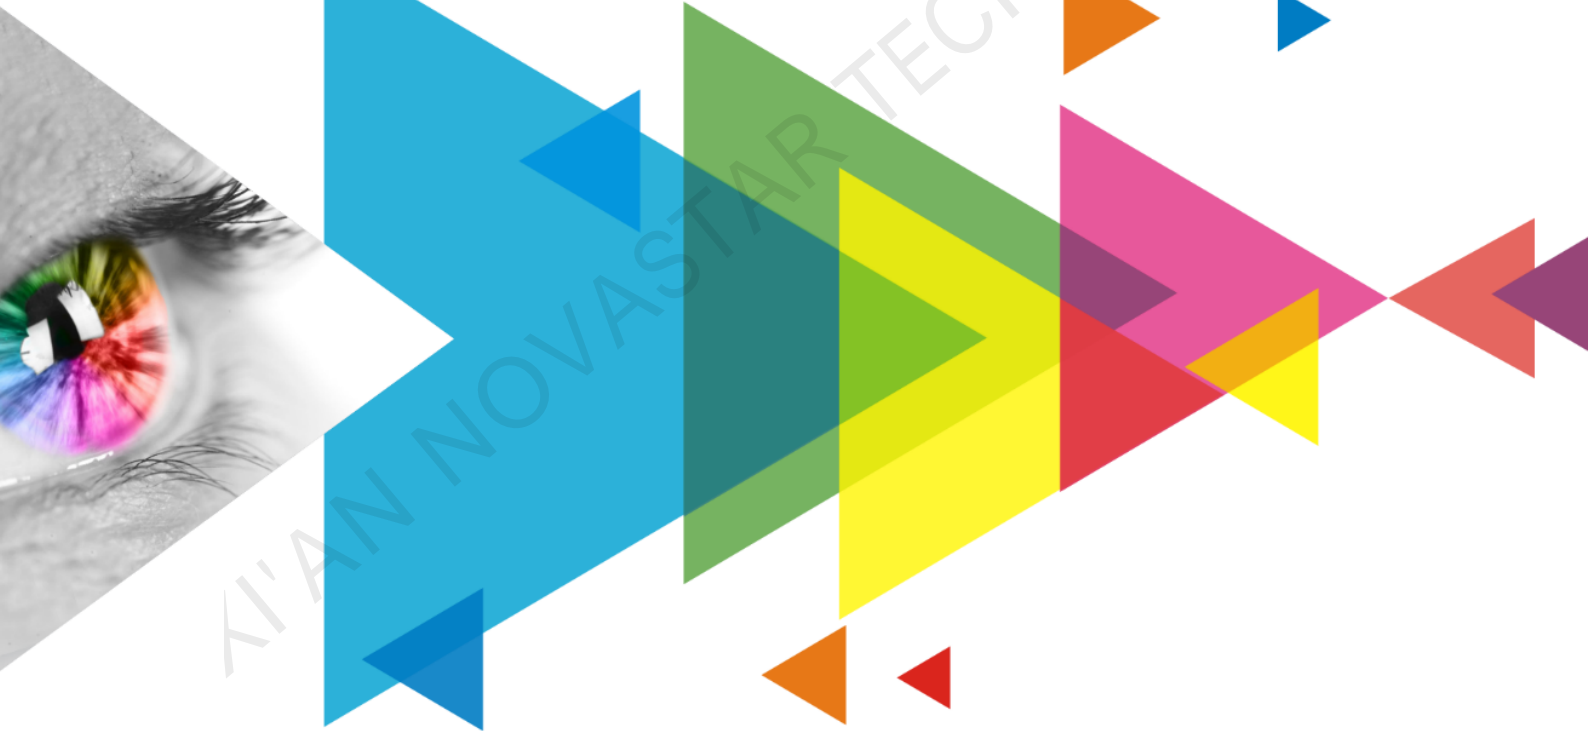

**Specifications**

## Change History

Document Version	Release Date	Description
V1.1.1	2021-07-30	<ul style="list-style-type: none"> <li>Updated the description of features.</li> <li>Added the certification related description.</li> </ul>
V1.1.0	2021-05-15	<ul style="list-style-type: none"> <li>Added the features of color management, 18bit+ and quick uploading of calibration coefficients.</li> <li>Updated the appearance diagram.</li> </ul>
V1.0.0	2021-01-04	First release

## Introduction

The B875 is a receiving card designed for fine-pitch LED displays and features a large loading capacity. A single B875 loads up to 512x512 pixels. Supporting various functions such as pixel level brightness and chroma calibration, quick adjustment of dark or bright lines, 3D, individual Gamma adjustment for RGB, and image rotation in 90° increments, the B875 can significantly improve the display effect and user experience.

The B875 uses eight HUB75E connectors for communication, resulting in high stability. It supports up to 16 groups of parallel RGB data. Thanks to its EMC compliant hardware design, the B875 has improved electromagnetic compatibility and is suitable for various on-site setups.

## Features

### Improvements to Display Effect

- **Color Management**  
Switch the color gamut of the screen between multiple gamuts to enable more precise colors on the screen.
- **18bit+**  
Improve the LED display grayscale by 4 times to avoid grayscale loss due to low brightness and allow for a smoother image.
- **Pixel level brightness and chroma calibration**  
Working with NovaLCT and calibration platform (CalCube MiniLED V1.1.0 or later recommended), the receiving card supports brightness and chroma calibration on each LED, which can effectively remove color discrepancies and greatly improve LED display brightness and chroma consistency, allowing for better image quality.
- **Quick adjustment of dark or bright lines**  
The dark or bright lines caused by splicing of modules and cabinets can be adjusted to improve the visual experience. The adjustment can be easily made and takes effect immediately.
- **3D function**  
Working with the sending card that supports 3D function, the receiving card supports 3D image output.

- **Individual Gamma adjustment for RGB**  
Working with NovaLCT (V5.2.0 or later) and the sending card that supports this function, the receiving card supports individual adjustment of red Gamma, green Gamma and blue Gamma, which can effectively control image non-uniformity under low grayscale and white balance offset, allowing for a more realistic image.
- **Image rotation in 90° increments**  
The display image can be set to rotate in multiples of 90° (0°/90°/180°/270°).

### Improvements to Maintainability

- **Quick uploading of calibration coefficients**  
The calibration coefficients can be quickly uploaded to the receiving card, improving efficiency greatly.
- **Mapping function**  
The cabinets can display the receiving card number and Ethernet port information, allowing users to easily obtain the locations and connection topology of receiving cards.
- **Setting of a pre-stored image in receiving card**  
The image displayed on the screen during startup, or displayed when the Ethernet cable is disconnected or there is no video signal can be customized.
- **Temperature and voltage monitoring**


The receiving card temperature and voltage can be monitored without using peripherals.

- Cabinet LCD  
The LCD module of the cabinet can display the temperature, voltage, single run time and total run time of the receiving card.
- Bit error detection  
The Ethernet port communication quality of the receiving card can be monitored and the number of erroneous packets can be recorded to help troubleshoot network communication problems.  
NovaLCT V5.2.0 or later is required.
- Firmware program readback  
The receiving card firmware program can be read back and saved to the local computer.  
NovaLCT V5.2.0 or later is required.
- Configuration parameter readback  
The receiving card configuration parameters can be read back and saved to the local computer.

### Improvements to Reliability

- Loop backup  
The receiving card and sending card form a loop via the primary and backup line connections. If a fault occurs at a location of the lines, the screen can still display the image normally.
- Dual backup of configuration parameters  
The receiving card configuration parameters are stored in the application area and factory area of the receiving card at the same time. Users usually use the configuration parameters in the application area. If necessary, users can restore the configuration parameters in the factory area to the application area.
- Dual program backup  
Two copies of firmware program are stored in the receiving card at the factory to avoid the problem that the receiving card may get stuck due to program update exception.

### Appearance

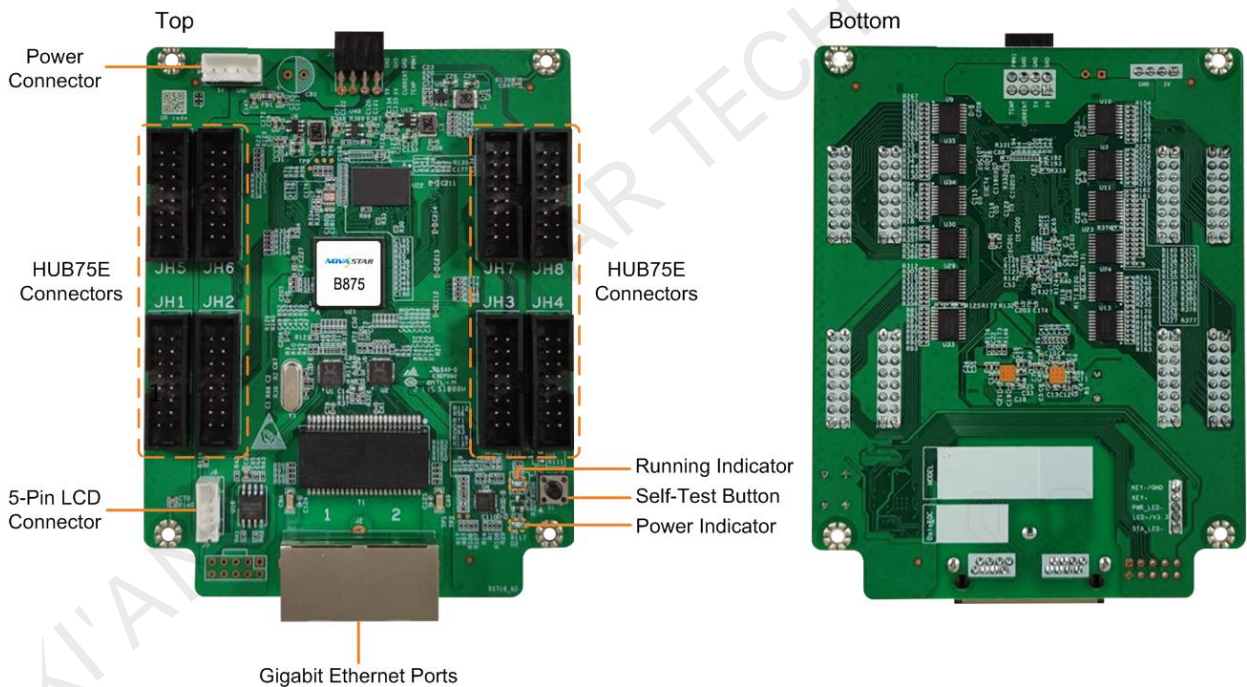

All product pictures shown in this document are for illustration purpose only. Actual product may vary.


### Indicators

Indicator	Color	Status	Description
Running indicator	Green	Flashing once every 1s	The receiving card is functioning normally. Ethernet cable connection is normal, and video source input is available.
		Flashing once every 3s	Ethernet cable connection is abnormal.
		Flashing 3 times every 0.5s	Ethernet cable connection is normal, but no video source input is available.

Indicator	Color	Status	Description
		Flashing once every 0.2s	The receiving card failed to load the program in the application area and is now using the backup program.
		Flashing 8 times every 0.5s	A redundancy switchover occurred on the Ethernet port and the loop backup has taken effect.
Power indicator	Red	Always on	The power supply is normal.

## Dimensions

The board thickness is not greater than 2.0 mm, and the total thickness (board thickness + thickness of components on the top and bottom sides) is not greater than 17.5 mm. Ground connection (GND) is enabled for mounting holes.

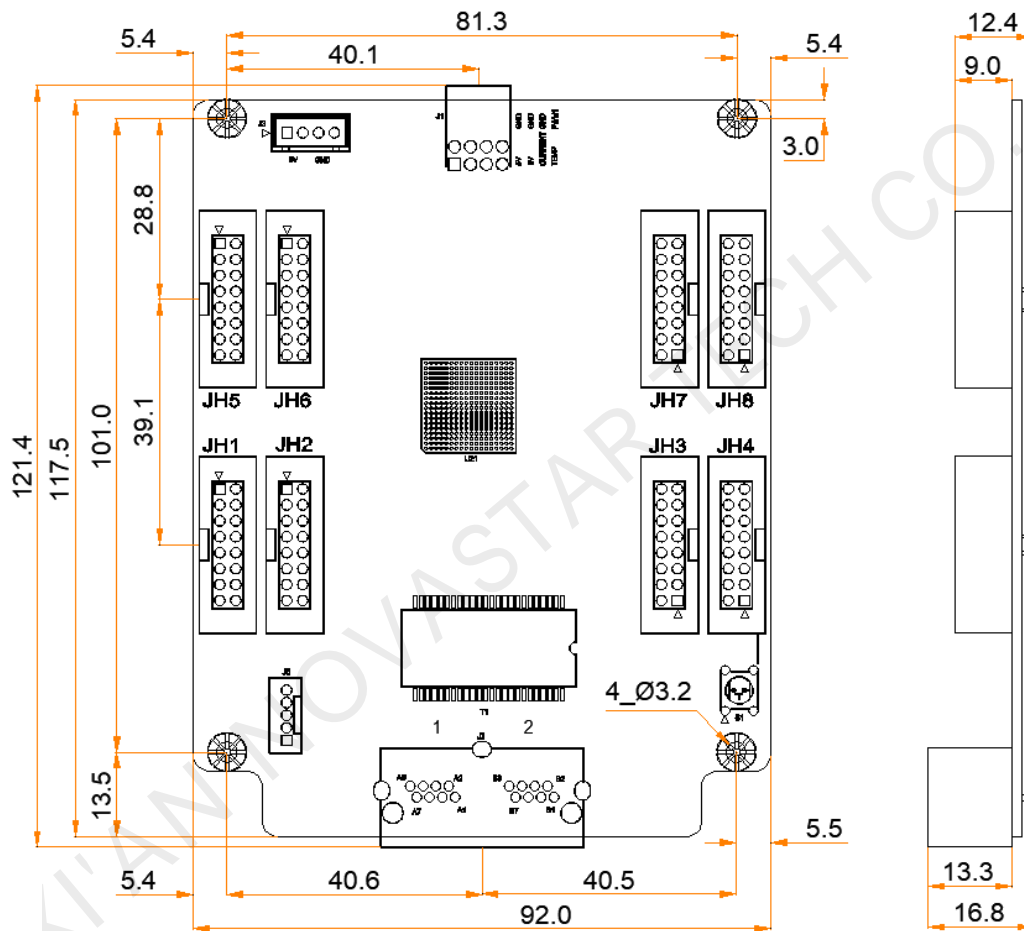

Tolerance ±0.1 Unit: mm

## Pins

JH1		G1	
B1	1	2	GND
B1	3	4	GND
R2	5	6	G2
B2	7	8	HE1
HA1	9	10	HB1
HC1	11	12	HD1
HDCLK1	13	14	HLAT1
HOE1	15	16	GND

PBT-2.54MM H8 8MM DIP

JH2		G3	
B3	1	2	GND
B3	3	4	GND
R4	5	6	G4
B4	7	8	HE15
HA15	9	10	HB15
HC15	11	12	HD15
HDCLK2	13	14	HLAT2
HOE2	15	16	GND

PBT-2.54MM H8 8MM DIP

JH3		G5	
B5	1	2	GND
B5	3	4	GND
R5	5	6	G6
B5	7	8	HE2
HA2	9	10	HB2
HC2	11	12	HD2
HDCLK3	13	14	HLAT3
HOE3	15	16	GND

PBT-2.54MM H8 8MM DIP

JH4		G7	
B7	1	2	GND
B7	3	4	GND
R8	5	6	G8
B8	7	8	HE16
HA16	9	10	HB16
HC16	11	12	HD16
HDCLK4	13	14	HLAT4
HOE4	15	16	GND

PBT-2.54MM H8 8MM DIP

JH5		G27	
R27	1	2	G27
B27	3	4	GND
R28	5	6	G28
B28	7	8	HE9
HA9	9	10	HB9
HC9	11	12	HD9
HDCLK14	13	14	HLAT14
HOE14	15	16	GND

PBT-2.54MM H8 8MM DIP

JH6		G25	
R25	1	2	G25
B25	3	4	GND
R26	5	6	G26
B26	7	8	HE7
HA7	9	10	HB7
HC7	11	12	HD7
HDCLK13	13	14	HLAT13
HOE13	15	16	GND

PBT-2.54MM H8 8MM DIP

JH7		G31	
R31	1	2	G31
B31	3	4	GND
R32	5	6	G32
B32	7	8	HE10
HA10	9	10	HB10
HC10	11	12	HD10
HDCLK16	13	14	HLAT16
HOE16	15	16	GND

PBT-2.54MM H8 8MM DIP

JH8		G29	
R29	1	2	G29
B29	3	4	GND
R30	5	6	G30
B30	7	8	HE8
HA8	9	10	HB8
HC8	11	12	HD8
HDCLK15	13	14	HLAT15
HOE15	15	16	GND

PBT-2.54MM H8 8MM DIP

Pin Definitions					
/	R	1	2	G	/
/	B	3	4	GND	Ground
/	R	5	6	G	/
/	B	7	8	HE	Line decoding signal
Line decoding signal	HA	9	10	HB	Line decoding signal
Line decoding signal	HC	11	12	HD	Line decoding signal
Shift clock	HDCLK	13	14	HLAT	Latch signal
Display enable signal	HOE	15	16	GND	Ground

## Specifications

Maximum Loading Capacity	512×512 pixels	
Electrical Specifications	Input voltage	DC 3.3 V to 5.5 V
	Rated current	0.5 A
	Rated power consumption	2.5 W
Operating Environment	Temperature	−20°C to +70°C
	Humidity	10% RH to 90% RH, non-condensing
Storage Environment	Temperature	−25°C to +125°C
	Humidity	0% RH to 95% RH, non-condensing
Physical Specifications	Dimensions	92.0 mm × 121.4 mm × 16.8 mm
	Net weight	71.2 g Note: It is the weight of a single receiving card only.
	Gross weight	9.2 kg Note: It is the total weight of the products, printed materials and packing materials packed according to the packing specifications.
Packing Information	Packing specifications	An antistatic bag and anti-collision foam are provided for each receiving card. Each packing box contains 100 receiving cards.
	Packing box dimensions	650.0 mm × 500.0 mm × 200.0 mm
Certifications	RoHS, EMC Class A  Note: If the product does not have the relevant certifications required by the countries or regions where it is to be sold, please apply for the certifications yourself or contact NovaStar to apply for them.	

The amount of current and power consumption may vary depending on factors such as product settings, usage, and environment.

**Copyright © 2021 Xi'an NovaStar Tech Co., Ltd. All Rights Reserved.**

No part of this document may be copied, reproduced, extracted or transmitted in any form or by any means without the prior written consent of Xi'an NovaStar Tech Co., Ltd.

**Trademark**

**NOVA STAR** is a trademark of Xi'an NovaStar Tech Co., Ltd.

**Statement**

Thank you for choosing NovaStar's product. This document is intended to help you understand and use the product. For accuracy and reliability, NovaStar may make improvements and/or changes to this document at any time and without notice. If you experience any problems in use or have any suggestions, please contact us via the contact information given in this document. We will do our best to solve any issues, as well as evaluate and implement any suggestions.

[Official website](http://www.novastar.tech)  
www.novastar.tech

[Technical support](mailto:support@novastar.tech)  
support@novastar.tech