


INSTRUCTION MANUAL

2CH Zigbee Dimmer Module

QS-Zigbee-D02-TRIAC-2C-LN




RoHS





TECHNICAL SPECIFICATIONS

Product type	2CH Zigbee dimmer module
Voltage	220-240V AC
Max. load	2X100W
Operation Frequency	2.4-2.484GHz IEEE 802.15.4
Operation temp.	-10°C - +40°C
Protocol	Zigbee 3.0
Operation rang	≤ 200 m
Dims (WxDxH)	46x46x18 mm
IP rating	IP20
Warranty	2 years
Dimming typ	Trailing Edge



Global international operation Whenever & Wherever You are, All-in-one Mobile App




Inhouse local operation



INSTALLATION

▲ Warnings:

1. Installation must be carried out by a qualified electrician in accordance with local regulations.
2. Keep the device out of reach of children.
3. Keep the device away from water, damp or hot environment.
4. Install the device away from strong signal sources such as microwave oven that may cause signal interruption resulted to abnormal operation of the device.
5. Obstruction by concrete wall or metallic materials may reduce the effective operation range of the device and should be avoided.
6. Do NOT attempt to disassemble, repair or modify the device.






MANUAL OVERRIDE

The switch Dimmer terminal reserves the access of manual override function for the end-user to switch on/off, or adjust the light level by push-switch.

- Short Push (<1s): permanent on/off function.
- Long Push (>1s): adjust the brightness level.

Notes:

- 1) Both the adjustment on App and push switch can overwrite each other, the last adjustment remains in memory.
- 2) App control is synchronized with the manual switch.
- 3) The "S" terminals may be left unconnected if no manual control is required.



Wiring Instructions and Diagrams

1. Turn off the power supply before carrying out any electrical installation work.
2. Connect wires according to the wiring diagram.
3. Insert the module into the junction box.
4. Turn on the power supply and follow dimmer module configuration instructions.

FAQ

Q1: What should I do if I can't configure the dimmer module?

- a. Please check whether device is powered on.
- b. Make sure the Zigbee gateway is available.
- c. Whether it's in good internet conditions.
- d. Make sure the password entered in App is correct.
- e. Make sure the wiring is correct.

Q2: What device can be connected to the Zigbee dimmer module?

Triac led light, incandescent lamp or halogen lamp.

Q3: What happens if the WIFI goes off?

You can still control the light connected to the dimmer module with your traditional switch and once WIFI is active again the device connected to the module will connect automatically to your WIFI network.

Q4: What should I do if I change the WIFI network or change the password?

You have to re-connect our Zigbee dimmer module to the new Wi-Fi network accordingly as per the App User Manual.

Q5: How do I reset the device?

Turn off the traditional button switch (the one connected to the Zigbee dimmer module). Then press and hold for 10 seconds or more until the lamp connected to the module flash quickly for pairing.

APP USER MANUAL



iOS APP / Android APP

1

Scan the QR code to download Tuya Smart App, or you can also search keyword "Tuya Smart" at App Store or Googleplay to download App.



2


Log in or register your account with your mobile number or e-mail address. Type in the verification code sent to your mobile or mail box, then set your login password. Click "Create Family" to enter into the APP.



3

Open the control panel of the ZigBee gateway on the App


Before making the reset operation, pls make sure the Zigbee Gateway is added and installed to the WIFI network. Ensure that the product is within the range of Zigbee Gateway Network.



4


Zigbee Gateway

Turn off the traditional button switch(the one connected to the Zigbee dimmer module). Then press and hold for 10 seconds or more until the lamp connected to the module flash quickly for pairing.(If you wait more than 120 seconds you need to repeat this passage)




5

Click "+" (Add sub-device) to select the suitable product gateway and follow the on-screen instruction for pairing.

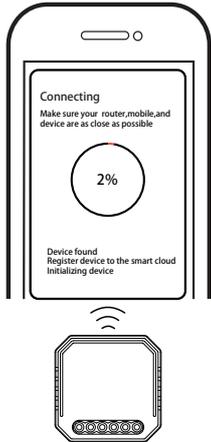


6

The pairing will take about 10-120 seconds to complete depending on your network condition.



7

When pairing is done, the ZigBee Dimmer will be shown on the App.

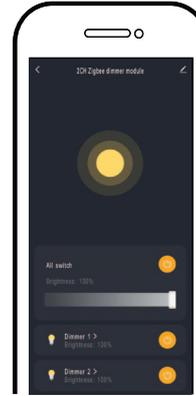

8

Finally, you can control the device via your mobile phone.

SYSTEM REQUIREMENTS

- WIFI Router
- ZigBee gateway
- iPhone, iPad (iOS 7.0 or higher)
- Android 4.0 or higher

