


Portable Power Station

User Manual

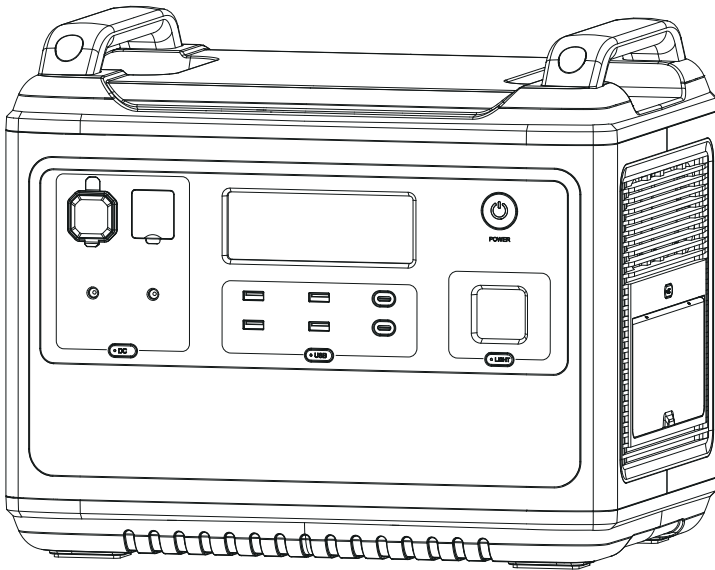

Thank you very much for purchasing 2000W power station. Be sure to read this manual carefully before using the product in order to use the product correctly. This manual is needed for product after-sales service. Please keep this manual together with the invoice and other purchase certificates.

In order to ensure the safety of this product during transportation, this product is only charged about 30% when it is packaged. Please recharge when you get the product.

The product can be charged directly by the wall socket, please do not use extension cords and cable taps.

When the product is charging, do not plug other products in the same socket.








Warning

1. Please avoid using the product near high temperature, high humidity, direct sun environment and fire place.
2. Do not disassemble or modify this product, it will cause malfunction and fire.
3. Please discard or recycle the product according to the methods prescribed by local laws.
4. Be careful not to drop the product from a high place and give the product a strong impact.
5. Keep or use the product in a place out of the reach of children.
6. Please use our company's genuine accessories. The damage caused by the use of non-genuine accessories cannot be repaired free of charge.
7. Please leave a space of about 30cm away from the side suction and exhaust ports, so as not to affect the heat dissipation of the product.
8. When not using this product, please turn off the power and unplug the power cord. Please avoid storing the product in a place exposed to direct sunlight with high temperature and humidity.
9. For long-term storage, please consume power from full power to no power once every 3 months, and then recharge to about 50%.
10. Please do not use this product and its accessory cables and connecting equipment when there is a defect.
11. Please do not store the product for a long time in extremely high and low temperature places such as in the car and in the field warehouse to avoid shortening the battery life.




Content

AC Output Parameter	1
Packing List	2
Product introduction	2
Display icon introduce	6
UPS mode	7
Solar panel connection	8
Car charging	9
Specifications	10
Battery specification	10
Fault resolution	11
Warranty Card	12

AC Output Parameter

Type of AC port	AC output
 US/JP	100V~120V 50/60Hz
 CH	220V 50Hz
 UK	220V~240V 50/60Hz
 EU	220V~240V 50/60Hz
 KR	220V 60Hz

Packing List



Power Station AC Charger Anderson to MC4 User Manual

Product introduction


This product is a 1997Wh large capacity 2000W high power, 2 hours of high-speed charging portable energy storage power supply, using high safety performance of LiFePo4 battery.

It can be used as a backup power supply in case of emergency power cut, disaster, camping and vehicles, and can also provide power for various electric tools.


2000W high power, pure sine wave AC output, can be used for household appliances such as dryers, microwave ovens, refrigerators, high-power induction cookers and it can also be used for other electronic devices such as personal computers.

Through the 1100W ultra-fast charging, this model can be fully charged within 2 hours, The AC input/output voltage frequency can be automatic or manually switched between 50Hz/60Hz. This product also supports maximum 500W solar charge, allow you to charge even when the power cut or in outdoor situations.



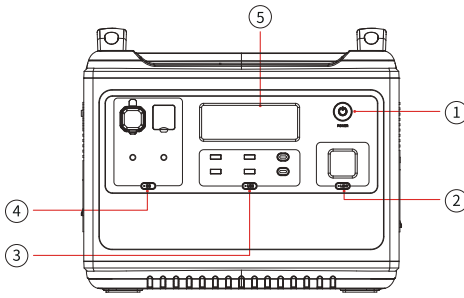

- ① Main power control
- ② Light control
- ③ USB control
- ④ DC control
- ⑤ LCD display

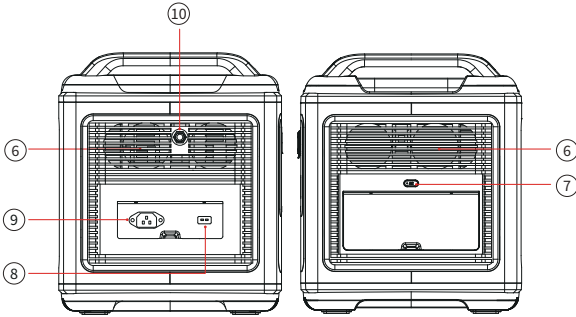

- ⑥ Air intake/outlet
- ⑦ AC on/off control(50Hz/60Hz switching control)
- ⑧ Anderson input port(for solar panel)
- ⑨ AC input port
- ⑩ Overload protection

① Main Power Control

Main Control for the whole system turn on/off.

Operate method: long press the button for 3s to turn on/off the system.




② LED light control

Operate method: short press to turn on and change the light mode (SOS/Flash).

Notice: you can turn off the light by long press the button(1-2s) in any mode.

③ USB button

Operate method: short press to turn on/off.

		
USB-A × 2	USB-A × 2	TYPE-C × 2
5V/2.4A	QC3.0-18W	PD-100W

④ DC button

Operate method:short press to turn on/off.

 Output × 2 12V/3A	 Cigar Lighter × 1 12V/10A	 XT60 × 1 12V/25A
---	---	--

⑤ LCD display

Present the remaining power and using data.

⑥ Cooling system

When the fans are working, please don't block the channel.

⑦ AC button(AC output, total share 2000W)

Operate method:short press to turn on/off.

Notice: 1.Please confirm the output voltage or frequency before using

2.Long press the button for 2s to entry the frequency changing mode, 50Hz and 60Hz will blink in the display, press again the button to chose the right frequency, wait till the frequency is not blinking, then you will get the frequency you want.

3.Quick short press for 10 times to switch the voltage .

⑧ Solar panel input

Use the included Anderson→MC4 conversion cable to connect the solar panel.

- 1.Solar panels can have a maximum input of 500W and a maximum voltage of 50V.
- 2.If exceeding the maximum voltage leads to equipment damage, it is beyond the scope of warranty.

⑨ AC Input

Use wall socket to get 1100W fast charging, which can full charge from 0 to 100% in 2 hours.

- ※The product can be charged directly by the wall socket, please do not use extension cords and cable taps. When the product is charging, do not plug other products in the same socket.
- ※Please do not plug several devices together in a extension socket at once, the current will be to high and bring damage to the cable and fire risk.
- ※Do not use the same socket to connect other devices when charging this product. When the same wiring in a general household exceeds 1500W, The safety circuit breaker will be activated.


⑩ Overload protector

To protect this product, an overload protector is added. Prevent damage to the product due to excessive AC input current caused by lightning and power grid fluctuations. When such a situation occurs, the overload protector will start to cut off the AC input to protect the product.

Restore the AC input function of the product in the following sequence.

1. Turn off the power button and unplug all ports.
2. After confirming that all parts are normal, turn on the power button.
3. Press the overload protection button to switch on the AC line to restore AC input.

Display icon introduce

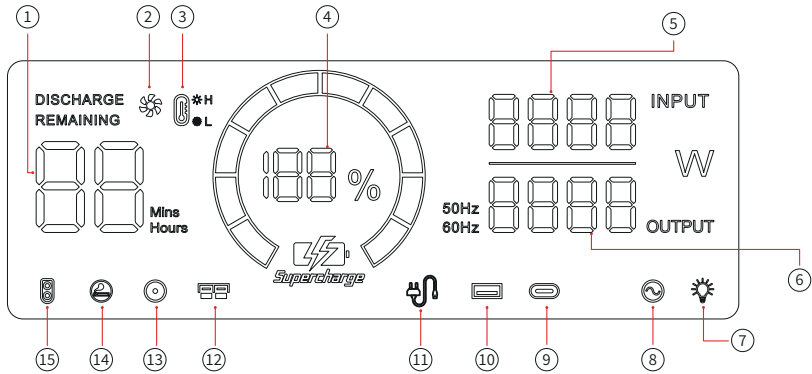

- | | | | |
|-----------------------------------|----------------------|---------------------|------------------------|
| ① Charging/using time | ⑤ Total input power | ⑨ Type-c output | ⑬ DC output |
| ② Fan state | ⑥ Total output power | ⑩ USB output | ⑭ Cigar lighter output |
| ③ High/low temperature protection | ⑦ LED light | ⑪ AC charging | ⑮ XT-60 output |
| ④ Power percentage | ⑧ AC output | ⑫ Anderson charging | |

Display Attention



When this icon light up. Please keep Air intake/outlet unobstructed.



When this icon light up. Please note the device is now with high/low temperature and will possibly stop working till the temperature back to normal standard.



When this icon is blinking, represent that the AC input is fault, please recheck(Power/Hz/cable).



When the icon is blinking, represent the output is fault, please recheck.

UPS mode

• UPS function

This product has the bypass mode, does not need to pass through the battery, can directly output from the AC.

In UPS mode, when the AC input power of the mains is cut off due to a power outage, the ac input power of the mains can be used in about automatic switch to product battery power within 10 ms to ensure AC output.


• UPS Connections

As shown in the figure below, connect the product between the socket on the wall and the electrical appliances, and the power of the product is in the ON state. When you turn on the power of the electrical appliances, it will directly use the AC power of the power grid.

In this state, when the power grid is cut off, it will automatically switch to the product's internal battery to supply power.

※In UPS mode of The United States and Japan, the maximum power output of AC is below 1100W, and the AC output exceeds 1100W. The AC output icon "⊙" blinks indicating overload.

※In UPS mode of the China, United Kingdom, Europe and South Korea, AC output of the maximum power below 2000W, AC output over 2000W, "⊙" AC output icon flashes indicating overload.

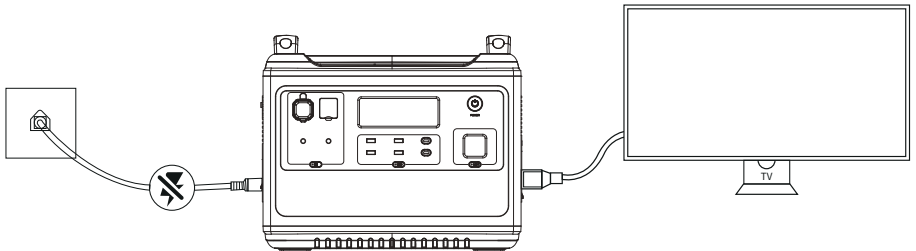

Solar panel connection

Our products can be connected to solar panels and can be charged through solar panels.

The solar panels produce 400 watts of power and can be fully charged in as little as five hours. (Solar panel input can be the most maximum 500W(maximum voltage 50V).


※Solar panel charging power, according to the weather and climate conditions.

※Solar panel voltage exceeding 50V will damage the equipment and may not be covered by warranty.

● By solar panels


Connecting Pattern①

The area of charging

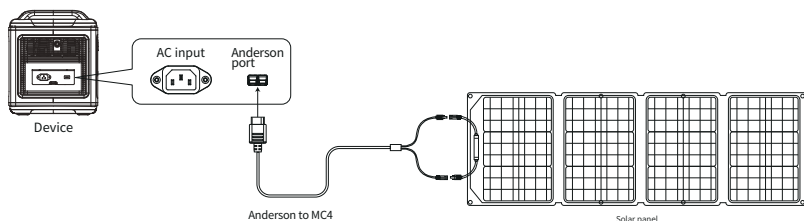

Connecting Pattern②

The area of charging

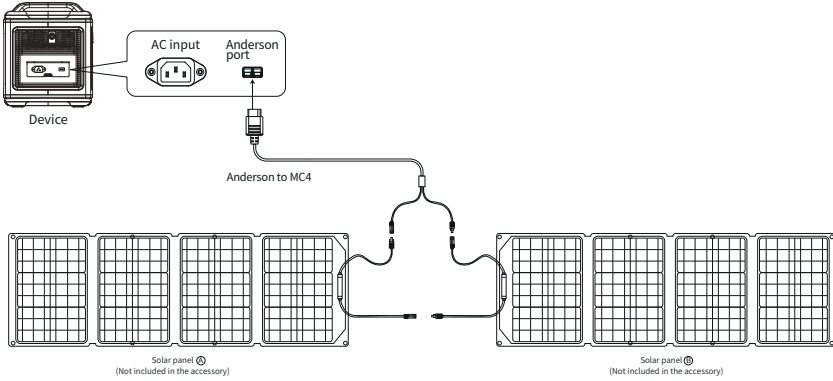


Car charging

This product can be charged by the cigarette lighter in the car with an ACC cable (accessory: ACC hereinafter).

Turn on the power of this product, connect the ACC charging cable to the cigarette lighter in the car and the Anderson interface on the side of the product, turn on the engine of the car, and the LED of this product will show the input power.

- ※ On-board charging should be carried out with the car engine turned on. If the engine is not turned on, the battery might run out.
- ※ Car charging is usually low power of 90-120W, and the charging time will be long. If you need quick charge, it is recommended to use the mains.

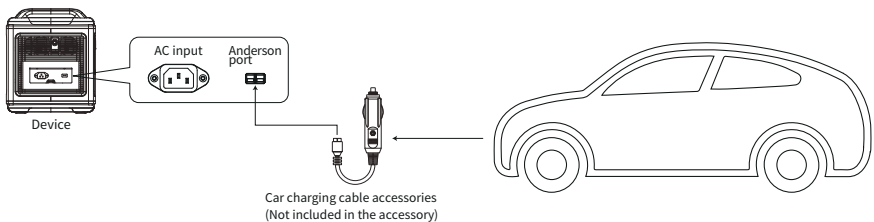




Specifications

Product name	2000W Portable Power station
Product size	L*W*H=392*279*323mm
Product weight	22.0kg
Capacity	1997Wh
AC Charging	50/60Hz 1100W max
MPPT input	11.5-50V 20A 500W max
AC output	AC output : 50/60Hz(frequency switch available), rated 2000W, 4000W peak pure sine wave. Built-in overload and short circuit protection.
USB QC3.0	18Wx2
USB	USB-A (5V 2.4A) x2
Type-C	5-20V/5.0A,100W max(PD3.0).
DC 5521	12V/3A x 2
XT-60 output	12V/25A
Cigar lighter output	12V/10A
Power off current	<500uA
Operating temperature	-10~40°C
Environment humidity	≤90%RH

Battery specification

Battery type	32130 LiFePo4
Single cell rated voltage	3.2V
Single cell rated capacity	13Ah
Battery pack rated voltage	51.2V
Battery pack output voltage	43.2-57.6V
Battery pack rated capacity	1997Wh

Fault resolution

Status	Explanation	Recover method
 <p>Above icon flashes and buzzes.</p>	<p>output exceeds standard, short circuit.</p>	<ol style="list-style-type: none"> 1. Remove the load. 2. Check whether the overload protector is up. If it is up, press the overload protection button is pressed, press the AC output button. 3. If the overload protector does not spring up, directly press AC output Restore output function.
 <p>The temperature warning icon flashes and buzzes.</p>	<p>The temperature of this product has exceeded the appropriate temperature.</p>	<p>Remove the equipment, turn off the power of this product, and wait for the equipment to reach the appropriate temperature.</p>
 <p>Charging unavailable.</p>	<p>Bad wire connection.</p>	<p>Confirm the connection status of the line and the power supply status.</p>

If you have any questions, please feel free to contact us.

Email address: support@afery.com.

Sincerely,

Warranty Card

Warranty Card	
Model	
Name	
Address	
Tel	
Mail	
Name of the store	
Buying date	
Please fill in all the above items.	

This product provides a 24-month warranty service from the date of purchase

- If there is a quality problem within the range of normal use, we provide warranty service.
- After purchasing our company' s products, please keep this product together with invoices and other items. When maintenance services are needed, please provide information according to our company' s request.
- In the case where the warranty is damaged or altered, and no stamp of the sales store on the warranty, the warranty service may not be provided.
- Damage caused by use beyond the normal range of use is not covered by the warranty service.
- The content of the warranty scope shall be subject to the content recognized by the company.
- Even within the scope of the warranty, sometimes it will be exchanged for products with the same function. The shipping and repair fees for products outside the warranty range shall be paid by the customer.
- Sometimes the specifications and functions of the product will be updated without prior notice.

