

Product specifications

LCD Android Motherboard

HD-972S

V1.0

Contents

Chapter 1. Product Overview	3
1. Overview	3
2. Product Features.....	4
Chapter 2. Product Specifications	5
1. Basic Parameters.....	5
1. Hardware Parameters	5
2. Software Parameters.....	6
2. Product Size Specification	7
3. Schematic Diagram of Product Interface.....	8
4. Interface Parameter Description	8
1. Power Interface Description	8
2. MIC (Microphone) Interface Description.....	9
3. LED/IR (remote control) Interface Definition.....	9
4. LVDS BL (LVDS Backlight) Interface Description	9
5. LVDS Interface Description	10
6. V-By-One Interface Description	11
7. USB Interface Description	12
8. SPK (amplifier) Interface Description.....	13
9. L/R(audio) Interface Description	13
10. GPIO Interface Description	13
11. UART (serial port) Interface Description.....	14
12. DEBUG Interface Description	14
13. 4PIN RJ45 (Ethernet) Interface Description	15
14. CTP Interface Description	15
15. KEY Interface Description.....	15
16. Other Interface Description	16
Chapter 3 Communication Methods.....	17
1. Wi-Fi Update Program	17
2. U-disk update program.....	17
3. TF Card Update Program	18
4. Ethernet cable to Update	18
5. Internet Update.....	19
Chapter 4. Attachment: Product Appearance.....	20

Chapter 1. Product Overview

1. Overview

HD-972S it is a well-built all-in-one motherboard, adopting Amlogic T972 quad core Cortex-A55 processor, equipped Android 9.0 system, the main frequency can reach up to 1.9 GHz, with super performance. Use Mali-G31 GPU, support AFBC (frame buffering from compression), 4K, H.265 hard decoding, 1080P video decoding, V-By-One interface 4K output, 4K level video playback. Support infrared remote control, Wi-Fi, RJ45 and so on. It is widely used in intelligent control fields such as advertising machines, interactive all-in-one machines, security, medical care, transportation, finance, industrial control, etc., which can accelerate the product development cycle. Due to its hardware platform, Android, Intelligent features can be used on the main board of the intelligent terminal when human-computer interaction and network device interaction are required, which can be your best choice.

HD-972S Standard 2.4GHz frequency Wi-Fi Module (subsequent optional 5GHz frequency), support Bluetooth 4.2

2. Product Features

- High performance. T972 Chip with quad core ARM Cortex-A55 architecture, the main frequency can reach up to 1.9GHz, compared with the common single-core, dual-core, and quad-core solutions on the market. It has a qualitative leap in performance, can play high-definition video in various formats, and can handle complex interactive operations.
- High stability. T972 Android integrated board, in terms of hardware and software, adds its own unique technology to ensure the stability of the product, which can make the final product reach 7*24 unattended hours.
- High integration. T972 Android integrated board integrates Ethernet, V-By-One, Wi-Fi, Amplifier, TF Expansion Card, USB expansion port, IR remote control function, CTP, HDMI-IN, LVDS, backlight control, microphone and other functions, which greatly simplifies the design of the whole machine.
- High scalability. 5 USB ports (3 pins, 2 standard), 3 serial ports (UART1 Adjustable by hardware RS485, UART2 Adjustable by hardware RS232, MCU_UART serial port with MCU Burning port shared) +1 channel expandable debug serial port, 5 IO expansion port can expand more peripheral devices.
- High definition. Support various V-By-One, LVDS interface LCD display screen, supports cropping screens of various sizes and resolutions.
- Perfectly supports multi-point infrared touch, multi-point capacitive touch, multi-point nano-film touch, multi-point acoustic wave touch, multi-point optical touch.

Chapter 2. Product Specifications

1. Basic Parameters

1. Hardware Parameters

Hardware Specifications	
CPU	T972, Quad-core, Up to 1.9GHz, Android 9.0
GPU	Mali-G31 GPU Quad-core GPU
Memory	LPDDR4, Standard 2GB
Built-in storage capacity	eMMC Standard 16GB TF Card extension (available for extension SSD)
Network	Support RJ45 R/A Fast Ethernet Support Ethernet; Support 2.4GHz Wi-Fi; Optional 5GHz; Support Wi-Fi 802.11b/g/n Protocol; Support Bluetooth 4.2
Display interface	1 channel LVDS port, support 1080P output, adapt 3.3V/5V/12V powered 1 channel V-By-One port, support 4K output. 2 pcs HDMI IN ports, support 4K input
Image rotation	Support 0°, 90°, 180°, 270° or manual rotation, optional gravity sensor module to achieve automatic rotation.
Audio	Support standard left and right channel line output; support 3.5mm audio output interface.
Amplifier	2 pcs output (8 Europe 5 watts dual studio amplifier output)
Microphone	Difference MIC input
Touch screen	Support USB Multi-point infrared touch, multi-point nano-film touch, multi-point acoustic wave touch, multi-point optical touch and so on.
RTC	Built-in real-time clock function
USB	1 piece USB-2.0 HOST, 1 piece USB2.0 OTG, 3 pcs USB ports (One of them is shared with 4G module).
Infrared	Infrared receiver, support infrared remote control function
LED	1* Power Status LED (green), 1* System LED (green, blinking by default)
Button	1*Upgrade Button
Serial port	3 serial ports (UART1 can adjust RS485 through hardware, UART2 can adjust RS232 through hardware, MCU_UART serial port is shared)


	with MCU programming port), 1 channel DEBUG
GPIO	5-way IO input and output control, can do key scanning control
KEY	Support power on/off function, reserved reset, ADC function
Power adapter	Input: AC100-240V.50-60HZ, Output: DC12V 1.5A (Requires surge voltage less than 18V, ripple voltage less than 100mV)
Storage humidity	10%~90%, no condensation
Storage temperature	-40°C~70°C
Operating temperature	-20°C~70°C

2. Software Parameters


Software Specifications	
Operating System	Android 9.0
Audio	MP3, WMA, WAV, APE, FLAC, AAC, OGG, M4A, 3GPP and other formats
Video	Support H.265, H.264, VP8, MAV, WMV, AVS, H.263, MPEG4 and other video formats
Image	Support various image formats such as JPG, BMP, PNG
System Comes with Application Software	APK Installer, Email, Calculator, Browser, Recorder, Calendar, Settings, Clock, Video Player, Search, Contacts, Gallery, Download, Camera, Music, Explorer, etc.
Language	support multi-language
Input	Standard Android keyboard with optional third-party input method
System Management	Original ecological Android system, open root permissions, and can customize product development
	Real-time remote monitoring, system crash self-recovery, unattended 7 * 24 hours
	Support OTA remote upgrade; support U-disk upgrade
	Support boot animation definition
	Support server / stand-alone mode switching
Support Wi-Fi hotspot	
System Watchdog	Support hard watchdog and software watchdog

2. Product Size Specification

1. Bare Board Dimensions

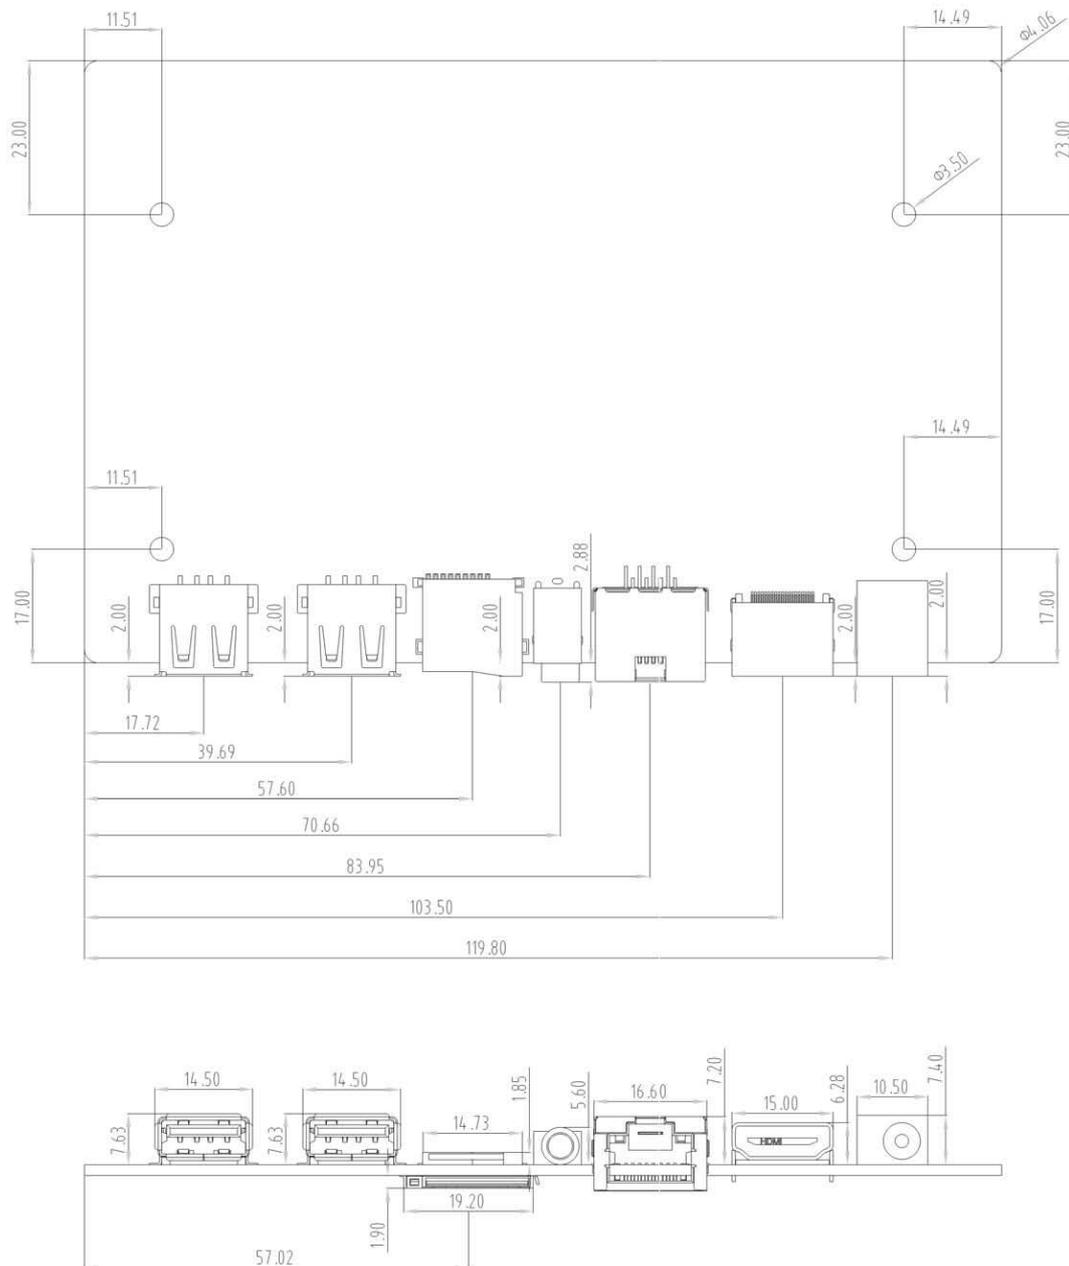

3. Schematic Diagram of Product Interface

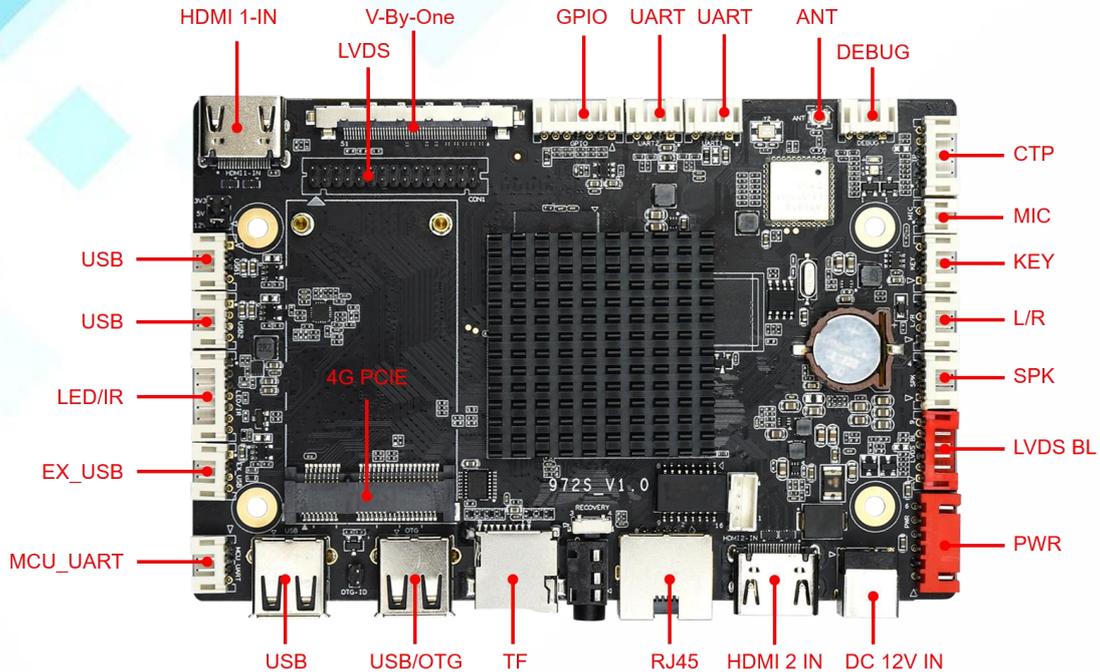

4. Interface Parameter Description

1. Power Interface Description

Powered by 12V DC power supply, the board subsystem is only allowed to supply power from the DC socket and power socket.



Serial number	Definition	Attributes	Describe
6	12V	input	12V input
5	12V	input	12V input
4	GND	ground wire	ground wire
3	GND	ground wire	ground wire
2	5VS	input	stand by 5V input
1	STB	output	stand by signal output

2. MIC (Microphone) Interface Description




Serial number	Definition	Attributes	Describe
1	MIC-P	input	MIC + input
2	MIC-N	input	MIC-input

3. LED/IR (remote control) Interface Definition



Serial number	Definition	Attributes	Describe
1	RED	output	red indicator
2	3V3	power supply	3.3V output
3	GRN	output	green indicator
4	IO	output	remote control signal output
5	IR	input	remote control signal input
6	GND	ground wire	ground wire
7	3V3	power supply	3.3V output

4. LVDS BL (LVDS Backlight) Interface Description



Serial number	Definition	Attributes	Describe
1	GND	ground wire	ground wire
2	GND	ground wire	ground wire
3	ADJ	output	backlight brightness control
4	EN	output	backlight brightness control
5	12V	power supply	12V output
6	12V	power supply	12V output

5. LVDS Interface Description



General LVDS interface definition, support single/dual, 6/8/10-bit 1080P LVDS screen. The screen voltage can be selected through the jumper cap, and the screen power supply can be selected to support 3.3V/5V/12V.

In order to avoid burning the board and screen, please pay attention to the following:

1. Please confirm whether the screen power supply voltage is correct, and whether the corresponding power supply of the board can meet the maximum current of the screen.
2. 1. Please use a multimeter to confirm whether the power supply selected by the jumper cap is correct.
3. When connecting the screen cable of 6/8-bit LVDS screen, close to the pin1 end to connect and install.

Serial number	Definition	Attributes	Describe
1	VCC	power supply	3.3V/5V/12V optional output
2	VCC		
3	VCC		
4	GND	ground wire	ground wire
5	GND	ground wire	ground wire
6	GND	ground wire	ground wire
7	RX00-	output	Odd 0-
8	RX00+	output	Odd 0+
9	RX01-	output	Odd 1-
10	RX01+	output	Odd 1+
11	RX02-	output	Odd 2-

12	RXO2+	output	Odd 2+
13	GND	ground wire	ground wire
14	GND	ground wire	ground wire
15	RXOC-	output	Odd Clock-
16	RXOC+	output	Odd Clock+
17	RXO3-	output	Odd 3-
18	RXO3+	output	Odd 3+
19	RXE0-	output	Even 0-
20	RXE0+	output	Even 0+
21	RXE1-	output	Even 1-
22	RXE1+	output	Even 1+
23	RXE2-	output	Even 2-
24	RXE2+	output	Even 2+
25	GND	ground wire	ground wire
26	GND	ground wire	ground wire
27	RXEC-	output	Even Clock-
28	RXEC+	output	Even Clock+
29	RXE3-	output	Even 3-
30	RXE3+	output	Even 3+


6. V-By-One Interface Description



Serial number	Definition	Attributes	Describe
1	GND	ground wire	ground wire
2	VBX-7P	output	Pixel0 Positive Data
3	VBX-7N	output	Pixel0 Negative Data
4	GND	ground wire	ground wire
5	VBX-6P	output	Pixel1 Positive Data
6	VBX-6N	output	Pixel1 Negative Data
7	GND	ground wire	ground wire
8	VBX-5P	output	Pixel2 Positive Data
9	VBX-5N	output	Pixel2 Negative Data
10	GND	ground wire	ground wire
11	VBX-4P	output	Pixel3 Positive Data
12	VBX-4N	output	Pixel3 Negative Data
13	GND	ground wire	ground wire

14	VBX-3P	output	Pixel4 Positive Data
15	VBX-3N	output	Pixel4 Negative Data
16	GND	ground wire	ground wire
17	VBX-2P	output	Pixel5 Positive Data
18	VBX-2N	output	Pixel5 Negative Data
19	GND	ground wire	ground wire
20	VBX-1P	output	Pixel6 Positive Data
21	VBX-1N	output	Pixel6 Negative Data
22	GND	ground wire	ground wire
23	VBX-0P	output	Pixel7 Positive Data
24	VBX-0N	output	Pixel7 Negative Data
25	GND	ground wire	ground wire
26	LOCKN-OUT	output	CLOCK
27	HTPDN	output	TCON
28	SEL		TCON
29	AGP		TCON
30	SCN-EN		TCON

7. USB Interface Description

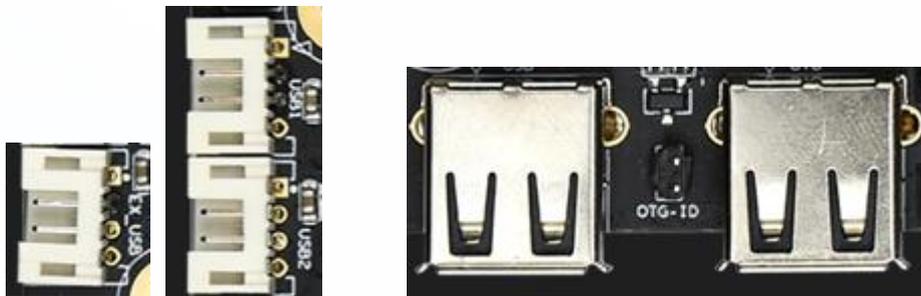

The board has 2 USB standard interfaces and 3 USB pins, one of which is shared with the 4G module.

USB ports

Serial number	Definition	Attributes	Describe
1	5VS	power supply	5V output
2	DM	input/output	DM
3	DP	input/output	DP
4	GND	ground wire	ground wire

8. SPK (amplifier) Interface Description



Definition	Definition	Attributes	Describe
1	OUTP-R	output	right channel+
2	OUTN-R	output	right channel-
3	OUTN-L	output	left channel-
4	OUTP-L	output	left channel+

9. L/R(audio) Interface Description



Serial number	Definition	Attributes	Describe
1	LO-L	output	left channel
2	LO-R	output	right channel
3	GND	ground wire	ground wire
4	NC	NC	undefined

10. GPIO Interface Description



Serial number	Definition	Attributes	Describe
1	GND	ground wire	ground wire
2	K5	K5	K5
3	K4	K4	K4
4	K3	K3	K3

5	K2	K2	K2
6	K1	K1	K1
7	3V3	power supply	3.3V output

11. UART (serial port) Interface Description



The board leads out two groups of common UART serial ports, which can support common UART serial port devices on the market.

Tips:

1. Whether the serial port voltage matches. Cannot directly access RS232, RS485 serial device.
2. Whether the connection of TX and RX is correct.。

Serial number	Definition	Attributes	Describe
1	VCC	power supply	3.3V output, optional 5V
2	TX	output	TX
3	RX	input	RX
4	GND	ground wire	ground wire

1. UART1 can be adjusted by hardware RS485
2. UART2 can be adjusted by hardware RS232
3. MCU_UART serial port is shared with MCU programming port

12. DEBUG Interface Description



Serial number	Definition	Attributes	Describe
1	3V3	power supply	3.3V output
2	TX	output	TX
3	RX	input	RX
4	GND	ground wire	ground wire

13. 4PIN RJ45 (Ethernet) Interface Description



Serial number	Definition	Attributes	Describe
1	TXP	output	output+
2	TXN	output	output-
3	RXP	input	input+
4	RXN	input	input-

14. CTP Interface Description



Serial number	Definition	Attributes	Describe
1	3V3	power supply	3.3V output
2	SCL	input/output	I2C clock
3	SDA	input/output	I2C data
4	INT	input/output	interrupt
5	RST	input/output	reset
6	GND	ground wire	ground wire

15. KEY Interface Description

Serial number	Definition	Attributes	Describe
1	PWRON	switch	power on, power off
2	RESET	reset signal	reset signal interface
3	ADC	ADC	ADC


4	GND	ground wire	ground wire
---	-----	-------------	-------------

16. Other Interface Description


Storage interface	TF card	data storage, maximum support 256G
	USB	HOST interface, support data storage, data import, USB mouse and keyboard, camera, touch screen, etc.
Ethernet interface	RJ45 interface	support 100M wired network
HDMI IN interface	standard interface	support HDMI input, up to 1080P
3G/4G	PCI-E standard interface	all kinds support
SIM card interface	standard interface	support various formats (depending on 4G module)

Chapter 3 Communication Methods


1. Wi-Fi Update Program

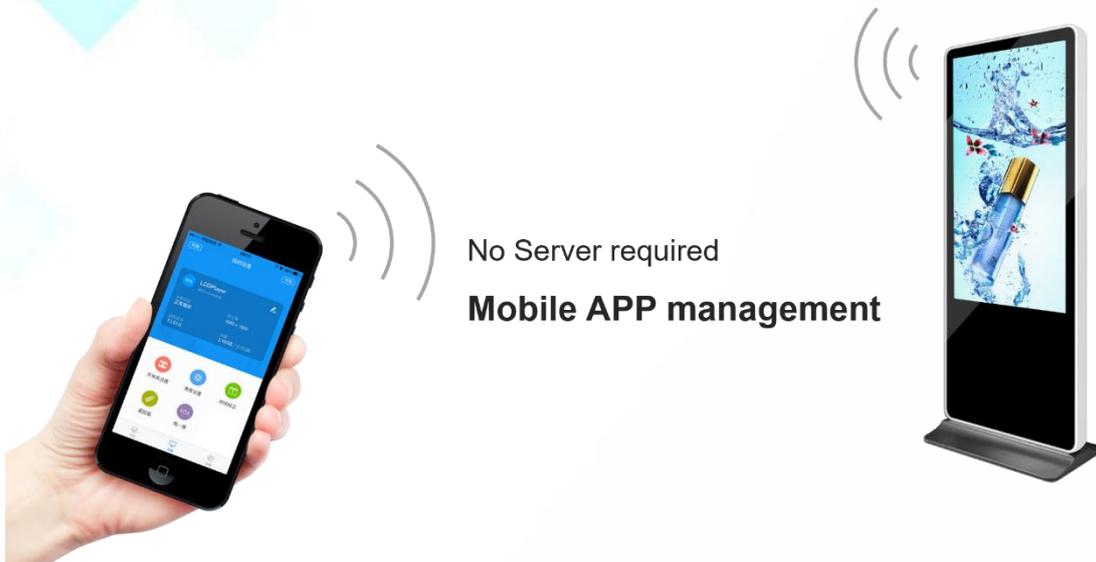


2. U-disk update program

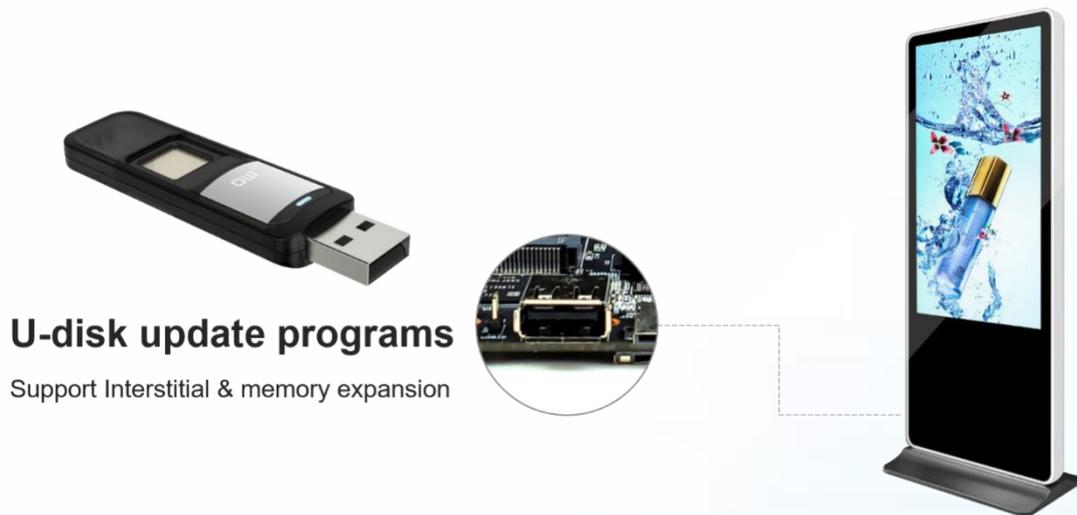

3. TF Card Update Program

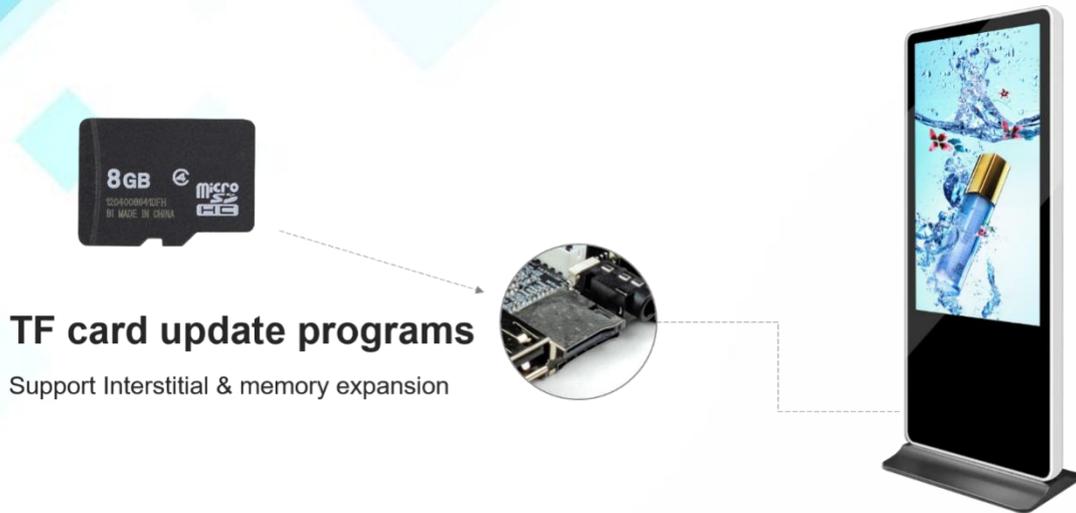


4. Ethernet cable to Update

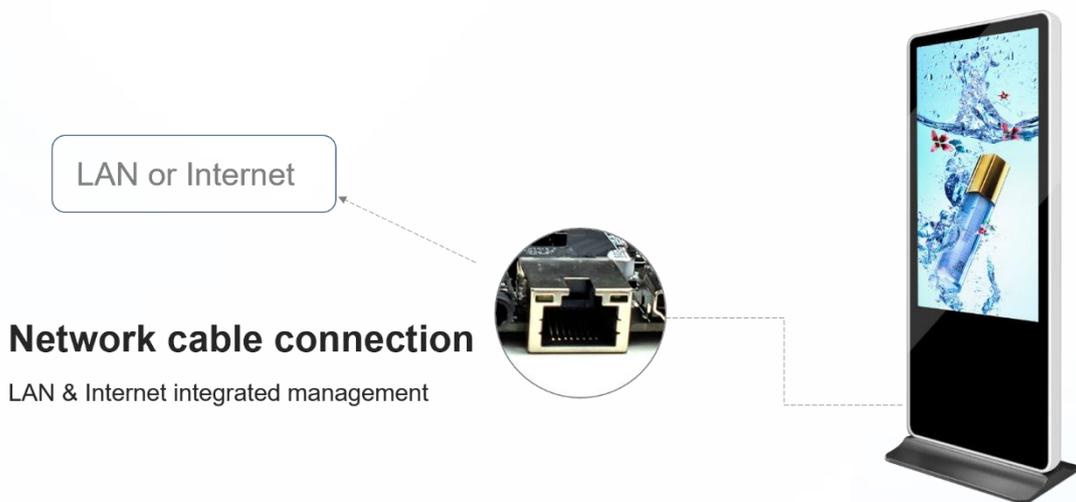



5. Internet Update



Internet remote management

Anytime & anywhere operation available

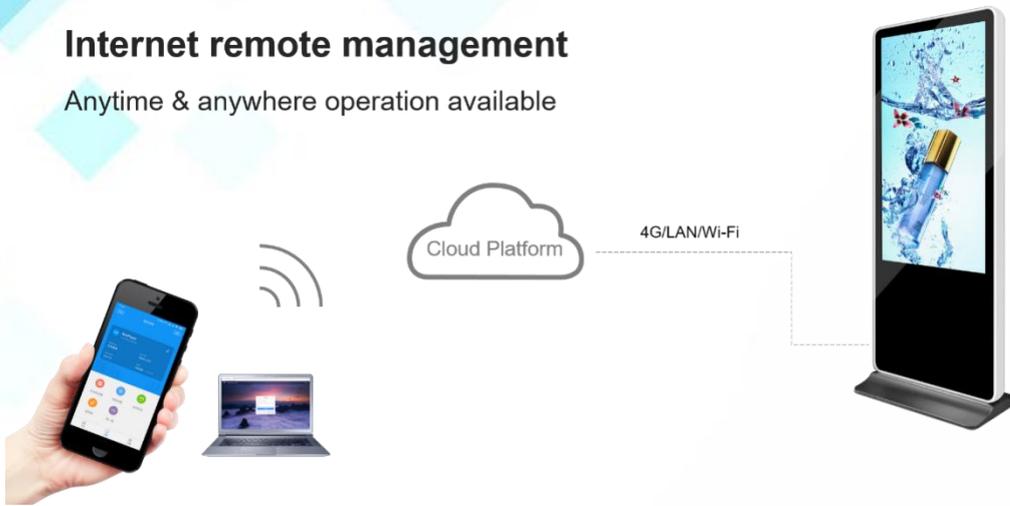

Chapter 4. Attachment: Product Appearance

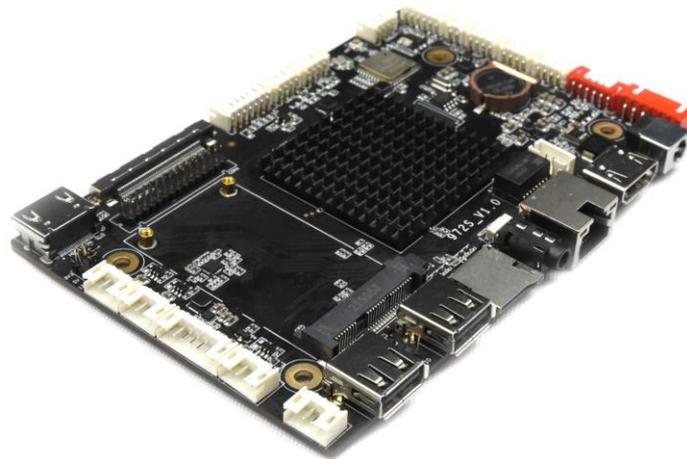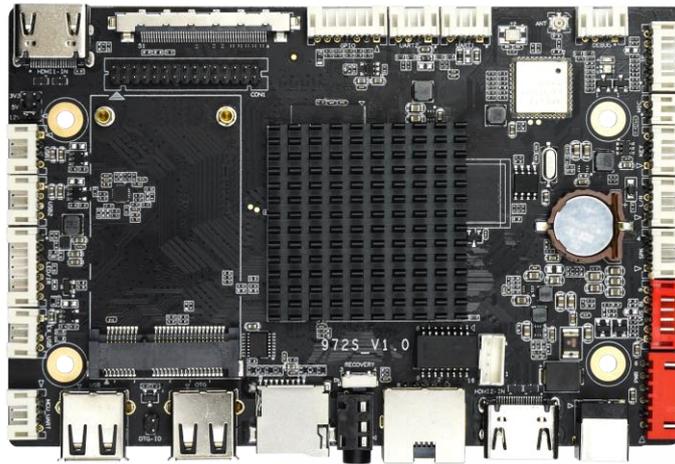

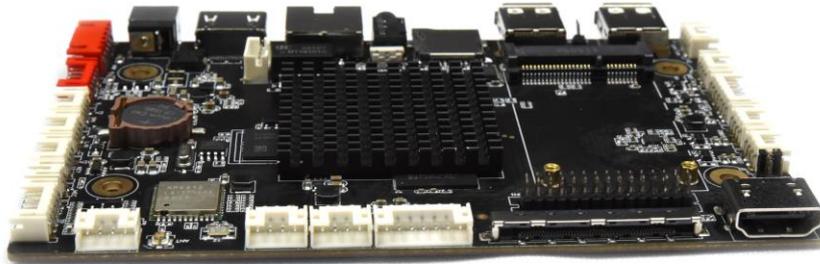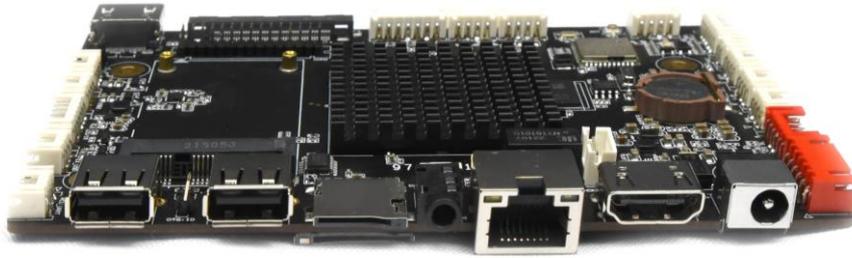

Special Note:

The model label is attached to the sales product. There is a difference between the product picture in the specification and the real product. It is not a fake and shoddy product. If you have any questions, you can contact Huidu Technology for confirmation.