

## 1. Summary

**X8406 is a two-in-one (sender plus video processor) 4-image controller designed and produced by Linsn, which supports up to 3.84 million pixels. It has 6 Gigabit outputs for up to 7680pixels in width or 4000pixels in height**

## 2. Features

- Support 4 DVI inputs;
- Supports 6 gigabit outputs;
- Supports 4 images which can be set in any position with any size ;
- Support fade in/out effects;
- Supports easy and quick software control;
- Supports up to 3.84 million pixels; up to 7680 pixels horizontally or up to 4000 pixels vertically;
- Supports dual USB2.0 communication for setup or cascade;
- Supports Linsn whole series receivers and multi-function boards.

### 3. Appearance

#### Front Panel



No	Name	Description
1	Monitor	TFT_LCD for displaying info
2	Control Knob	for selecting and adjusting
3	Button	2 functional buttons, MENU and EXIT
4	L1, L2,L3,L4	For switching image from DVI1-DVI4
5	Power switch	ON/OFF

#### Rear Panel



Control port		
1	LAN/WAN	Fast Ethernet Port
2	USB IN	USB input, for connecting PC or cascade
3	USB OUT	USB output for cascade
4	USB Config	For connecting PC to do setup
Input port		
1	DVI	4*DVI input
2	HDMI	Invalid
Output port		


Official website: [www.linsn.com](http://www.linsn.com)

Add: Floor 15&16, Jiajiahao Business Building, No. 10168, Shennan Blvd,  
Nanshan District, Shenzhen

Tel: +86-0755-86183590/ 4008836968

1	RJ45X6	6*RJ45 gigabit output
<b>Power connector</b>		
<b>100~240V AC</b>		

#### 4. Dimensions

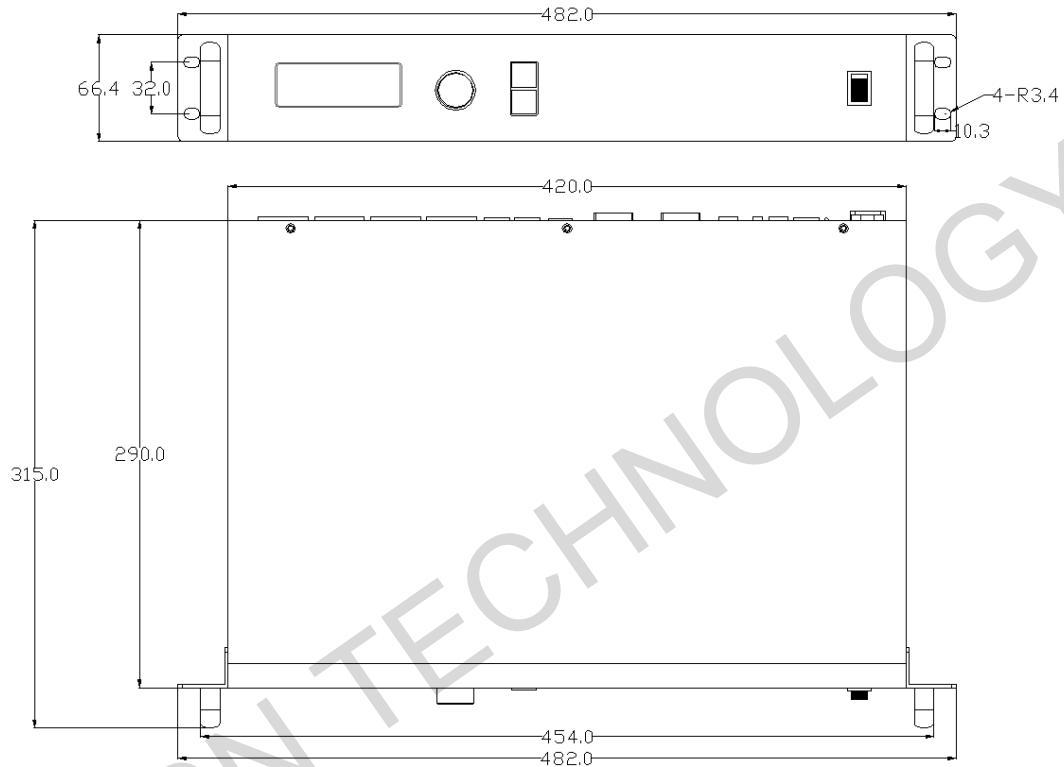

#### 5. Working environment

Input Voltage	100~240V AC
Rated Power consumption	35W
Working Temperature	-20°C~60°C
Rack Unit	1.5U
Net weight	4.2kg

**END**