

**BIGTREE TECH**

# HDMI7 V1.2

## User Manual



## Revision Log

Version	Date	Revisions
v1.00	15th August 2022	Initial Version
V2.00	1st November 2023	<p>HDMI7 V1.0 was updated to HDMI V1.2 in November 2023</p> <ul style="list-style-type: none"><li>• Move the power interface and HDMI interface inside the screen to solve the problem of unsightly appearance of the wiring harness outside the screen range.</li><li>• 2. Increase the range of QR code ink.</li></ul>

---

## CONTENTS

<b>Revision Log</b> .....	<b>1</b>
<b>Brief Introduction</b> .....	<b>3</b>
<b>Main Features</b> .....	<b>3</b>
<b>Product Parameters</b> .....	<b>3</b>
<b>Indicator Light</b> .....	<b>3</b>
<b>Product Dimensions</b> .....	<b>4</b>
<b>Peripheral Interface</b> .....	<b>5</b>
<b>Interface Diagram</b> .....	<b>5</b>
<b>Functions</b> .....	<b>6</b>
<b>Connecting to the Display Output Device</b> .....	<b>6</b>
<b>Audio Out</b> .....	<b>6</b>
<b>Screen Brightness Adjustment</b> .....	<b>7</b>
<b>Display Direction Adjustment</b> .....	<b>7</b>
<b>Working with Raspberry Pi</b> .....	<b>8</b>
<b>HDMI Display Output</b> .....	<b>8</b>
<b>HDMI Audio Output</b> .....	<b>8</b>

## Brief Introduction

BIGTREETECH HDMI7 V1.2 is a universal 7-inch HDMI display screen developed by the 3D printing team of Shenzhen Big Tree Technology Co., Ltd.

## Main Features

- HDMI input, can work with Raspberry Pi.
- Connect to a PC, it can be used as a PC monitor.
- Adopt a 7-inch IPS capacitive touch screen with a resolution of 1024x600, support 5-point touch.
- Built-in audio decoding circuit, support 3.5mm headphone jack audio output.
- Support brightness and display direction adjustment.

## Product Parameters

- Product Dimension: 100 x 165mm
- Mounting Size: 100 x 165mm, you can read more details here: [BTT HDMI7\\_V1.2\\_SIZE](#)
- Power Input: DC 5V
- Logic Voltage: DC 3.3V
- Screen Size: 7-inch IPS Display
- Screen Resolution: 1024x600
- Screen Viewing Angle: 160°


## Indicator Light

When the motherboard is powered on:

The power indicator, D11(Power) red light, lights up, indicating that the power supply is functioning normally.

The working status indicator, D12(Status) green light, flashes, indicating that the screen is working normally.

## Product Dimensions

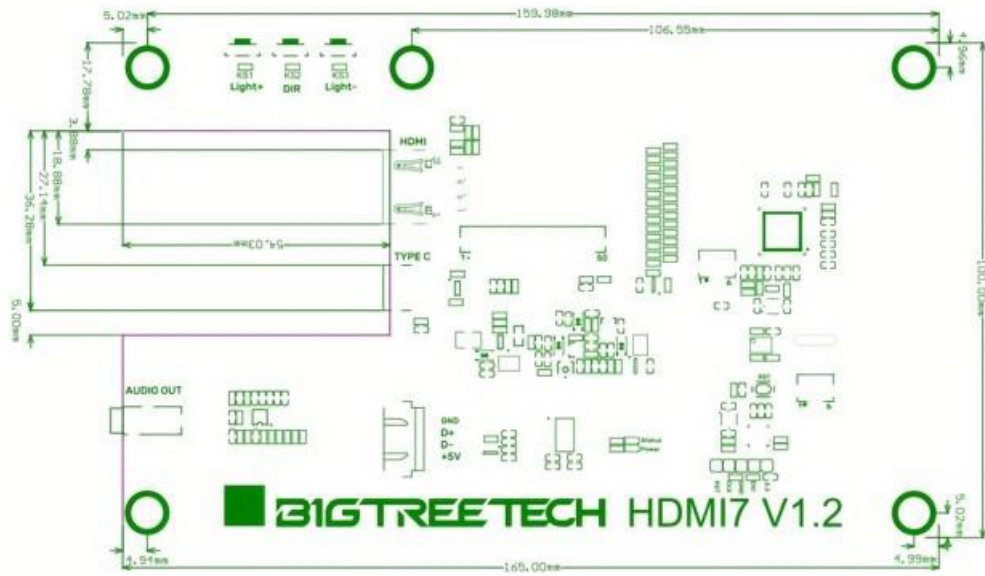


HDMI7 v1.2

\*You can read more details here: [BTT HDMI7\\_V1.2](#)

## Peripheral Interface

### Interface Diagram

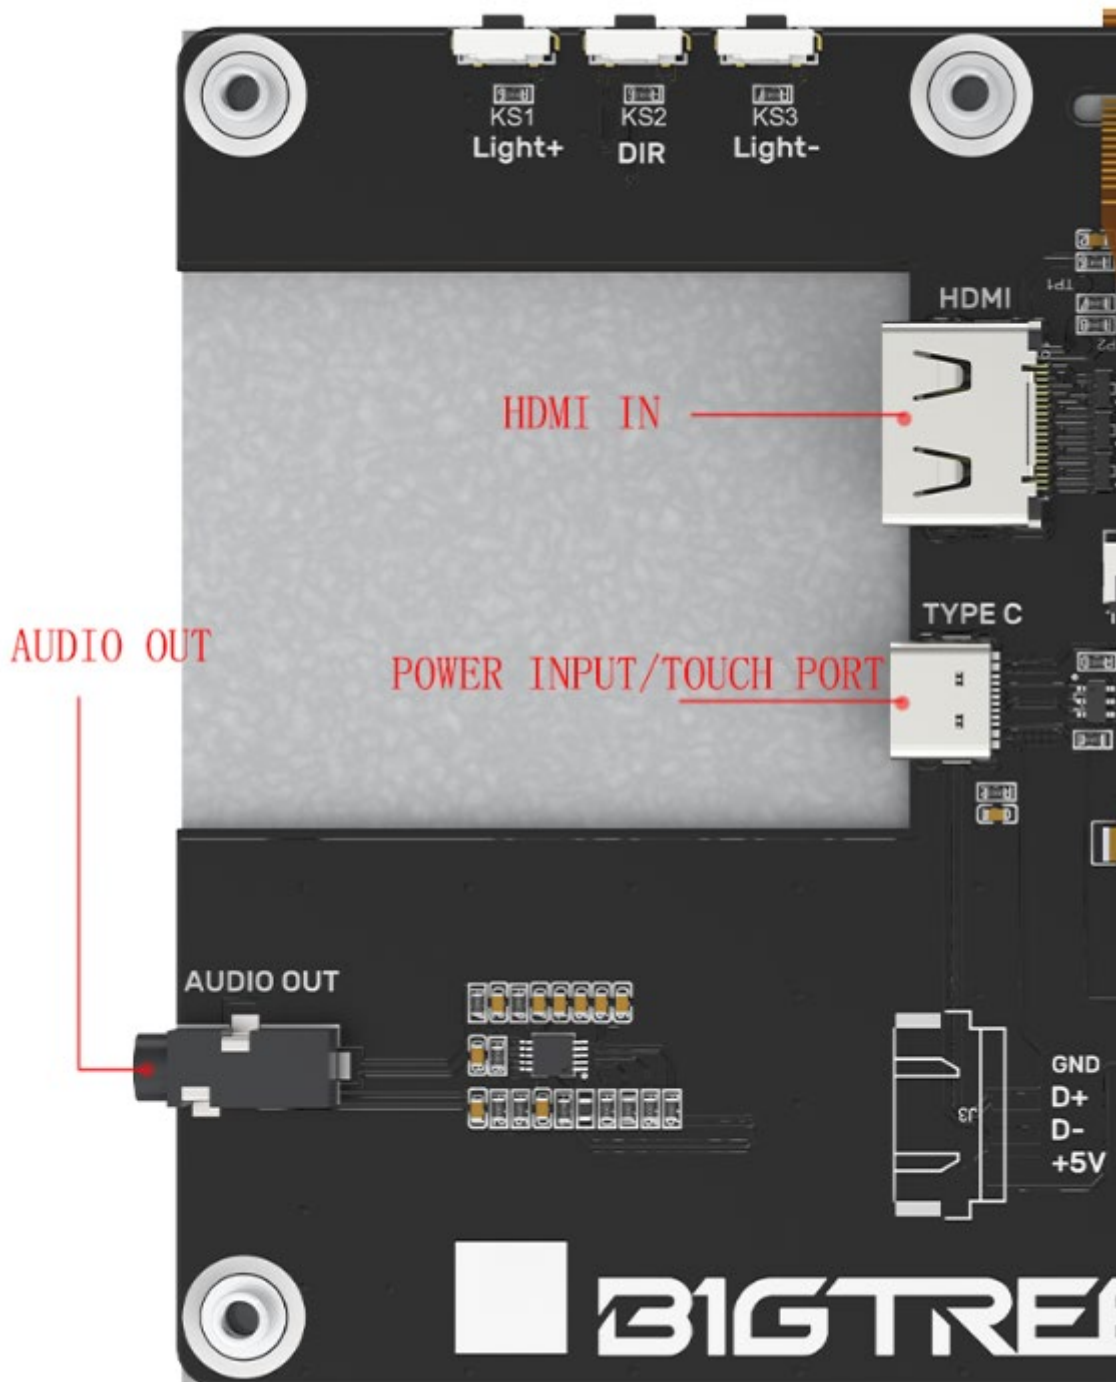

## Functions

### Connecting to the Display Output Device

1. Use the Type C data cable to connect the HDMI7 to the display output device (compatible with Raspberry Pi/PC/other devices that support HDMI display output). When connecting to the PC, the PC will automatically load the driver under normal circumstances. After the driver is loaded, the touch device can be recognized.
2. Use the HDMI cable to connect HDMI7 to the display output device. Usually, after connecting the HDMI cable, the LCD can be displayed normally within 5 seconds.


### Audio Out

Plug the 3.5mm earphone/speaker into the AUDIO interface to realize audio output.




## Screen Brightness Adjustment

BIGTREETECH HDMI7 V1.2 supports brightness adjustment, you can increase the brightness via the Ks1 button, and decrease the brightness via the Ks3 button.

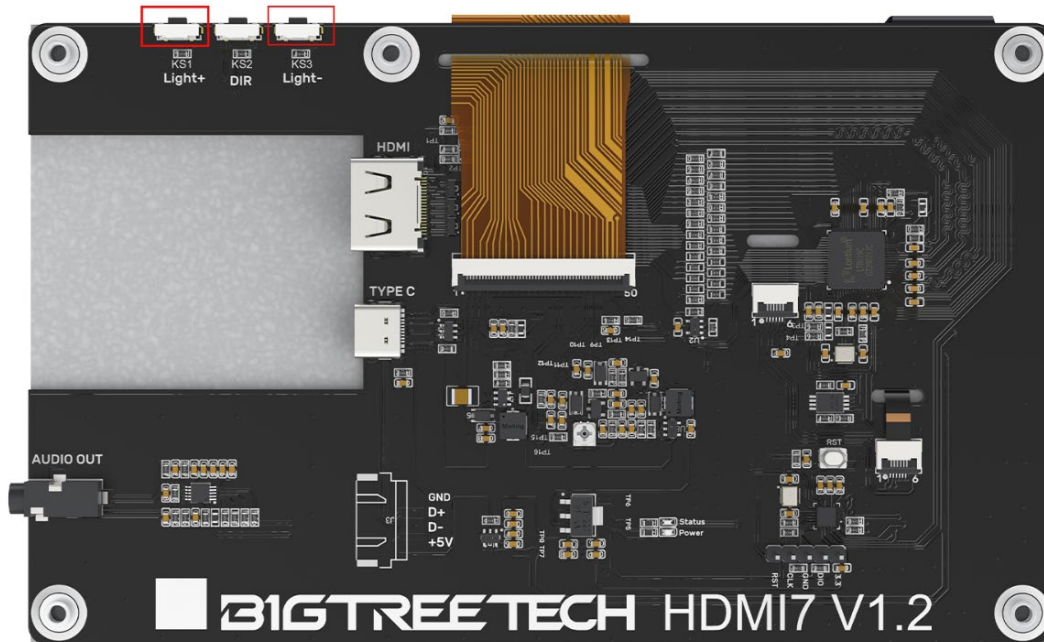

## Display Direction Adjustment

BIGTREETECH HDMI7 V1.2 supports horizontal display direction adjustment via the Ks2 button.

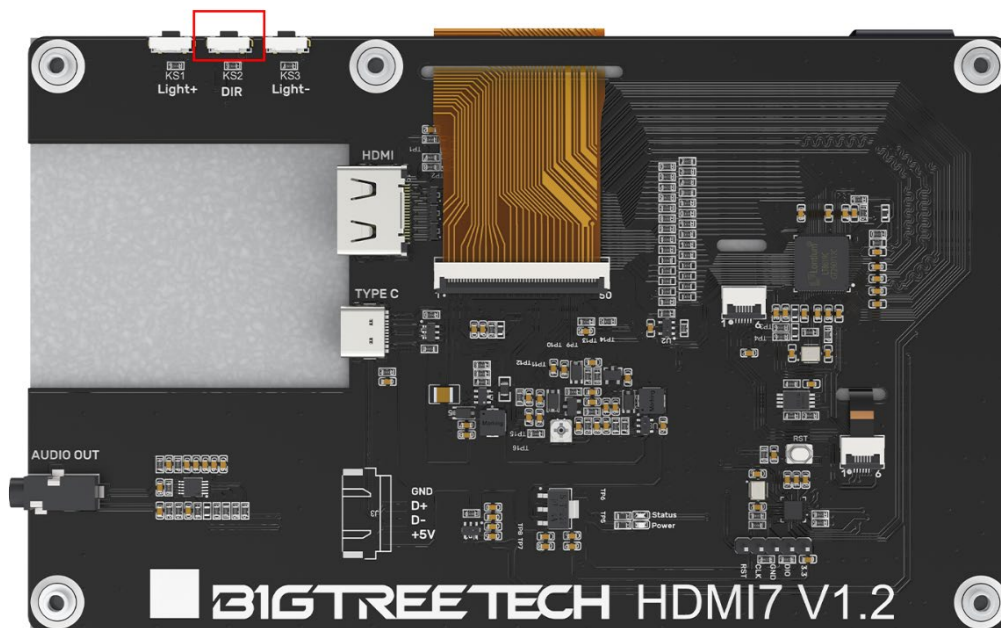



## Working with Raspberry Pi

### HDMI Display Output

1. Download at Raspberry Pi official website:
  - Raspberry Pi OS with desktop
  - Release date: April 4th 2022
  - System: 32-bit
  - Kernel version: 5.15
  - Debian version: 11 (bullseye)


2. Write the image to the TF card, then modify the following configuration in config.txt:

```
# uncomment to force a specific HDMI mode (this will force VGA)
hdmi_group=2
hdmi_mode=87
hdmi_cvt 1024 600 60 6 0 0 0
# uncomment to force a HDMI mode rather than DVI. This can make audio work in
# DMT (computer monitor) modes
hdmi_drive=1
```

### HDMI Audio Output

1. Raspberry Pi system version:
  - Raspberry Pi OS with desktop
  - Release date: April 4th 2022
  - System: 32-bit
  - Kernel version: 5.15
  - Debian version: 11 (bullseye)

2. After entering the system desktop, right-click the audio source icon in the upper right corner, and select HDMI.

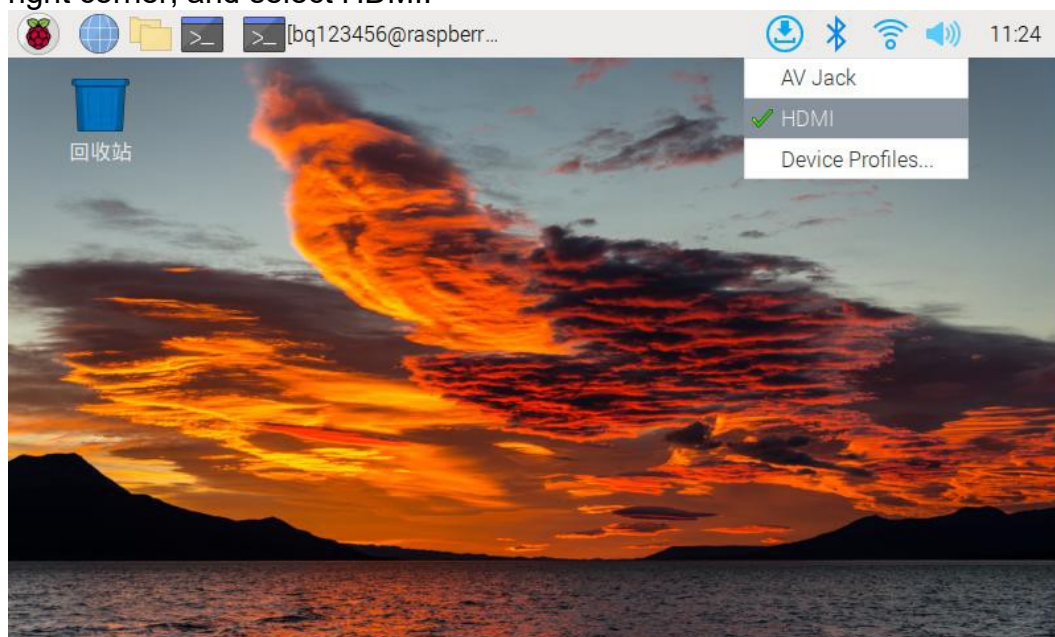

如果您还需要此产品的其他资源，可以到 <https://github.com/bigtreetech/> 上自行查找，如果无法找到您所需的资源，可以联系我们的售后支持（[service005@biqu3d.com](mailto:service005@biqu3d.com)）。

若您使用中还遇到别的问题，欢迎您联系我们，我们会细心为您解答；若您对我们的产品有什么好的意见或建议，也欢迎您回馈给我们，我们也会仔细斟酌您的意见或建议，感谢您选择 **BIGTREETECH** 制品，谢谢！