
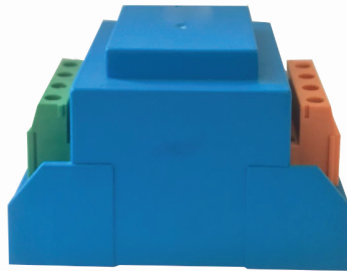


## Hall voltage sensor

Sub-plate installation, Crimping terminal output. Detect DC, AC and pulse current, High insulation between primary side and the vice side circuit.

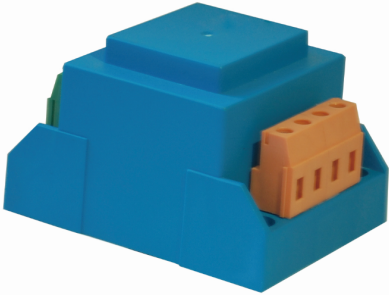

zero gain


### Product features

- Low power consumption
- Good linearity
- No insertion loss
- Fast response time
- Good anti-interference ability

### Product application

- Railway
- Metallurgical
- Welding machine
- Robot
- Motor
- Inverter power supply
- Variable frequency governor
- Uninterrupted power supply and communication power supply

High side after wiring  
Terminal proposal seal processing

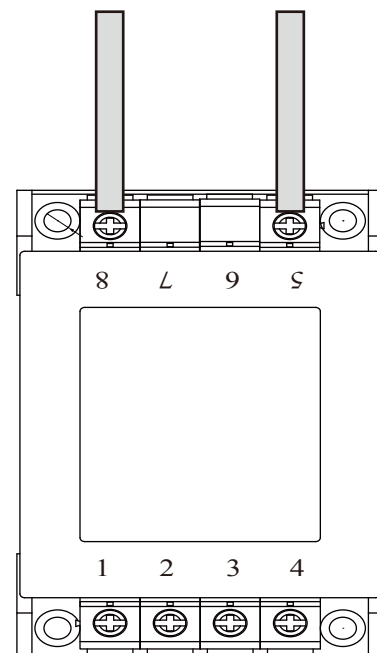

**Electrical parameters:** ( The following parameters are typical values and actual values will be subject to product testing )

**Remarks:**

|              |                         |                        |            |            |            |            |            |                                                               |
|--------------|-------------------------|------------------------|------------|------------|------------|------------|------------|---------------------------------------------------------------|
| $I_p$        | Rated input             | $\pm 50V$              | $\pm 100V$ | $\pm 200V$ | $\pm 300V$ | $\pm 400V$ | $\pm 500V$ | Standard input                                                |
| $I_{pm}$     | Input measurement range | $\pm 75V$              | $\pm 150V$ | $\pm 300V$ | $\pm 450V$ | $\pm 600V$ | $\pm 750V$ | Default is 1.5 times of rated input                           |
| $V_{out}$    | Rated output            | $\pm 5V$               |            |            |            |            |            | Standard output                                               |
| X            | Accuracy                | 1%                     |            |            |            |            |            | $I=I_p$                                                       |
| $\epsilon_L$ | Linearity               | 0.2%                   |            |            |            |            |            | $I=0 \sim \pm I_p$                                            |
| $V_c$        | Supply voltage          | $\pm 12V / \pm 15V$    |            |            |            |            |            | One or the other Supply voltage range $\pm 5\%$               |
| $I_c$        | Current consumption     | $\leq \pm 15mA + I_s$  |            |            |            |            |            | Reference will be subject to the measured                     |
| $R_l$        | Load impedance          | $\geq 10K \Omega$      |            |            |            |            |            | Collection port impedance while lower voltage affect accuracy |
| $V_{oe}$     | Zero offset voltage     | $\leq \pm 30mV$        |            |            |            |            |            | $T_A=25^\circ C$                                              |
| $T_r$        | Response time           | 40~200 $\mu s$         |            |            |            |            |            | Reference will be subject to the measured                     |
| $N_w$        | Weight                  | 185g                   |            |            |            |            |            | Reference will be subject to the measured                     |
| $T_a$        | Operation temperature   | $-10 \sim +70^\circ C$ |            |            |            |            |            |                                                               |
| $T_s$        | Storage temperature     | $-25 \sim +70^\circ C$ |            |            |            |            |            |                                                               |
| Bw           | Band width              | -                      |            |            |            |            |            | Factory test according to DC                                  |
| $V_d$        | Delectric strength      | 3.5KV 50Hz 1min        |            |            |            |            |            |                                                               |

### Instruction for use:

1. Correct wiring as indicated
2. Full scale measurement, response time and following the speed for the best
3. Faulty wiring can lead to product damage and output uncertainty


### Safe operation:

- \*Please read this specification carefully before use.
- \*When you need to move the product, please be sure to disconnect the power and all the connected cables.
- \*If found shell, devices attached to the fixed parts, wire, or have any damaged, please immediately deal with hidden dangers.
- \*If there is any doubt about the safe operation of the equipment, the equipment and the corresponding accessories should be closed immediately, and the fastest time for troubleshooting.


### Proclamations:

As our products are constantly being improved and updated, we reserve the right to modify the content of this specification at any time without prior notice.

Dimensions(in mm±0.5) :

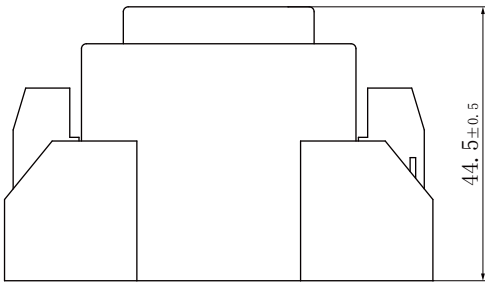


Side view

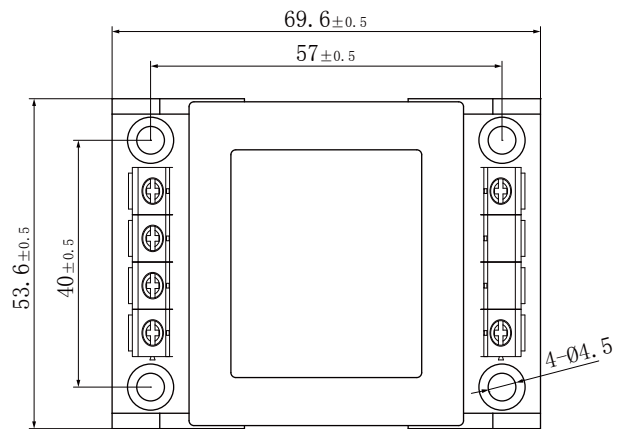

Top view

Wiring diagram :

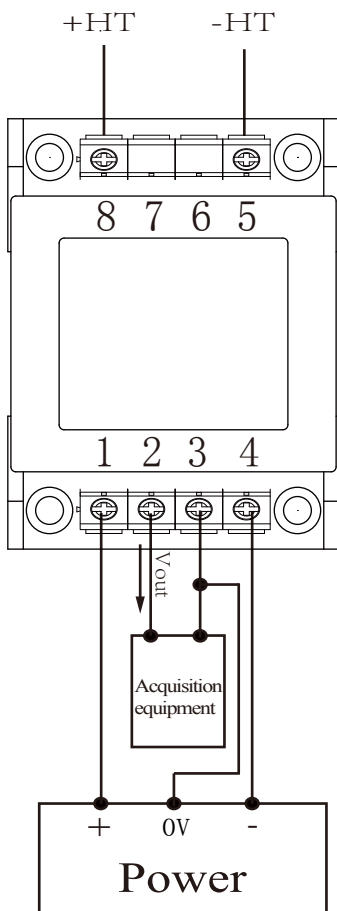

**Terminal definition :**

- 1: +V
- 2: Vout
- 3: 0V
- 4: -V
- 5: -HT
- 6: Air terminal
- 7: Air terminal
- 8: +HT

※ **Detection :**

- ① Choose the auxiliary power supply with small ripple ( $\leq 10\text{mV}$ )
- ② Switch on auxiliary power
- ③ The auxiliary power is connected to the sensor
- ④ The sensor detects the primary current