

Hall voltage sensor

Din-rail installation, Crimping terminal output. Detect DC, AC and pulse current, High insulation between primary side and the vice side circuit.



Front view



Bottom view


Product features

- Low power consumption
- Good linearity
- No insertion loss
- Fast response time
- Good anti-interference ability

Product application

- Railway
- Metallurgical
- Welding machine
- Robot
- Motor
- Inverter power supply
- Variable frequency governor
- Uninterrupted power supply and communication power supply

High side after wiring
Terminal proposal seal processing

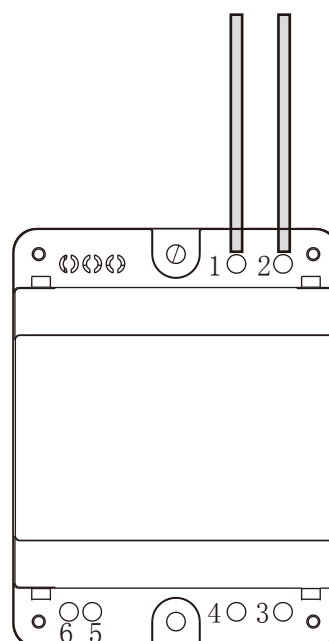

Electrical parameters: (The following parameters are typical values and actual values will be subject to product testing)

Remarks:

| | | | | | | | | |
|--------------|-------------------------|------------------------|------------|------------|------------|------------|------------|---|
| I_p | Rated input | $\pm 50V$ | $\pm 100V$ | $\pm 200V$ | $\pm 300V$ | $\pm 400V$ | $\pm 500V$ | Standard input |
| I_{pm} | Input measurement range | $\pm 70V$ | $\pm 150V$ | $\pm 300V$ | $\pm 450V$ | $\pm 600V$ | $\pm 750V$ | Default is 1.5 times of rated input |
| V_{out} | Rated output | $\pm 5V$ | | | | | | Standard output |
| X | Accuracy | 1% | | | | | | $I=I_p$ |
| ϵ_L | Linearity | 0.2% | | | | | | $I=0 \sim \pm I_p$ |
| V_c | Supply voltage | $\pm 12V / \pm 15V$ | | | | | | One or the other Supply voltage range $\pm 5\%$ |
| I_c | Current consumption | $\leq \pm 15mA + I_s$ | | | | | | Reference will be subject to the measured |
| R_l | Load impedance | $\geq 10K \Omega$ | | | | | | Collection port impedance while lower voltage affect accuracy |
| V_{oe} | Zero offset voltage | $\leq \pm 30mV$ | | | | | | $T_A=25^\circ C$ |
| T_r | Response time | $40 \sim 200 \mu s$ | | | | | | Reference will be subject to the measured |
| N_w | Weight | 264g | | | | | | Reference will be subject to the measured |
| T_a | Operation temperature | $-10 \sim +70^\circ C$ | | | | | | |
| T_s | Storage temperature | $-25 \sim +70^\circ C$ | | | | | | |
| B_w | Band width | - | | | | | | Factory test according to DC |
| V_d | Delectric strength | 3.5KV 50Hz 1min | | | | | | |

Instruction for use:

1. Correct wiring as indicated
2. Full scale measurement, response time and following the speed for the best
3. Faulty wiring can lead to product damage and output uncertainty


Safe operation:

- *Please read this specification carefully before use.
- *When you need to move the product, please be sure to disconnect the power and all the connected cables.
- *If found shell, devices attached to the fixed parts, wire, or have any damaged, please immediately deal with hidden dangers.
- *If there is any doubt about the safe operation of the equipment, the equipment and the corresponding accessories should be closed immediately, and the fastest time for troubleshooting.


Proclamations:

As our products are constantly being improved and updated, we reserve the right to modify the content of this specification at any time without prior notice.

Dimensions(in mm±0.5) :

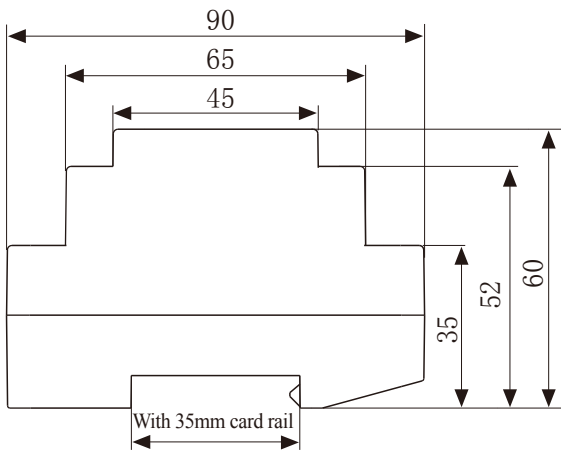


Front view

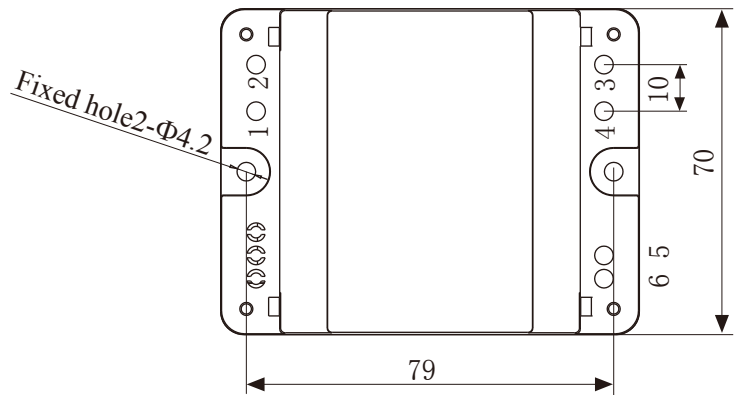

Top View

Wiring diagram:

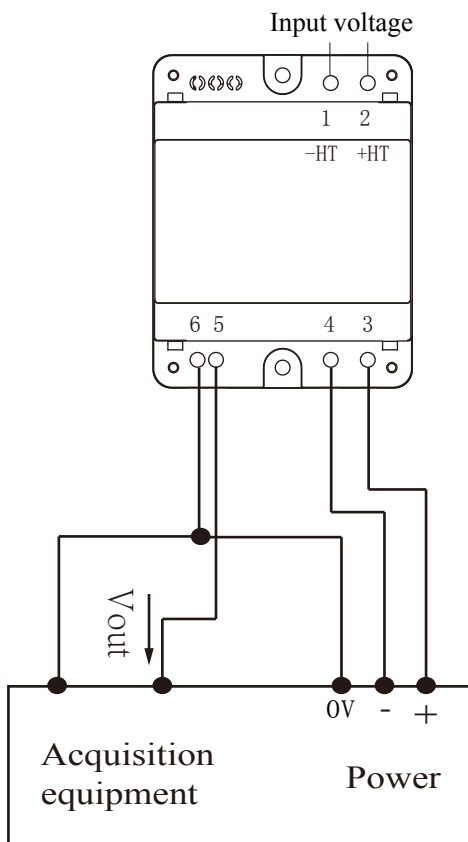

Terminal definition:

- 1: -HT
- 2: +HT
- 3: +V
- 4: -V
- 5: Vout
- 8: 0V

※ Detection:

- ① Choose the auxiliary power supply with small ripple ($\leq 10\text{mV}$)
- ② Switch on auxiliary power
- ③ The auxiliary power is connected to the sensor
- ④ The sensor detects the primary current