



Powerful Pump are designed for any equipment

COMPREHENSIVE PROTECTION



AMBOHR®, your reliable supplier of technical products as well as for OEM production.

AMBOHR® is a company specializing in the design and production of ozone generators, pump and health appliances.

We support a network of national and global partners with our experience and our qualified, multilingual staff. Partnership and long-term cooperation are very important to us.

We work closely with our partners to ensure that we understand and understand the needs of the market and are able to provide a quick solution to your needs. You too can benefit from an effective partnership with AMBOHR®.

We are very attentive to the needs of our customers and can thus constantly expand our product range. Customer service and a growing product range with an attractive price / performance ratio can be offered.

AMBOHR® is a registered trademark of AMBOHR ELECTRIC. With our special focus on product quality and customer service, all AMBOHR® products are rigorously tested and comply with the latest standards.

Let us know, we look forward to working with you.

Values Driven

Integrity in all our dealings
Respect for team(s) and people
Contributing to the success of our customers
Risk-taking, innovation and learning
Long-term perspective
100% accountability / 0 excuses.

Integrated Manufacturing

Vertical integration is the cornerstone of AMBOHR as it places innovation, development, design, manufacturing, testing, and shipping all within our control. With Everything Under Control, we can ensure the highest quality and customer satisfaction.

Limited Lifetime

Warranty With total control over engineering and manufacturing, we are able to guarantee the highest quality products on the market—products free of defects in material, workmanship, and design.



A

After Sales Services

- One year warranty and lifetime maintenance.

M

Multilingual Staff

- We support Global partners with our experienced and qualified, multilingual staff.

B

Bear Responsibility

- 100% accountability / 0 excuses.

O

Online 24*7

- Online 24*7 service to solve your problems

H

High Quality

- Our products have passed SAA, UL, CE, RoHS and other certifications...


R

Requests & Rest

- You make requests, and we do the rest.




FLOW GRAPH

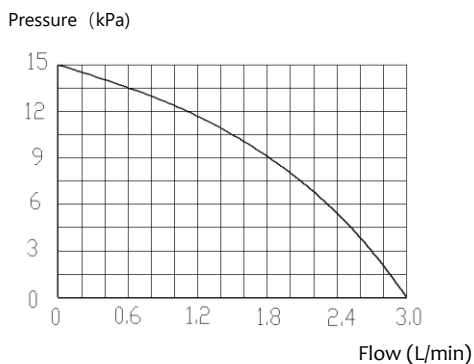


TECHNICAL DATA

Model No.	APM A03			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	20	11	190	95
Power (W)±15%	2,2	2,4	2,3	2,3
Flow (L/min)	3	3	3	3
pressure (kPa)	15	15	15	15
Noise (dB)	34	34	34	34
Use	Craft Supplies Hydroponics Ozone disinfection			

DIMENSIONS

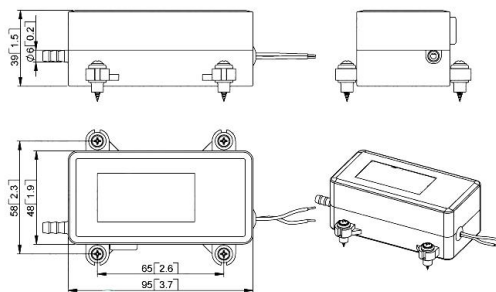


FLOW GRAPH

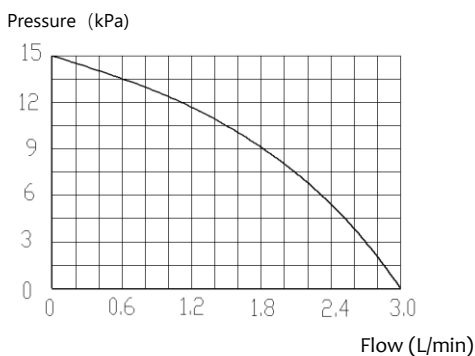

TECHNICAL DATA


Model No.	APM A03 plus			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	20	11	190	95
Power (W)±15%	2,2	2,4	2,3	2,3
Flow (L/min)	3	3	3	3
pressure (kPa)	15	15	15	15
Noise (dB)	34	34	34	34
Use	Craft Supplies Hydroponics Ozone disinfection			

DIMENSIONS

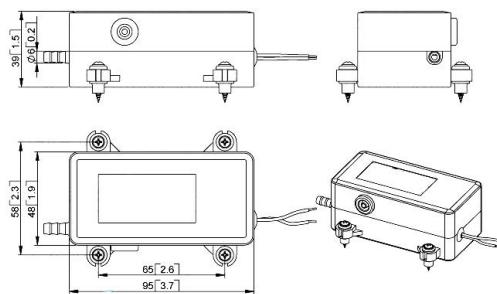




FLOW GRAPH

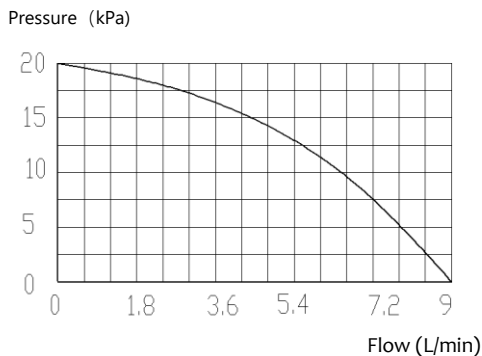


TECHNICAL DATA

Model No.	APM B08			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	34	17	300	150
Power (W)±15%	4.2	4.2	4.2	4.2
Flow (L/min)	9	9	9	9
pressure (kPa)	20	20	20	20
Noise (dB)	45	45	45	45
Use	Craft Supplies Hydroponics Ozone disinfection			

DIMENSIONS

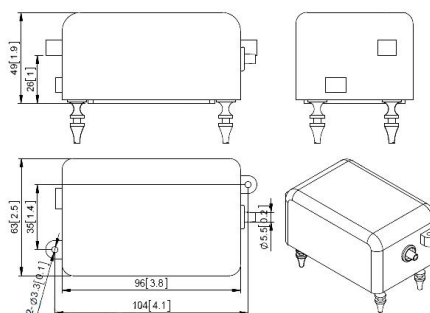


FLOW GRAPH

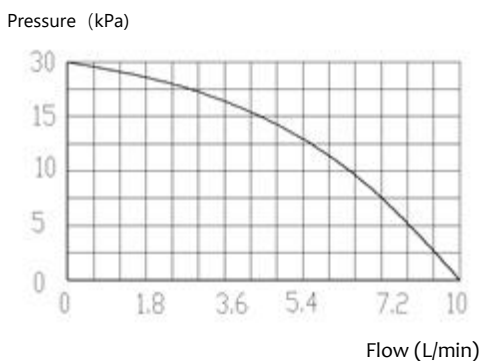

TECHNICAL DATA


Model No.	APM F10			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	65	39		
Power (W)±15%	6	6		
Flow (L/min)	10	10		
pressure (kPa)	30	30		
Noise (dB)	34	34		
Use	Craft Supplies Hydroponics Ozone disinfection			

DIMENSIONS

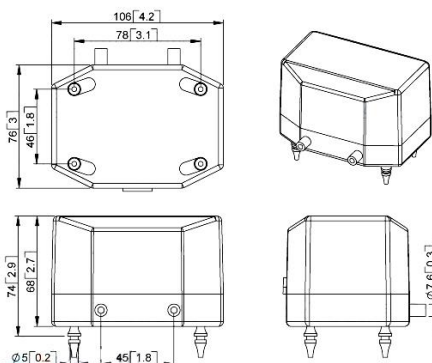




FLOW GRAPH

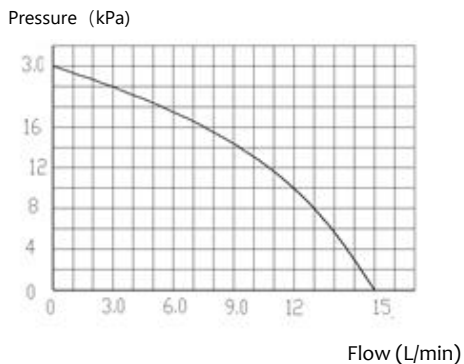


TECHNICAL DATA

Model No.	APM F15			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	110	52		
Power (W)±15%	10	10		
Flow (L/min)	15	15		
pressure (kPa)	30	30		
Noise (dB)	50	50		
Use	Craft Supplies Hydroponics Ozone disinfection			

DIMENSIONS

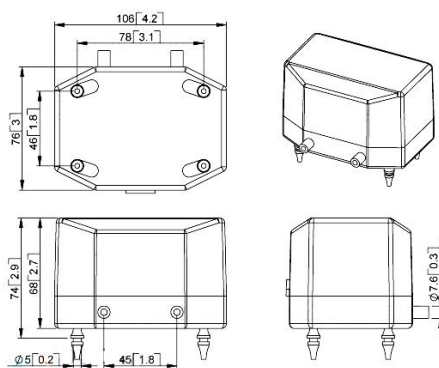


FLOW GRAPH

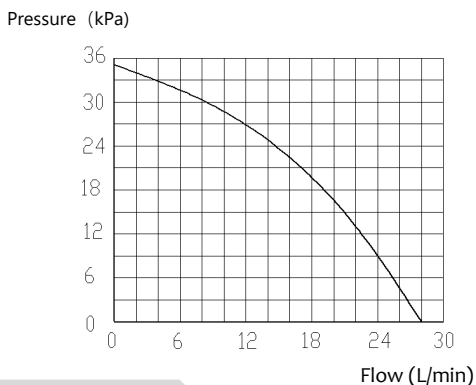

TECHNICAL DATA


Model No.	APM F30			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	156	153		
Power (W)±15%	20	22		
Flow (L/min)	29	29		
pressure (kPa)	35	35		
Noise (dB)	50	50		
Use	Craft Supplies Hydroponics Ozone disinfection			

DIMENSIONS

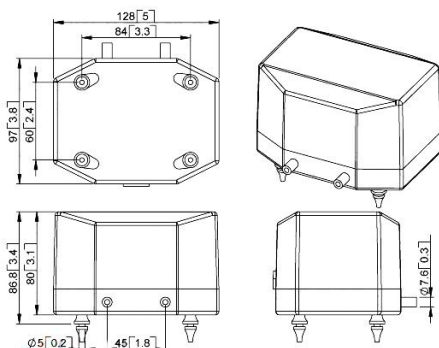




FLOW GRAPH

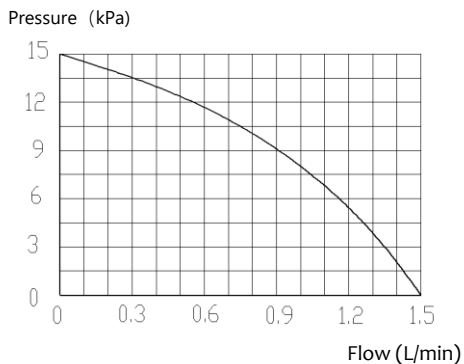


TECHNICAL DATA

Model No.	APM100			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	28	14	280	140
Power (W)±15%	1,1	1,1	1,1	1,1
Flow (L/min)	1,5	1,5	1,5	1,5
pressure (kPa)	15	15	15	15
Noise (dB)	34	34	34	34
Use	Craft Supplies Hydroponics Ozone disinfection			

DIMENSIONS

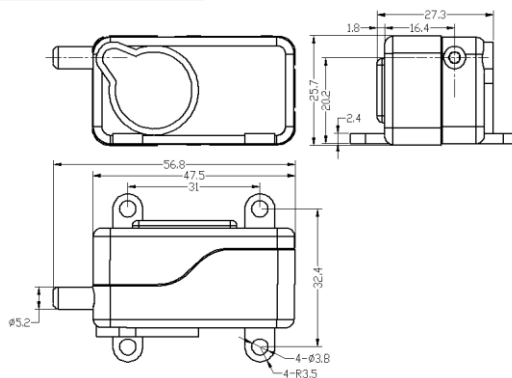


FLOW GRAPH

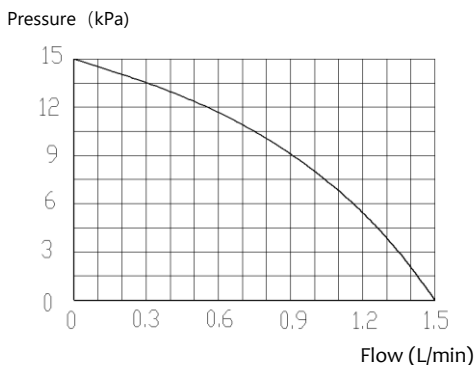

TECHNICAL DATA


Model No.	APM100J			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	28	14	280	140
Power (W)±15%	1,1	1,1	1,1	1,1
Flow (L/min)	1,5	1,5	1,5	1,5
pressure (kPa)	15	15	15	15
Noise (dB)	34	34	34	34
Use	Craft Supplies Hydroponics Ozone disinfection			

DIMENSIONS

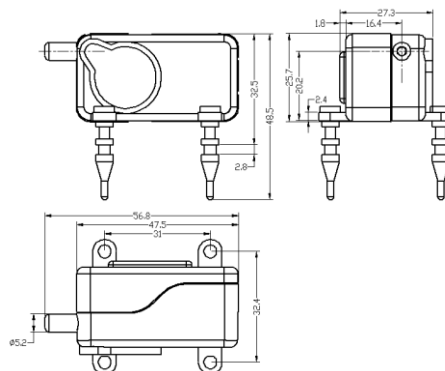




FLOW GRAPH

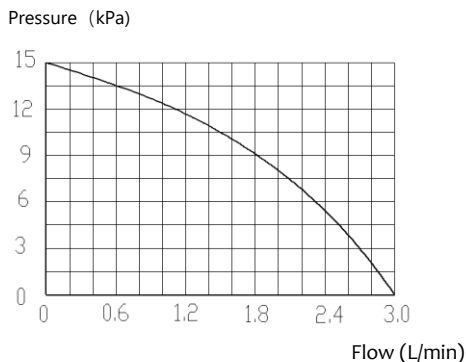


TECHNICAL DATA

Model No.	APM200			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	20	10	180	90
Power (W)±15%	2	2		
Flow (L/min)	3	3	3	3
pressure (kPa)	15	15	15	15
Noise (dB)	36	36	36	36
Use	Foot bath Ozone disinfection			

DIMENSIONS

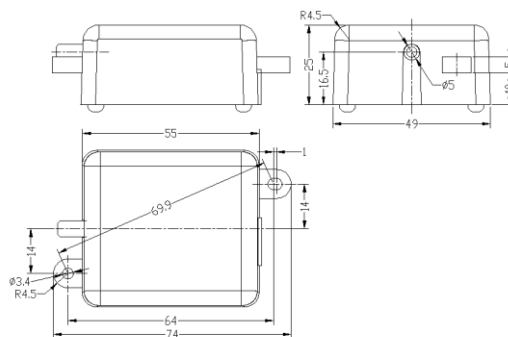


FLOW GRAPH

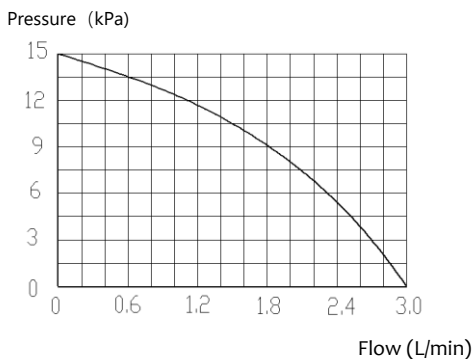

TECHNICAL DATA


Model No.	APM202			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	20	10	180	90
Power (W)±15%	2	2		
Flow (L/min)	2×1.5	2×1.5	2×1.5	2×1.5
pressure (kPa)	15	15	15	15
Noise (dB)	36	36	36	36
Use	Foot bath Ozone disinfection			

DIMENSIONS

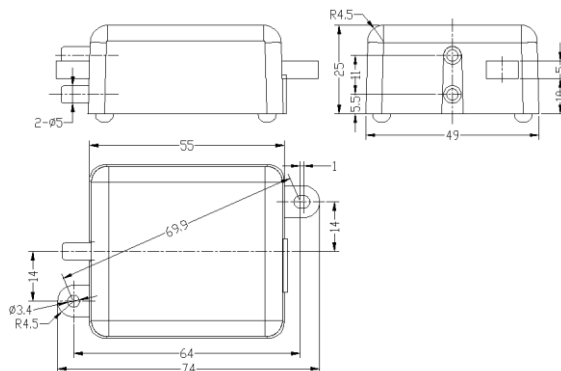




FLOW GRAPH

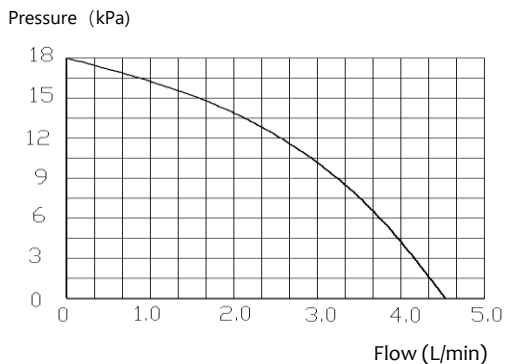


TECHNICAL DATA

Model No.	APM209			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	60	50		
Current (mA)±15%	32	35	350	180
Power (W)±15%	3,9	4,2		
Flow (L/min)	4,2	4,5	4,5	4,5
pressure (kPa)	18	18	18	18
Noise (dB)	32	32	32	32
Use	washing machine ,Aquarium			

DIMENSIONS

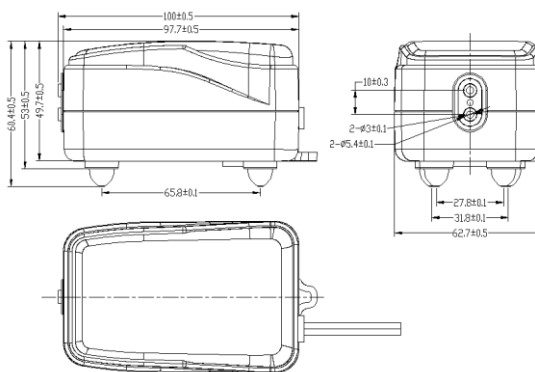


FLOW GRAPH

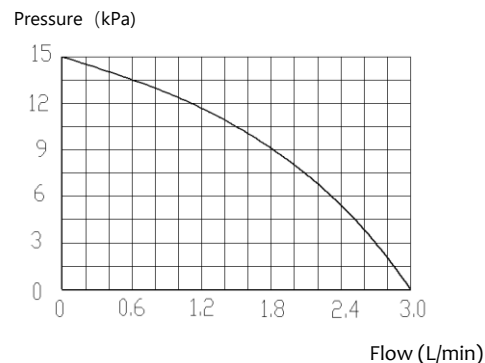

TECHNICAL DATA


Model No.	APM232			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	20	10	180	90
Power (W)±15%	2	2		
Flow (L/min)	2×1.5	2×1.5	2×1.5	2×1.5
pressure (kPa)	15	15	15	15
Noise (dB)	36	36	36	36
Use	Foot bath (With ozone), Ozone disinfection			

DIMENSIONS

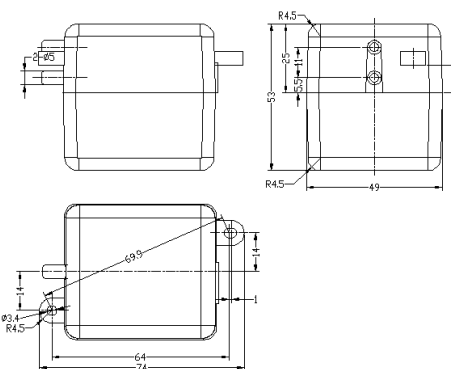




FLOW GRAPH

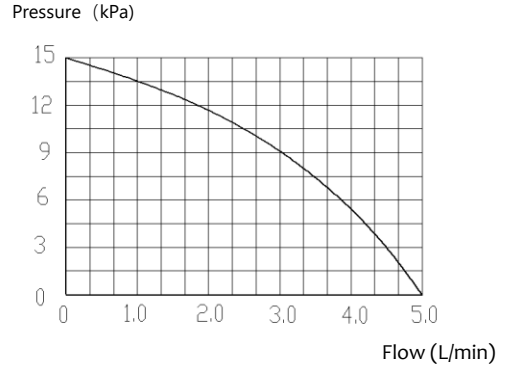


TECHNICAL DATA

Model No.	APM300			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	20	11	190	95
Power (W)±15%	2,2	2,4	2,3	2,3
Flow (L/min)	5	5	5	5
pressure (kPa)	15	15	15	15
Noise (dB)	36	36	36	36
Use	Foot bath ,Hydroponics ,Crafts, Ozone disinfection			

DIMENSIONS

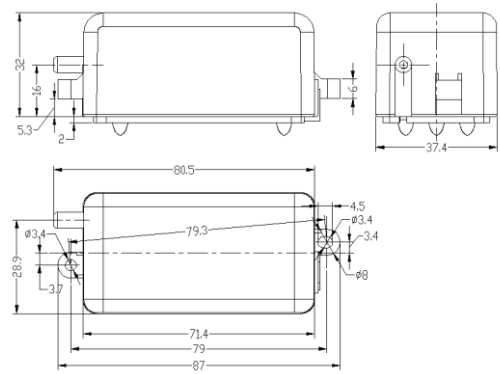


FLOW GRAPH

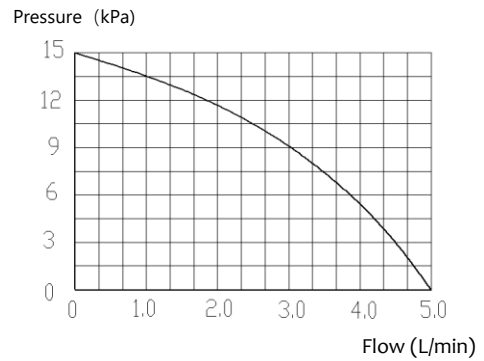

TECHNICAL DATA


Model No.	APM300G			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	20	11	190	95
Power (W)±15%	2,2	2,4	2,3	2,3
Flow (L/min)	5	5	5	5
pressure (kPa)	15	15	15	15
Noise (dB)	36	36	36	36
Use	Ozone pump sterilization process			

DIMENSIONS

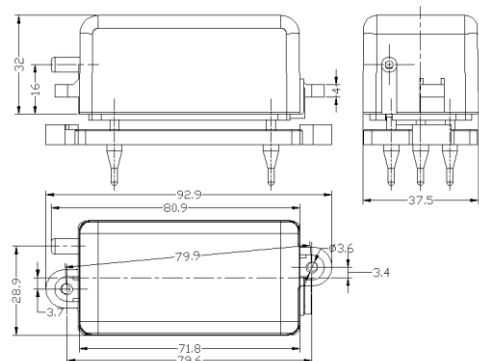




FLOW GRAPH

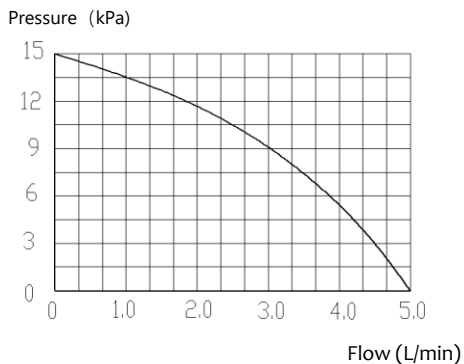


TECHNICAL DATA

Model No.	APM300J			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	20	11	190	95
Power (W)±15%	2,2	2,4	2,3	2,3
Flow (L/min)	5	5	5	5
pressure (kPa)	15	15	15	15
Noise (dB)	36	36	36	36
Use	Ozone pump sterilization process			

DIMENSIONS

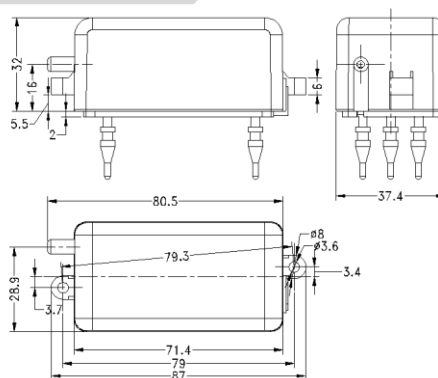


FLOW GRAPH

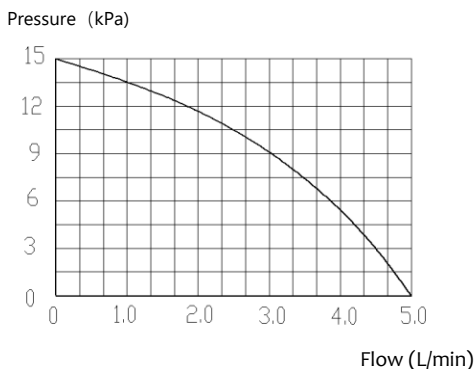

TECHNICAL DATA


Model No.	APM300JC			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	20	11	190	95
Power (W)±15%	2,2	2,4	2,3	2,3
Flow (L/min)	5	5	5	5
pressure (kPa)	15	15	15	15
Noise (dB)	36	36	36	36
Use	Ozone pump sterilization process			

DIMENSIONS

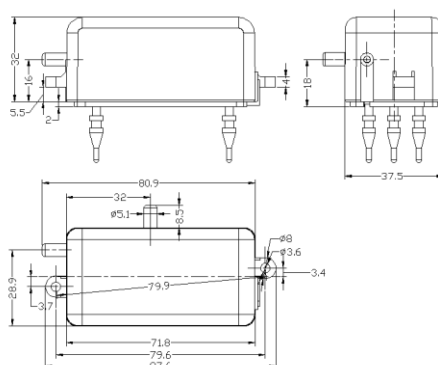




FLOW GRAPH

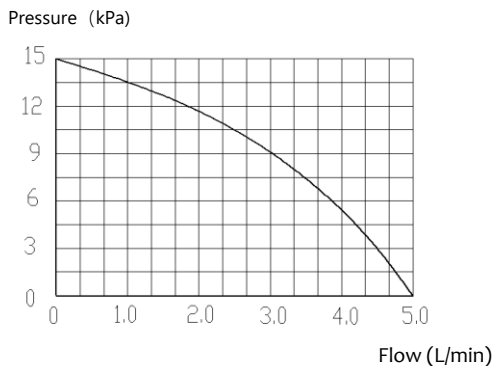


TECHNICAL DATA

Model No.	APM300B			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	20	11	190	95
Power (W)±15%	2,2	2,4	2,3	2,3
Flow (L/min)	5	5	5	5
pressure (kPa)	15	15	15	15
Noise (dB)	36	36	36	36
Use	Ozone pump sterilization process			

DIMENSIONS

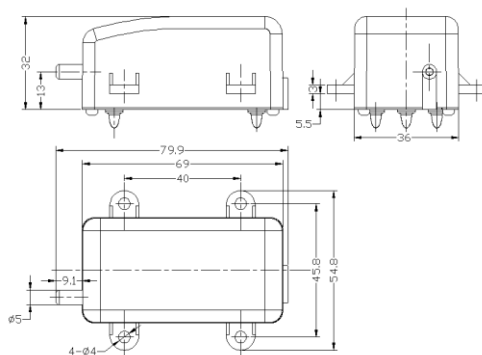


FLOW GRAPH

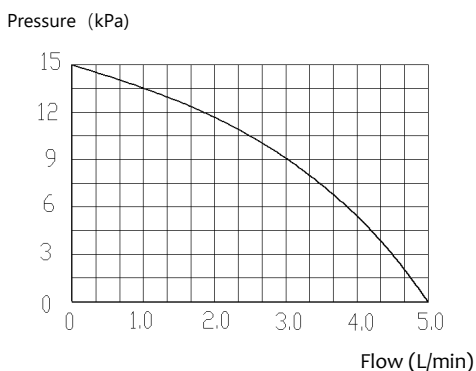

TECHNICAL DATA


Model No.	APM300C			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	20	11	190	95
Power (W)±15%	2,2	2,4	2,3	2,3
Flow (L/min)	5	5	5	5
pressure (kPa)	15	15	15	15
Noise (dB)	36	36	36	36
Use	Ozone pump sterilization process			

DIMENSIONS

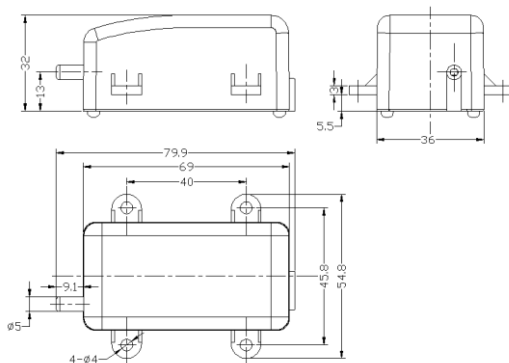




FLOW GRAPH

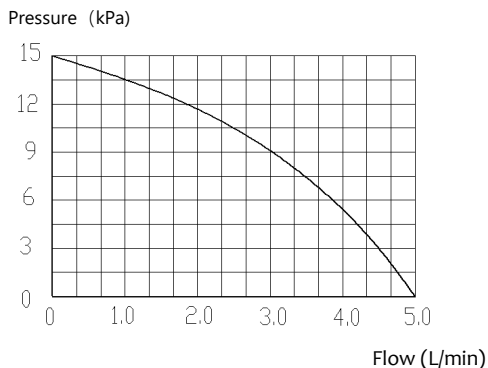


TECHNICAL DATA

Model No.	APM300BS			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	20	11	190	95
Power (W)±15%	2,2	2,4	2,3	2,3
Flow (L/min)	5	5	5	5
pressure (kPa)	15	15	15	15
Noise (dB)	36	36	36	36
Use	Ozone pump sterilization process			

DIMENSIONS

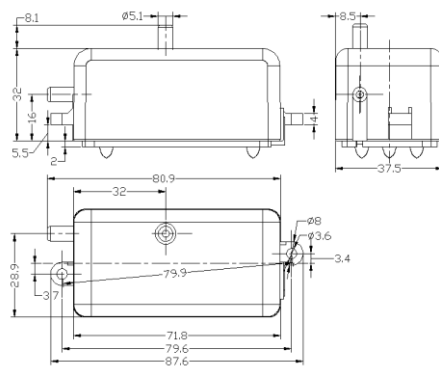


FLOW GRAPH

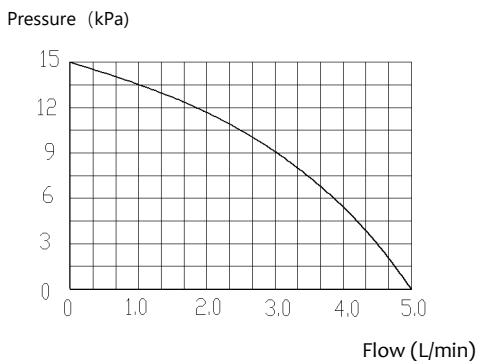

TECHNICAL DATA


Model No.	APM300C			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	20	11	190	95
Power (W)±15%	2,2	2,4	2,3	2,3
Flow (L/min)	5	5	5	5
pressure (kPa)	15	15	15	15
Noise (dB)	36	36	36	36
Use	Ozone pump sterilization process			

DIMENSIONS

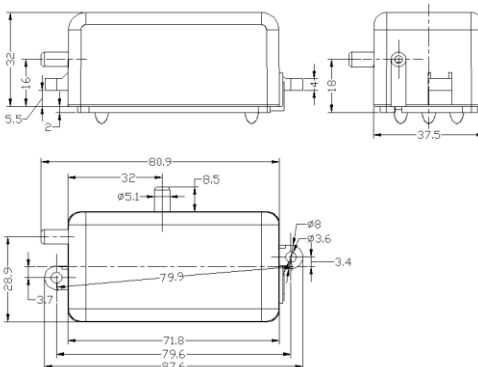




FLOW GRAPH

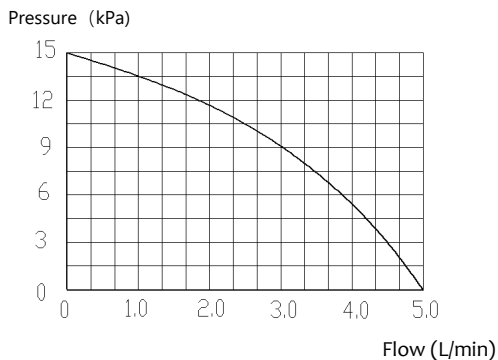


TECHNICAL DATA

Model No.	APM300SG			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	20	11	190	95
Power (W)±15%	2,2	2,4	2,3	2,3
Flow (L/min)	5	5	5	5
pressure (kPa)	15	15	15	15
Noise (dB)	36	36	36	36
Use	Craft Supplies Hydroponics Ozone disinfection			

DIMENSIONS

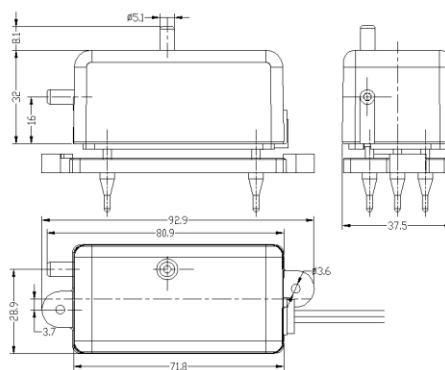


FLOW GRAPH

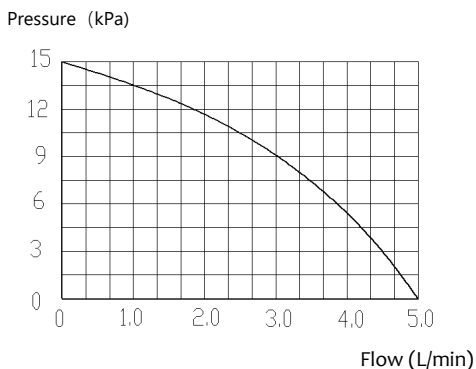

TECHNICAL DATA


Model No.	APM300CG			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	20	11	190	95
Power (W)±15%	2,2	2,4	2,3	2,3
Flow (L/min)	5	5	5	5
pressure (kPa)	15	15	15	15
Noise (dB)	36	36	36	36
Use	Craft Supplies Hydroponics Ozone disinfection			

DIMENSIONS

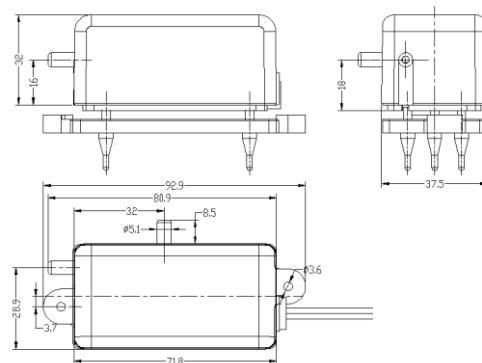




FLOW GRAPH

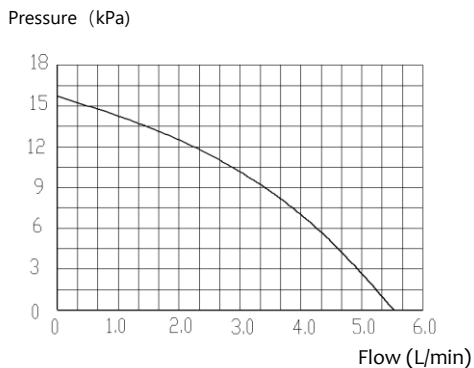


TECHNICAL DATA

Model No.	APM310			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	26	12	220	110
Power (W)±15%	2,8	2,6	2,7	2,7
Flow (L/min)	5,5	5,5	5,5	5,5
pressure (kPa)	16	16	16	16
Noise (dB)	45	45	45	45
Use	Foot bath, ozone disinfection			

DIMENSIONS

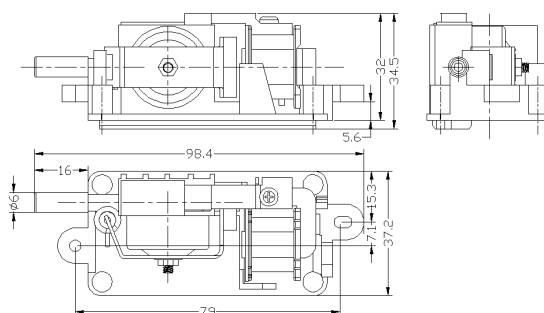


FLOW GRAPH

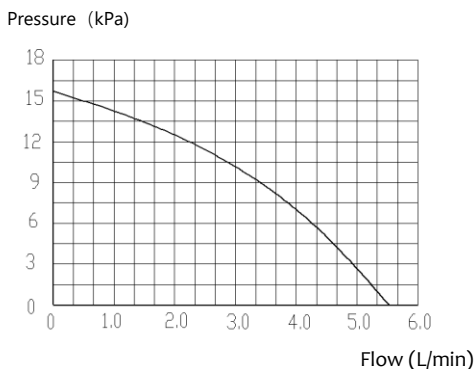

TECHNICAL DATA


Model No.	APM312			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	26	12	220	110
Power (W)±15%	2,8	2,6	2,7	2,7
Flow (L/min)	2.8*2	2.8*2	2.8*2	2.8*2
pressure (kPa)	16	16	16	16
Noise (dB)	45	45	45	45
Use	Foot bath, ozone disinfection			

DIMENSIONS

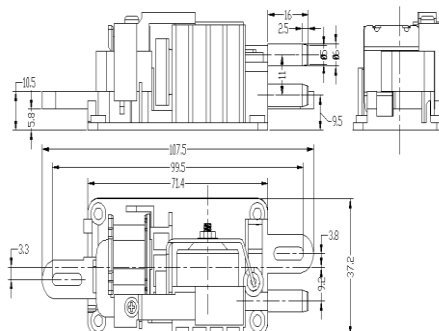




FLOW GRAPH

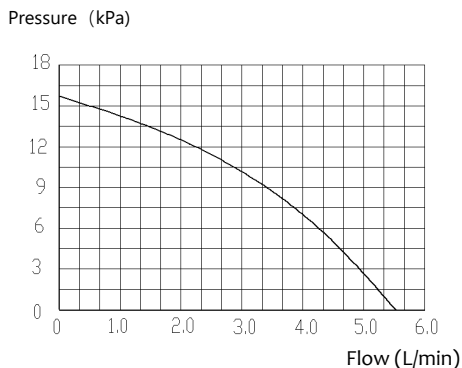


TECHNICAL DATA

Model No.	APM320			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	26	12	220	110
Power (W)±15%	2,8	2,6	2,7	2,7
Flow (L/min)	5,5	5,5	5,5	5,5
pressure (kPa)	16	16	16	16
Noise (dB)	45	45	45	45
Use	Foot tub (With ozone generator)			

DIMENSIONS

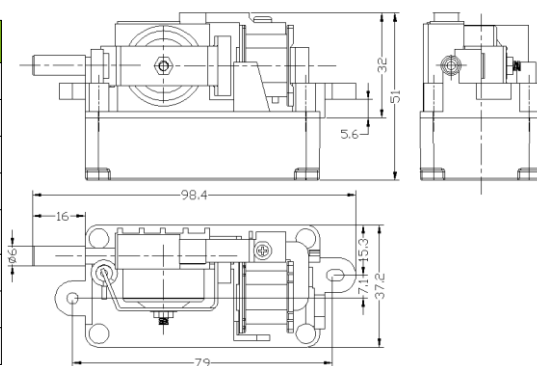


FLOW GRAPH

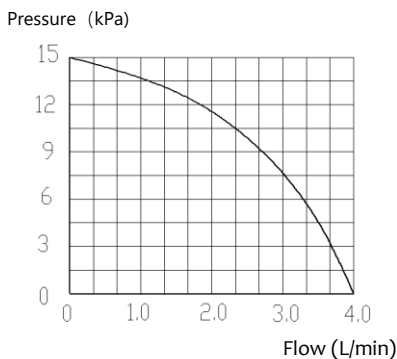

TECHNICAL DATA


Model No.	APM330			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	20	11	190	95
Power (W)±15%	2,2	2,4	2,3	2,3
Flow (L/min)	4	4	4	4
pressure (kPa)	15	15	15	15
Noise (dB)	36	36	36	36
Use	Fish tank/Aquarium(adjustable)			

DIMENSIONS

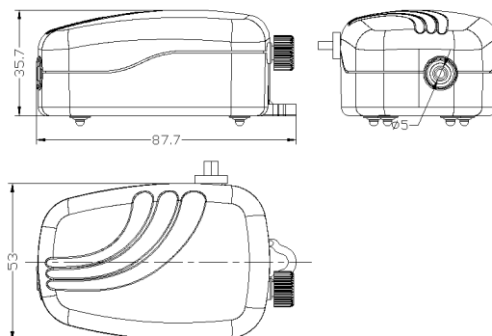




FLOW GRAPH

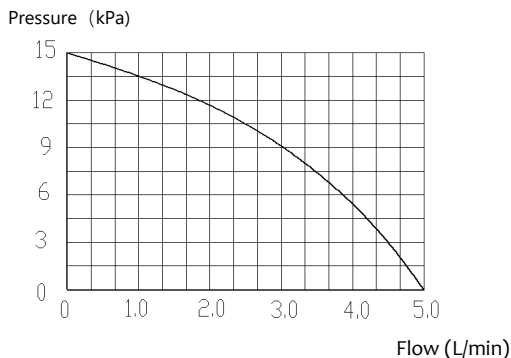


TECHNICAL DATA

Model No.	APM350			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	20	11	190	95
Power (W)±15%	2,2	2,4	2,3	2,3
Flow (L/min)	5	5	5	5
pressure (kPa)	15	15	15	15
Noise (dB)	36	36	36	36
Use	Ozone sterilization			

DIMENSIONS

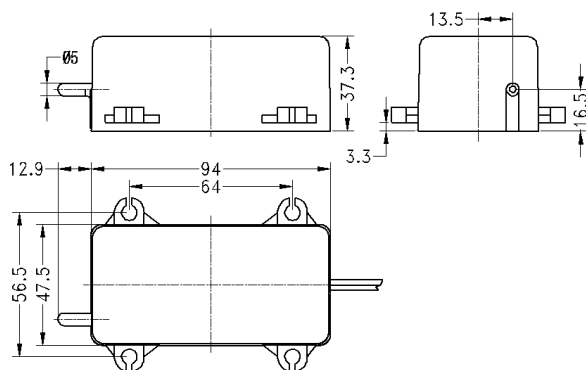


FLOW GRAPH

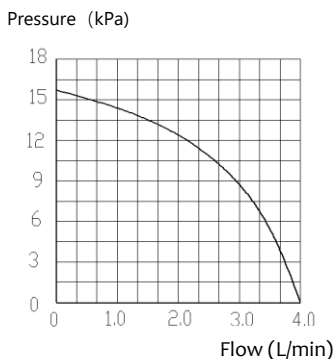

TECHNICAL DATA


Model No.	APM360			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	20	11	190	95
Power (W)±15%	2,2	2,2	2,2	2,2
Flow (L/min)	4	4	4	4
pressure (kPa)	16	16	16	16
Noise (dB)	36	36	36	36
Use	washing machine			

DIMENSIONS

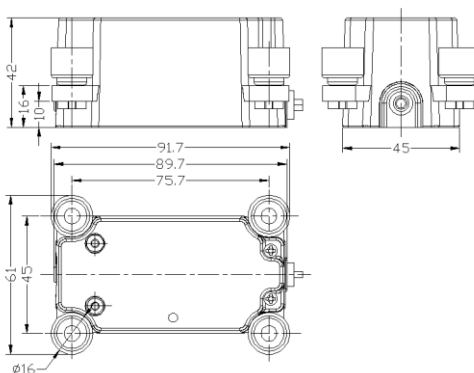




FLOW GRAPH

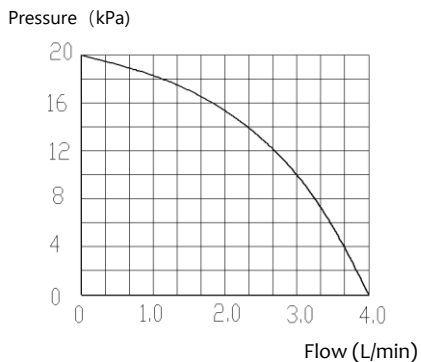


TECHNICAL DATA

Model No.	APM380			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	20	11	190	95
Power (W)±15%	2,2	2,2	2,2	2,2
Flow (L/min)	4	4	4	4
pressure (kPa)	20	20	20	20
Noise (dB)	35	35	35	35
Use	Aquarium			

DIMENSIONS

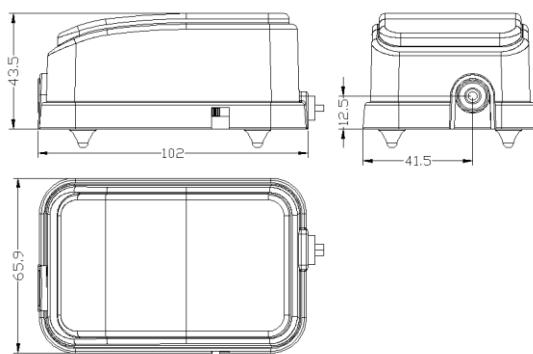


FLOW GRAPH

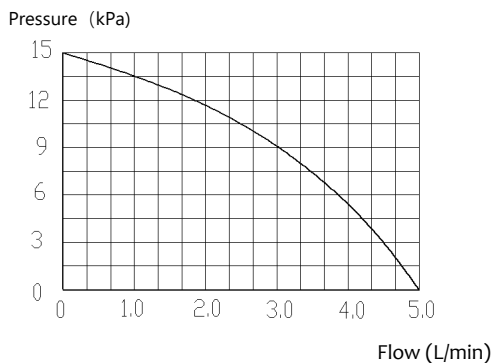

TECHNICAL DATA


Model No.	APM390			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	20	11	190	95
Power (W)±15%	2,2	2,4	2,3	2,3
Flow (L/min)	5	5	5	5
pressure (kPa)	15	15	15	15
Noise (dB)	34	34	34	34
Use	Ozone sterilization ,Aromatherapy machine			

DIMENSIONS

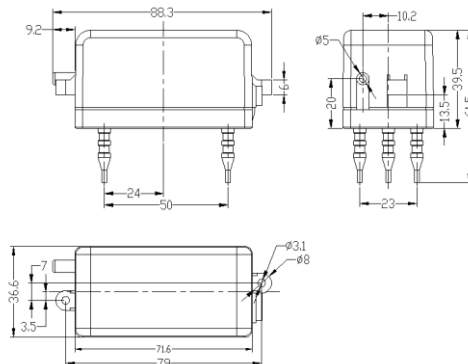




FLOW GRAPH

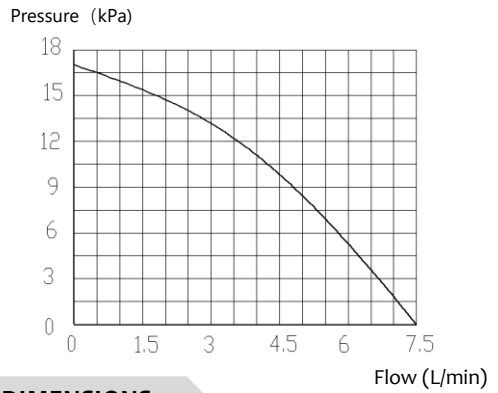


TECHNICAL DATA

Model No.	APM500			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	32	16	280	140
Power (W)±15%	3,3	3,4	3,4	3,4
Flow (L/min)	7,5	7,5	7,5	7,5
pressure (kPa)	18	18	18	18
Noise (dB)	36	36	36	36
Use	Foot bath, ozone disinfection			

DIMENSIONS

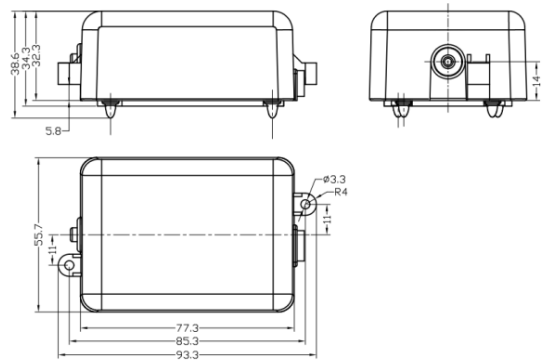


FLOW GRAPH

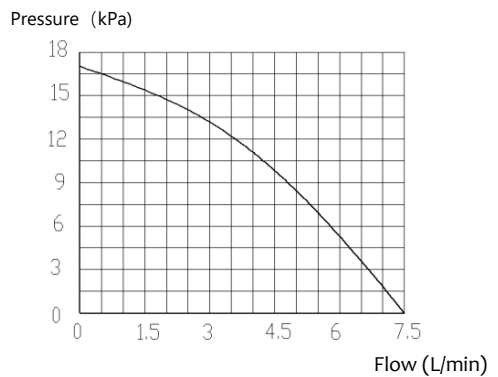

TECHNICAL DATA


Model No.	AP-500J			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	32	16	280	140
Power (W)±15%	3,3	3,4	3,4	3,4
Flow (L/min)	7,5	7,5	7,5	7,5
pressure (kPa)	18	18	18	18
Noise (dB)	36	36	36	36
Use	Ozone sterilization			

DIMENSIONS

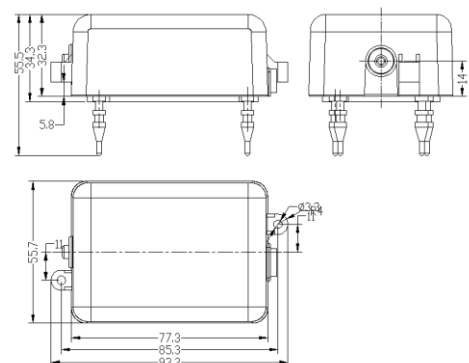




FLOW GRAPH

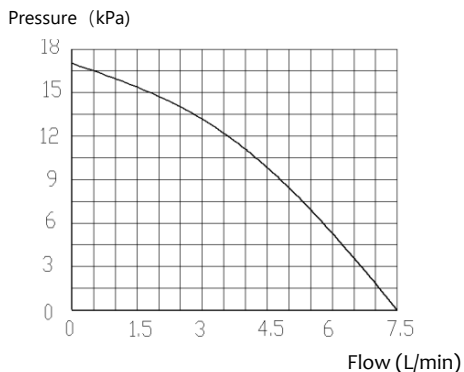


TECHNICAL DATA

Model No.	APM500SJ			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	32	16	280	140
Power (W)±15%	3,3	3,4	3,4	3,4
Flow (L/min)	7,5	7,5	7,5	7,5
pressure (kPa)	18	18	18	18
Noise (dB)	36	36	36	36
Use	Precision instrument testing			

DIMENSIONS

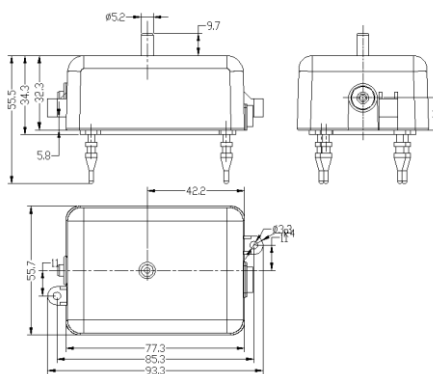


FLOW GRAPH

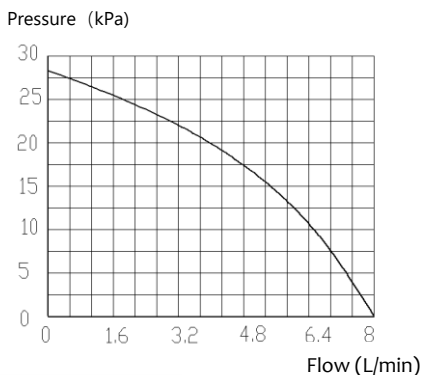

TECHNICAL DATA

Model No.	APM550			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	34	17	300	150
Power (W)±15%	3,6	3,6	3,6	3,6
Flow (L/min)	8	8	8	8
pressure (kPa)	28	28	28	28
Noise (dB)	38	38	38	38
Use	Crafts, ozone disinfection			

DIMENSIONS

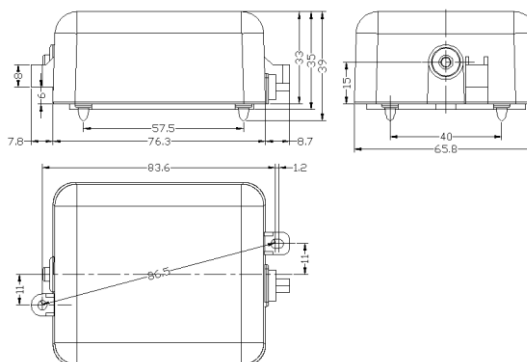





TECHNICAL DATA

Model No.	AP-550J			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	34	17	300	150
Power (W)±15%	3,6	3,6	3,6	3,6
Flow (L/min)	8	8	8	8
pressure (kPa)	28	28	28	28
Noise (dB)	38	38	38	38
Use	Crafts, ozone disinfection			

FLOW GRAPH

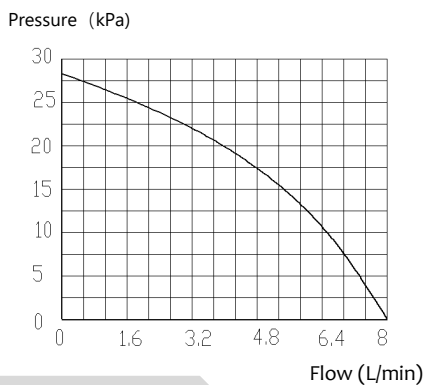

DIMENSIONS

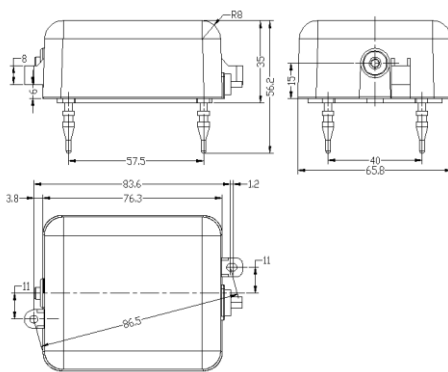


TECHNICAL DATA

Model No.	APM550S			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	34	17	300	150
Power (W)±15%	3,6	3,6	3,6	3,6
Flow (L/min)	8	8	8	8
pressure (kPa)	28	28	28	28
Noise (dB)	38	38	38	38
Use	Crafts, ozone disinfection			

FLOW GRAPH




DIMENSIONS

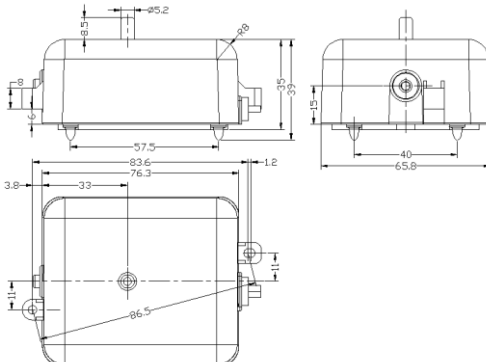




FLOW GRAPH

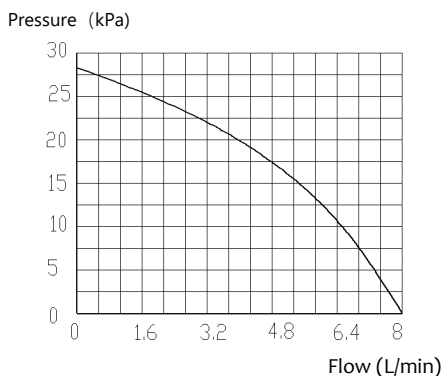


TECHNICAL DATA

Model No.	AP-550SJ			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	34	17	300	150
Power (W)±15%	3,6	3,6	3,6	3,6
Flow (L/min)	8	8	8	8
pressure (kPa)	28	28	28	28
Noise (dB)	38	38	38	38
Use	Crafts, ozone disinfection			

DIMENSIONS

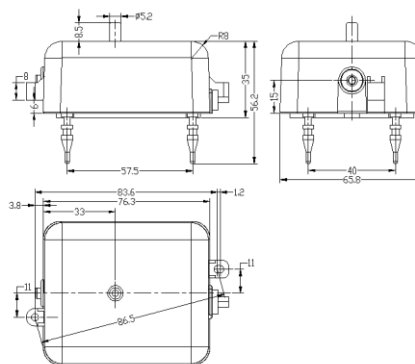


FLOW GRAPH

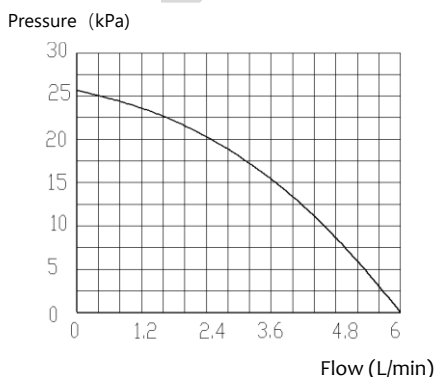

TECHNICAL DATA


Model No.	APM580			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	34	17	300	150
Power (W)±15%	3,6	3,6	3,6	3,6
Flow (L/min)	2×3	2×3	2×3	2×3
pressure (kPa)	26	26	26	26
Noise (dB)	36	36	36	36
Use	Aquarium (adjustable)			

DIMENSIONS

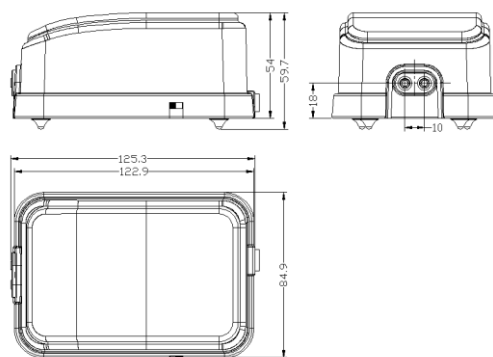




FLOW GRAPH

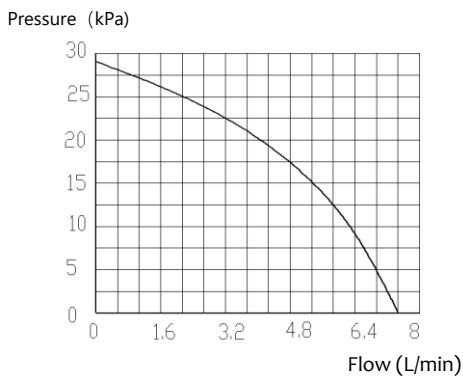


TECHNICAL DATA

Model No.	APM591			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	32	16	280	140
Power (W)±15%	3,3	3,4	3,4	3,4
Flow (L/min)	7,5	7,5	7,5	7,5
pressure (kPa)	29	29	29	29
Noise (dB)	33	33	33	33
Use	Perfume machine			

DIMENSIONS

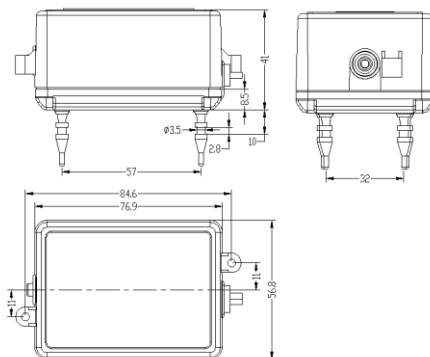


FLOW GRAPH

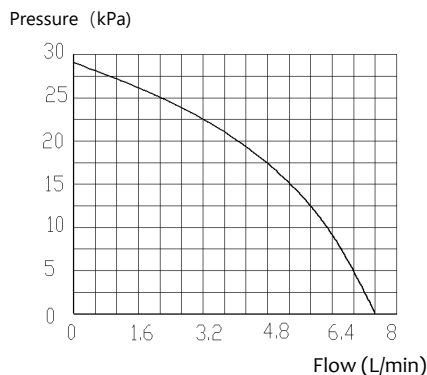

TECHNICAL DATA


Model No.	APM592			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	32	16	280	140
Power (W)±15%	3,3	3,4	3,4	3,4
Flow (L/min)	7,5	7,5	7,5	7,5
pressure (kPa)	29	29	29	29
Noise (dB)	33	33	33	33
Use	Perfume machine			

DIMENSIONS

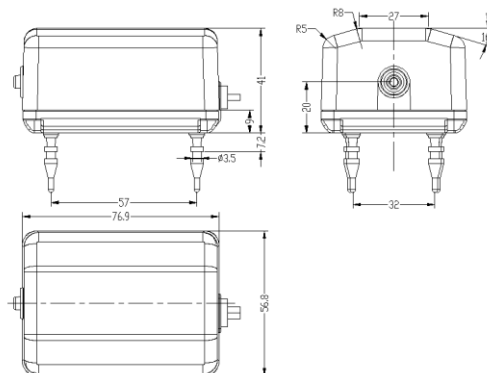




FLOW GRAPH

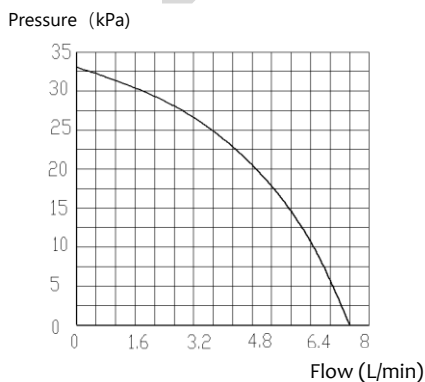


TECHNICAL DATA

Model No.	APM595			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	32	16	280	140
Power (W)±15%	3,3	3,4	3,4	3,4
Flow (L/min)	7,5	7,5	7,5	7,5
pressure (kPa)	33	33	33	33
Noise (dB)	33	33	33	33
Use	Perfume machine			

DIMENSIONS

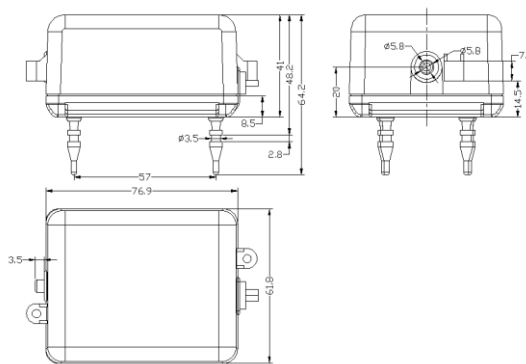


FLOW GRAPH

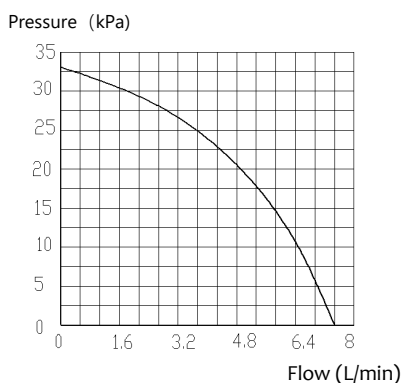

TECHNICAL DATA


Model No.	APM596			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	32	16	280	140
Power (W)±15%	3,3	3,4	3,4	3,4
Flow (L/min)	7,5	7,5	7,5	7,5
pressure (kPa)	33	33	33	33
Noise (dB)	33	33	33	33
Use	Perfume machine			

DIMENSIONS

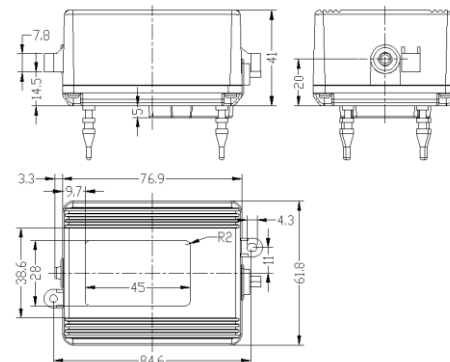




FLOW GRAPH

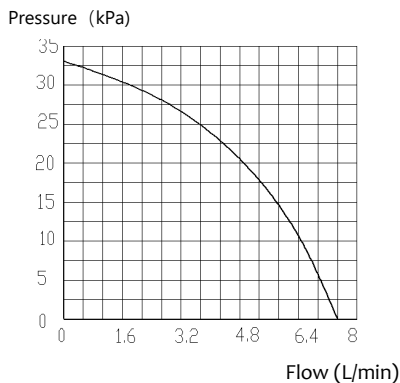


TECHNICAL DATA

Model No.	APM598			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	32	16	280	140
Power (W)±15%	3,3	3,4	3,4	3,4
Flow (L/min)	7,5	7,5	7,5	7,5
pressure (kPa)	33	33	33	33
Noise (dB)	33	33	33	33
Use	Perfume machine			

DIMENSIONS

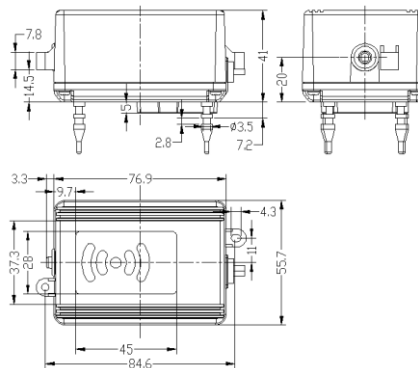


FLOW GRAPH

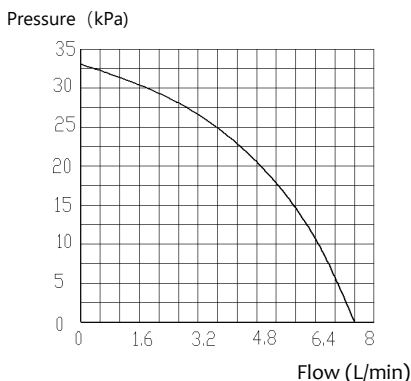

TECHNICAL DATA


Model No.	APM599			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	32	16	280	140
Power (W)±15%	3,3	3,4	3,4	3,4
Flow (L/min)	7,5	7,5	7,5	7,5
pressure (kPa)	33	33	33	33
Noise (dB)	33	33	33	33
Use	Perfume machine			

DIMENSIONS

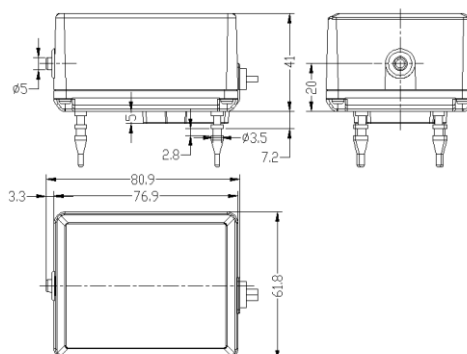




FLOW GRAPH

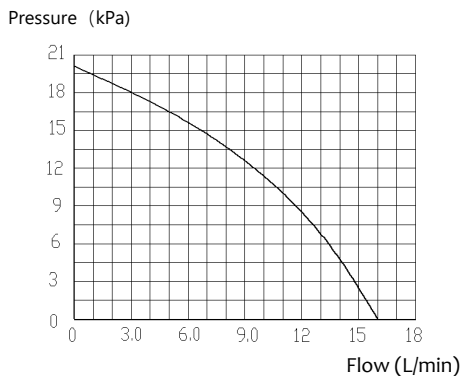


TECHNICAL DATA

Model No.	APM800			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	65	39	600	300
Power (W)±15%	6	6	6	6
Flow (L/min)	16	16	16	16
pressure (kPa)	20	20	20	20
Noise (dB)	34	34	34	34
Use	Foot bath, ozone sterilization			

DIMENSIONS

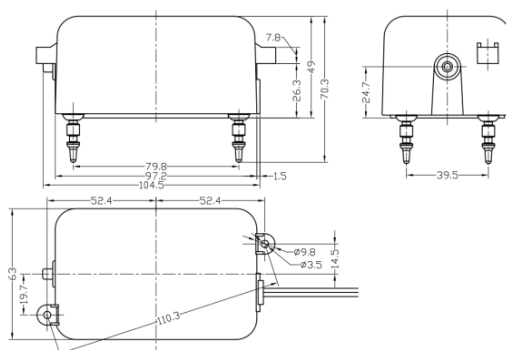


FLOW GRAPH

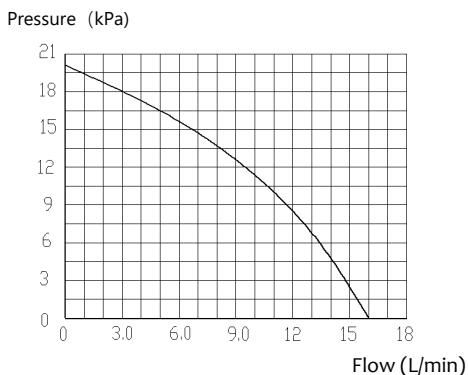

TECHNICAL DATA


Model No.	APM800S			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	65	39	600	300
Power (W)±15%	6	6	6	6
Flow (L/min)	16	16	16	16
pressure (kPa)	20	20	20	20
Noise (dB)	34	34	34	34
Use	Foot bath, ozone sterilization			

DIMENSIONS

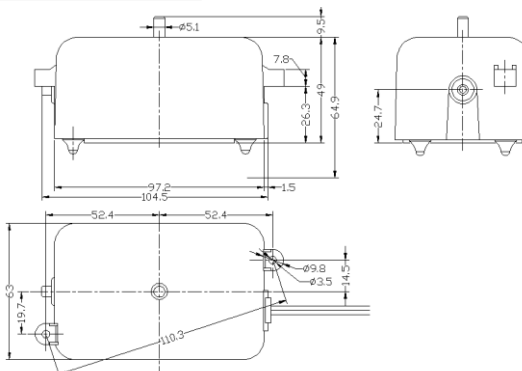




FLOW GRAPH

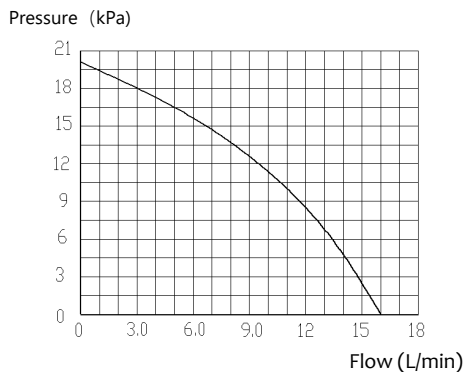


TECHNICAL DATA

Model No.	APM800SJ			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	65	39	600	300
Power (W)±15%	6	6	6	6
Flow (L/min)	16	16	16	16
pressure (kPa)	20	20	20	20
Noise (dB)	34	34	34	34
Use	Foot bath, ozone sterilization			

DIMENSIONS

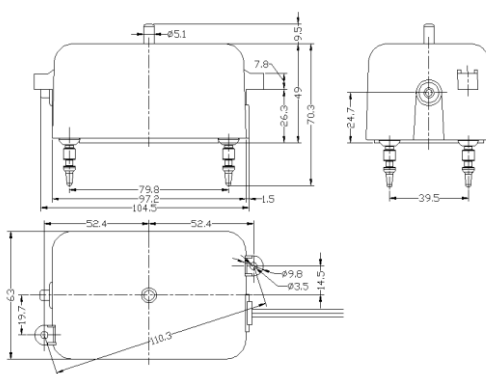


FLOW GRAPH

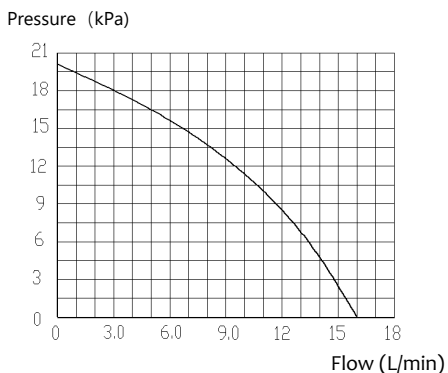

TECHNICAL DATA


Model No.	APM800J			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	65	39	600	300
Power (W)±15%	6	6	6	6
Flow (L/min)	16	16	16	16
pressure (kPa)	20	20	20	20
Noise (dB)	34	34	34	34
Use	Foot bath, Ozone sterilization ,Medical machinery			

DIMENSIONS

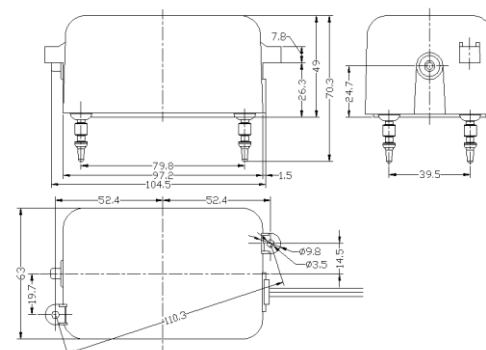




FLOW GRAPH

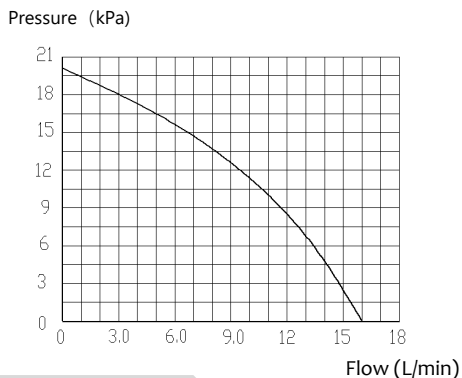


TECHNICAL DATA

Model No.	APM801			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	65	39	600	300
Power (W)±15%	6	6	6	6
Flow (L/min)	16	16	16	16
pressure (kPa)	20	20	20	20
Noise (dB)	34	34	34	34
Use	Foot bath, ozone disinfection , Medical machinery			

DIMENSIONS

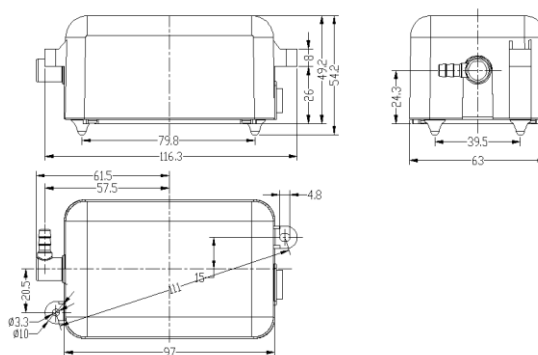


FLOW GRAPH

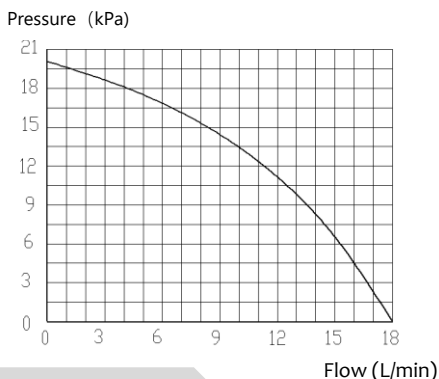

TECHNICAL DATA


Model No.	APM808			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	80	40	700	350
Power (W)±15%	6,5	6,5	6,5	6,5
Flow (L/min)	18	18	18	18
pressure (kPa)	20	20	20	20
Noise (dB)	36	36	36	36
Use	Foot bath, ozone disinfection , Medical machinery			

DIMENSIONS

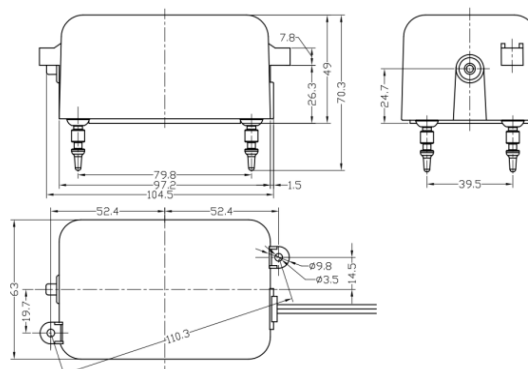




FLOW GRAPH

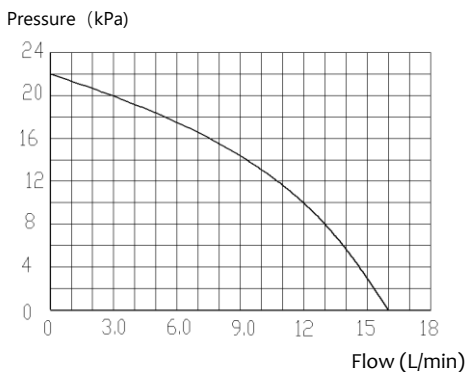


TECHNICAL DATA

Model No.	APM820			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	80	40	700	350
Power (W)±15%	6,5	6,5	6,5	6,5
Flow (L/min)	16	16	16	16
pressure (kPa)	22	22	22	22
Noise (dB)	36	36	36	36
Use	Foot bath, ozone disinfection , Medical machinery			

DIMENSIONS

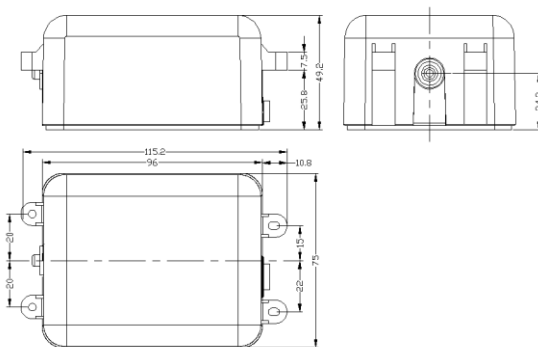


FLOW GRAPH

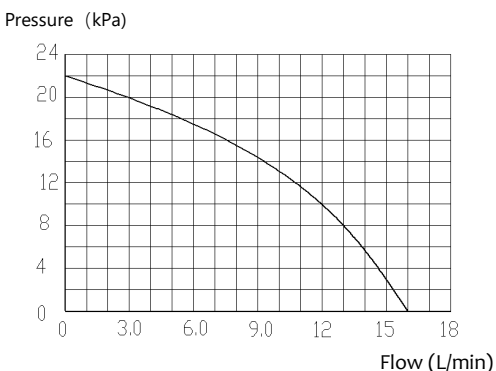

TECHNICAL DATA


Model No.	APM820S			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	80	40	700	350
Power (W)±15%	6,5	6,5	6,5	6,5
Flow (L/min)	16	16	16	16
pressure (kPa)	22	22	22	22
Noise (dB)	36	36	36	36
Use	Foot bath, ozone disinfection , Medical machinery			

DIMENSIONS

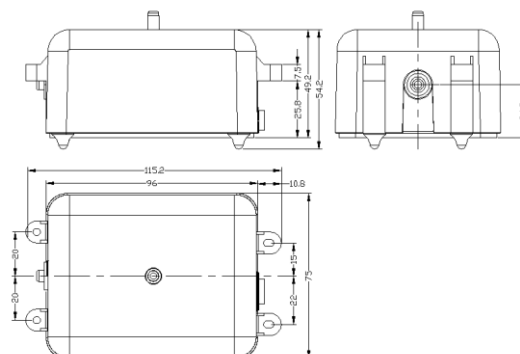




FLOW GRAPH

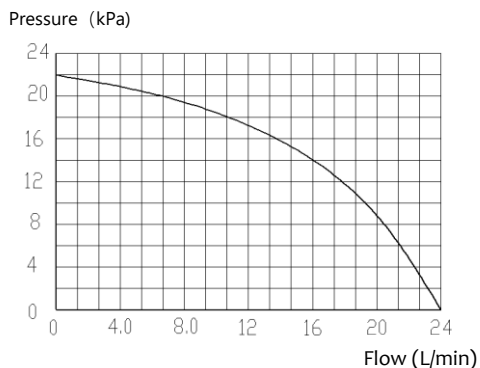


TECHNICAL DATA

Model No.	APM828			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	80	40	700	350
Power (W)±15%	6,5	6,5	6,5	6,5
Flow (L/min)	24	24	24	24
pressure (kPa)	22	22	22	22
Noise (dB)	36	36	36	36
Use	Foot bath, ozone disinfection , Medical machinery			

DIMENSIONS

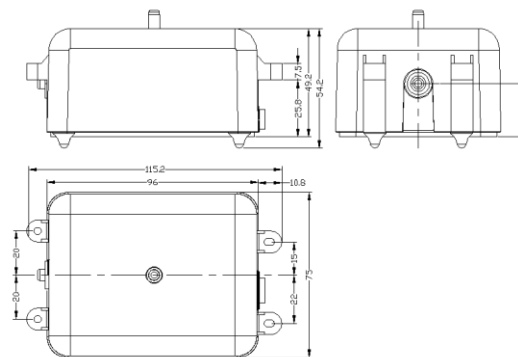


FLOW GRAPH

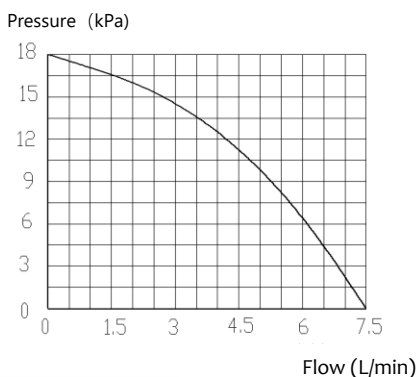

TECHNICAL DATA


Model No.	APM860			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	60	50		
Current (mA)±15%	43	20	360	190
Power (W)±15%	4,7	4,6		
Flow (L/min)	7,5	7,5	7	7
pressure (kPa)	18	18	16	16
Noise (dB)				
Use	Foot basin			

DIMENSIONS

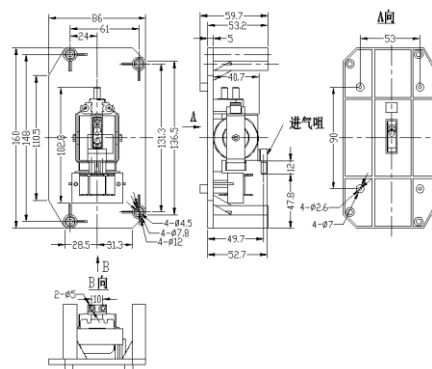




FLOW GRAPH

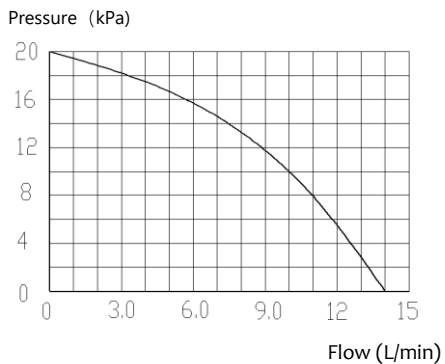


TECHNICAL DATA

Model No.	APM890			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	65	39	600	300
Power (W)±15%	6	6	6	6
Flow (L/min)	14	14	14	14
pressure (kPa)	20	20	20	20
Noise (dB)	32	32	32	32
Use	Ozone sterilization, medical machinery			

DIMENSIONS

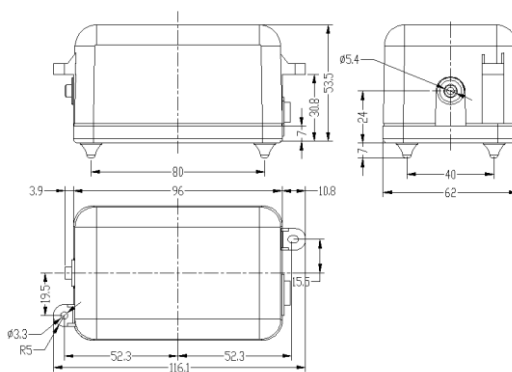


FLOW GRAPH

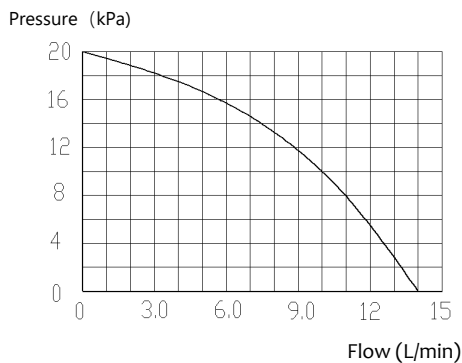

TECHNICAL DATA


Model No.	APM890J			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	65	39	600	300
Power (W)±15%	6	6	6	6
Flow (L/min)	14	14	14	14
pressure (kPa)	20	20	20	20
Noise (dB)	32	32	32	32
Use	Ozone sterilization, medical machinery			

DIMENSIONS

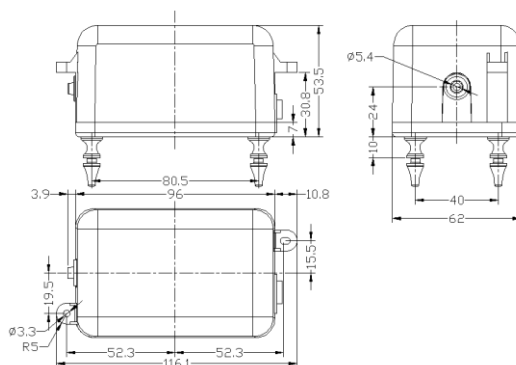




FLOW GRAPH

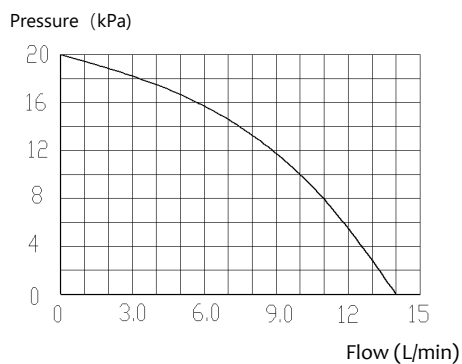


TECHNICAL DATA

Model No.	APM892			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	65	39	600	300
Power (W)±15%	6	6	6	6
Flow (L/min)	14	14	14	14
pressure (kPa)	20	20	20	20
Noise (dB)	32	32	32	32
Use	Medical machinery			

DIMENSIONS

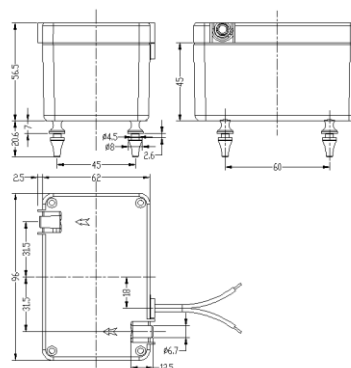


FLOW GRAPH

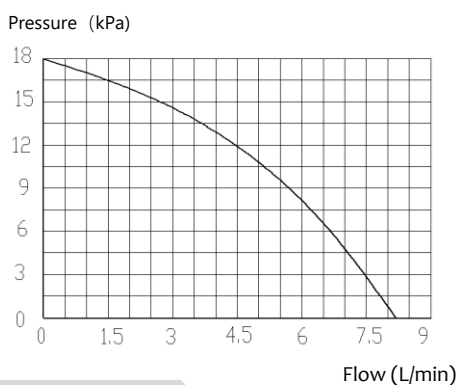

TECHNICAL DATA


Model No.	APM893			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	60	30	530	265
Power (W)±15%	4,6	4,6		
Flow (L/min)	8	8	8	8
pressure (kPa)	18	18	18	18
Noise (dB)	32	32	32	32
Use	Medical machinery			

DIMENSIONS

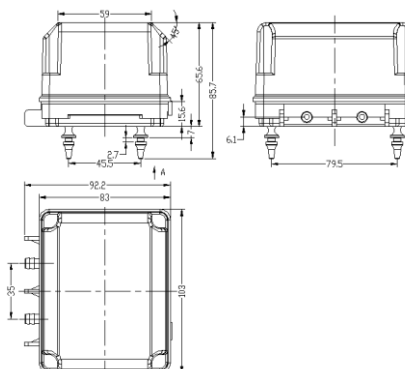




FLOW GRAPH

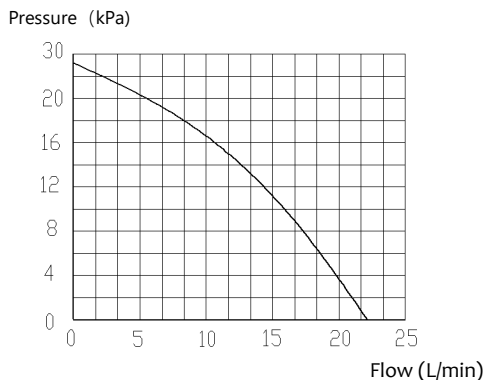


TECHNICAL DATA

Model No.	APM895			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	70	43	460	230
Power (W)±15%	8,2	8,2	8,2	8,2
Flow (L/min)	22	22	22	22
pressure (kPa)	28	28	28	28
Noise (dB)	34	34	34	34
Use	Massage equipment			

DIMENSIONS

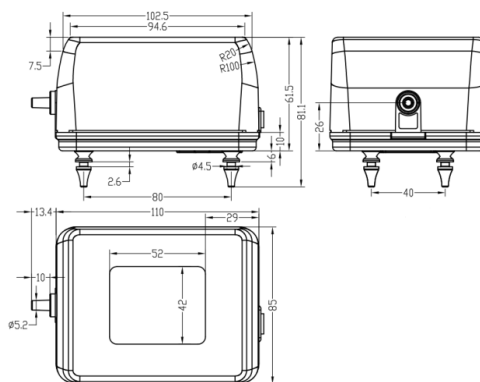


FLOW GRAPH

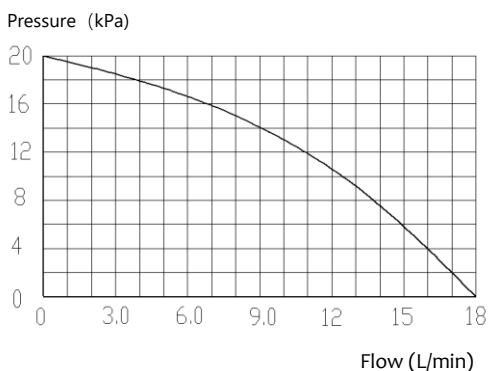

TECHNICAL DATA


Model No.	APM898			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	65	39	600	300
Power (W)±15%	6,5	6,5	6,5	6,5
Flow (L/min)	18	18	18	18
pressure (kPa)	20	20	20	20
Noise (dB)	33	33	33	33
Use	medical machinery			

DIMENSIONS

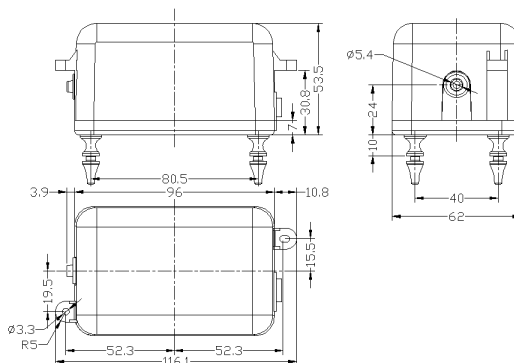




FLOW GRAPH

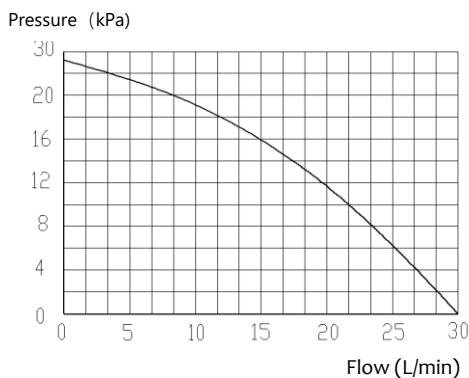


TECHNICAL DATA

Model No.	APM900			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	220	109	1900	930
Power (W)±15%	20	20		
Flow (L/min)	30	30	27	27
pressure (kPa)	27	27	26	26
Noise (dB)	45	45	45	45
Use	Gas stoves			

DIMENSIONS

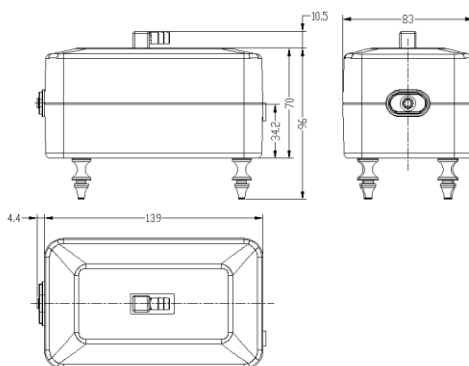


FLOW GRAPH

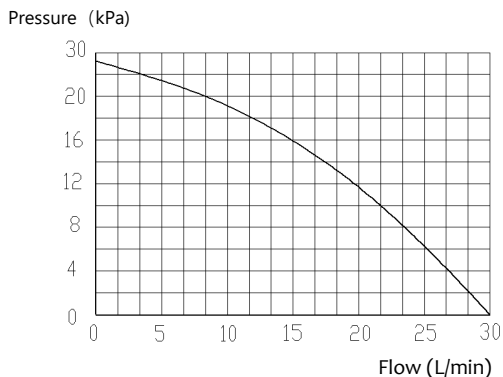

TECHNICAL DATA


Model No.	APM900J			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	220	109	1900	930
Power (W)±15%	20	20		
Flow (L/min)	30	30	27	27
pressure (kPa)	27	27	26	26
Noise (dB)	45	45	45	45
Use	Gas stoves			

DIMENSIONS

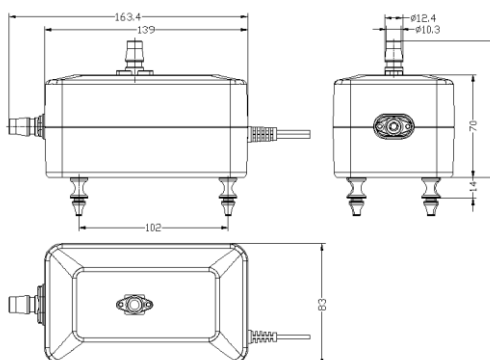




FLOW GRAPH

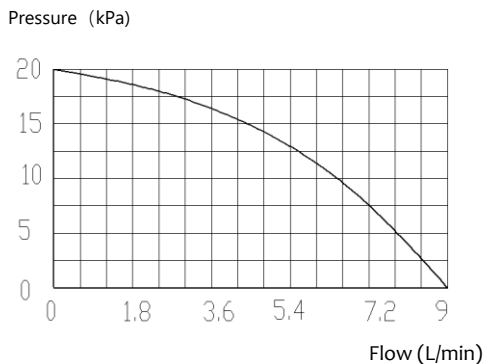


TECHNICAL DATA

Model No.	APM901			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	60	50		
Current (mA)±15%	36	36	430	270
Power (W)±15%	4,3	4,5		
Flow (L/min)	9	9	9	9
pressure (kPa)	20	20	20	20
Noise (dB)	36	35	35	35
Use	Medical machinery			

DIMENSIONS

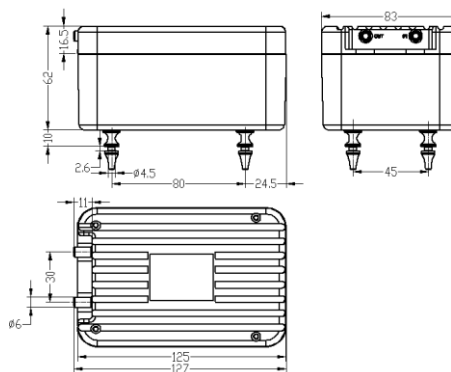


FLOW GRAPH

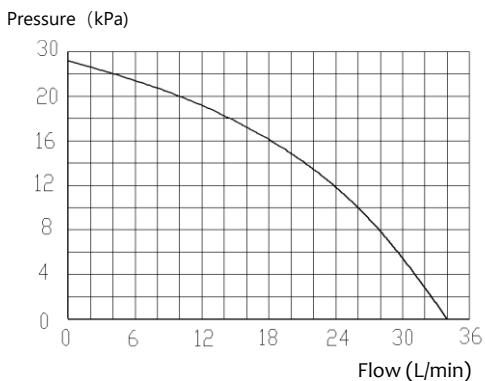

TECHNICAL DATA


Model No.	APM996			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	220	109	1900	930
Power (W)±15%	20	20		
Flow (L/min)	34	34	34	34
pressure (kPa)	27	27	26	26
Noise (dB)	45	45	45	45
Use	Gas stoves			

DIMENSIONS

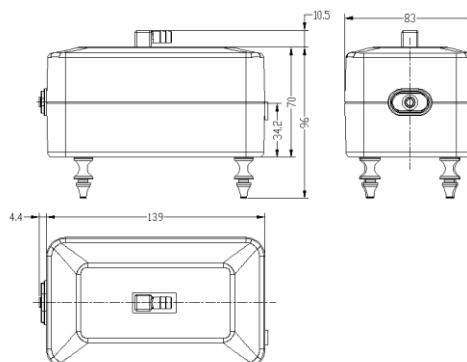




FLOW GRAPH

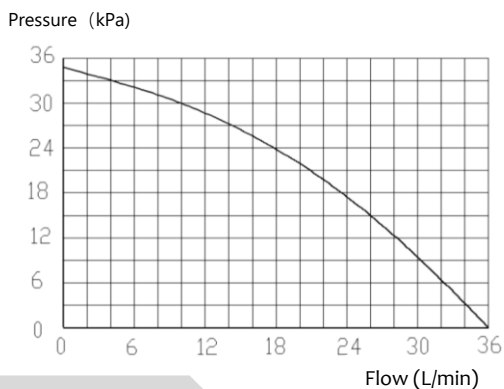


TECHNICAL DATA

Model No.	APM996B			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	220	109	1900	930
Power (W)±15%	20	20		
Flow (L/min)	34	34	34	34
pressure (kPa)	32	32	32	32
Noise (dB)	45	45	45	45
Use	Gas stoves			

DIMENSIONS

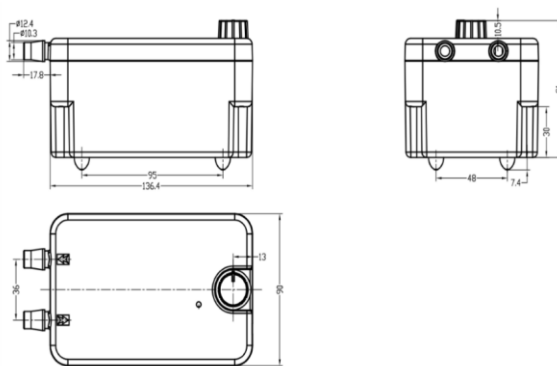


FLOW GRAPH

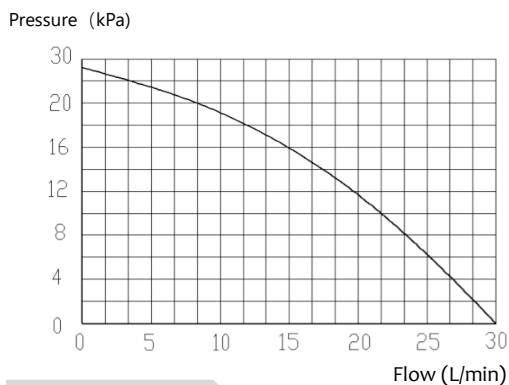

TECHNICAL DATA


Model No.	APM998			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	220	109	1900	930
Power (W)±15%	20	20		
Flow (L/min)	30	30	27	27
pressure (kPa)	27	27	26	26
Noise (dB)	35	35	35	35
Use	Medical machinery			

DIMENSIONS

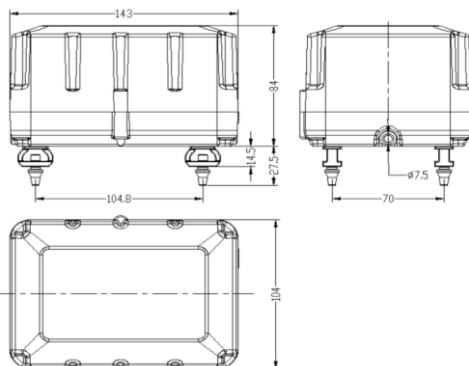




FLOW GRAPH

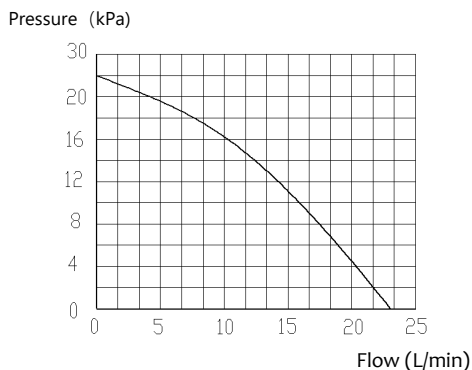


TECHNICAL DATA

Model No.	APM1000			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	110	52	560	280
Power (W)±15%	10	10	10	10
Flow (L/min)	23	23	23	23
pressure (kPa)	25	25	25	25
Noise (dB)	32	32	32	32
Use	Aquarium, perfume machine			

DIMENSIONS

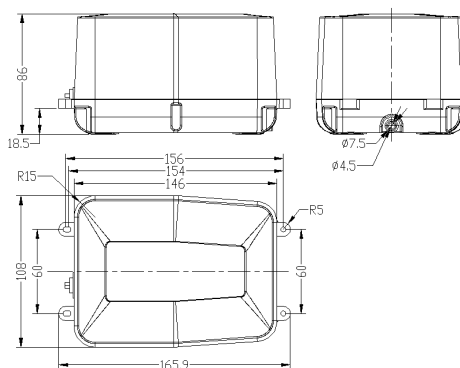


FLOW GRAPH

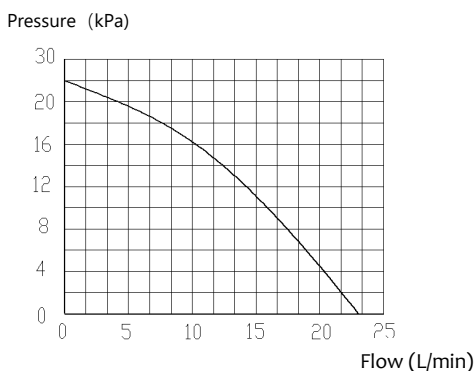

TECHNICAL DATA


Model No.	APM1012			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	110	52	560	280
Power (W)±15%	10	10	10	10
Flow (L/min)	23	23	23	23
pressure (kPa)	25	25	25	25
Noise (dB)	32	32	32	32
Use	Aquarium, perfume machine			

DIMENSIONS

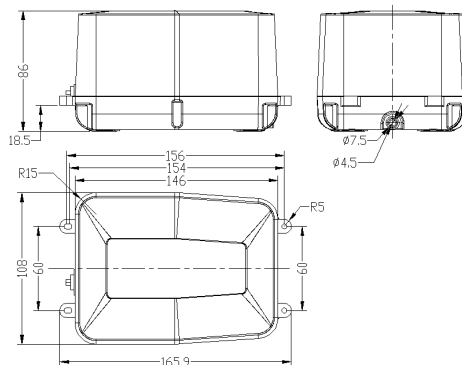




FLOW GRAPH

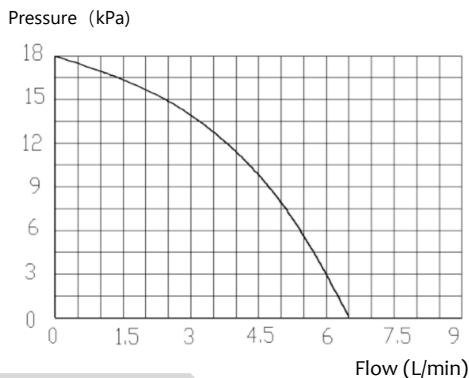


TECHNICAL DATA

Model No.	APMD800			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	79	36		
Power (W)±15%	6,3	6,3		
Flow (L/min)	6,5	6,5		
pressure (kPa)	18	18		
Noise (dB)	32	32		
Use	Medical machinery			

DIMENSIONS

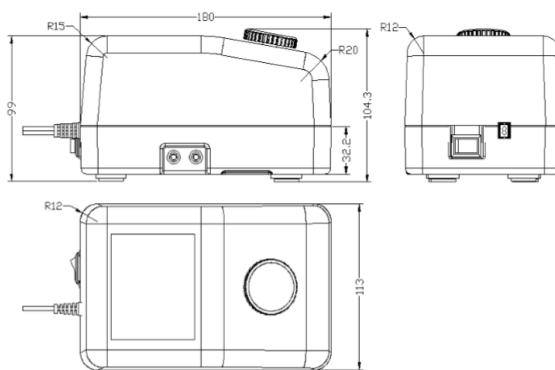


FLOW GRAPH

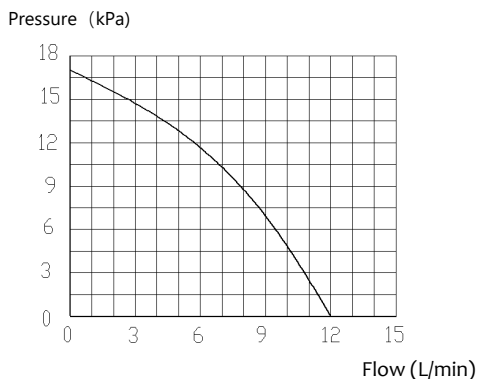

TECHNICAL DATA


Model No.	APMP20			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	96	48	900	450
Power (W)±15%	7	7	7	7
Flow (L/min)	12	12	12	12
pressure (kPa)	17	17	17	17
Noise (dB)	39	39	39	39
Use	Medical machinery Stage equipment			

DIMENSIONS

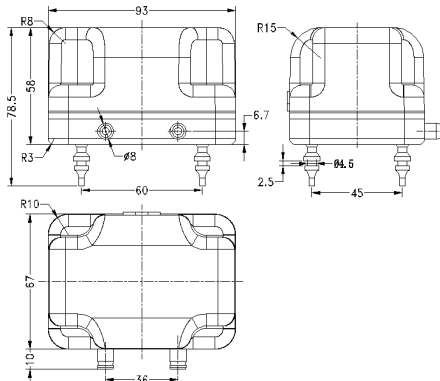




FLOW GRAPH

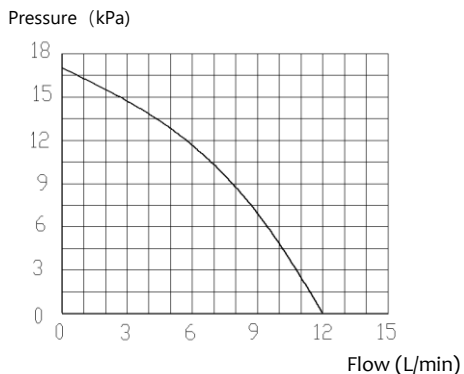


TECHNICAL DATA

Model No.	APMP21			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	96	48	900	450
Power (W)±15%	7	7	7	7
Flow (L/min)	12	12	12	12
pressure (kPa)	17	17	17	17
Noise (dB)	39	39	39	39
Use	Massage chairs, medical machinery			

DIMENSIONS

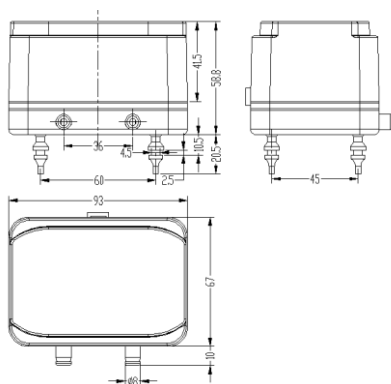


FLOW GRAPH

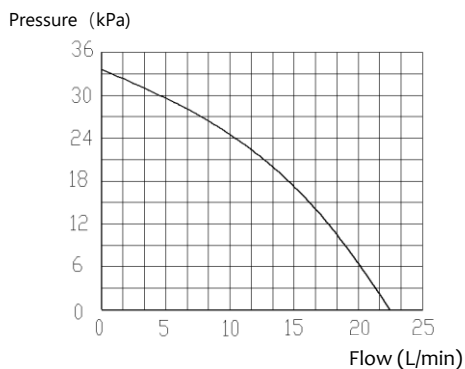

TECHNICAL DATA


Model No.	APMP26			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	150	75	1400	700
Power (W)±15%	14	14	14	14
Flow (L/min)	22	22	22	22
pressure (kPa)	34	34	34	34
Noise (dB)	38	38	38	38
Use	Massage chairs, medical machinery			

DIMENSIONS

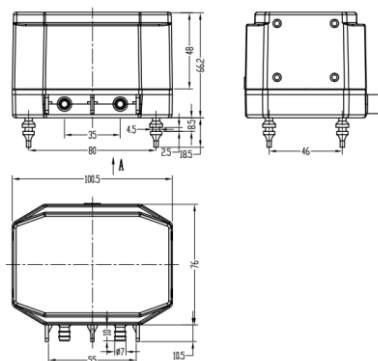




FLOW GRAPH

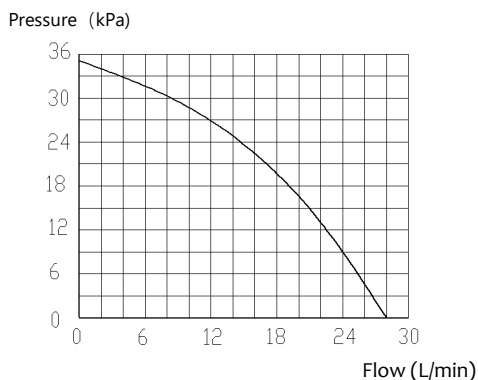


TECHNICAL DATA

Model No.	APMP50			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	156	153	1780	960
Power (W)±15%	20	22	20	22
Flow (L/min)	28	28	28	28
pressure (kPa)	35	35	35	35
Noise (dB)	38	38	38	38
Use	Gas pump, massage chair			

DIMENSIONS

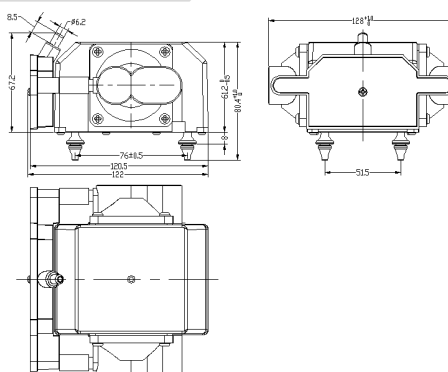


FLOW GRAPH

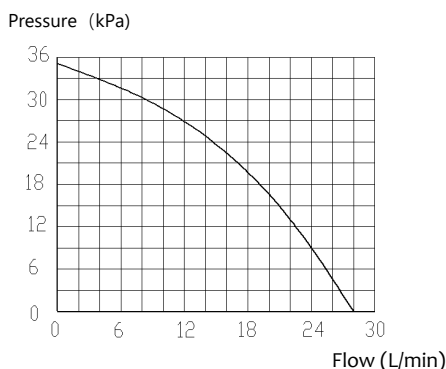

TECHNICAL DATA


Model No.	APMP51			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	156	153	1780	960
Power (W)±15%	20	22	20	22
Flow (L/min)	28	28	28	28
pressure (kPa)	35	35	35	35
Noise (dB)	38	38	38	38
Use	Gas pump, massage chair			

DIMENSIONS

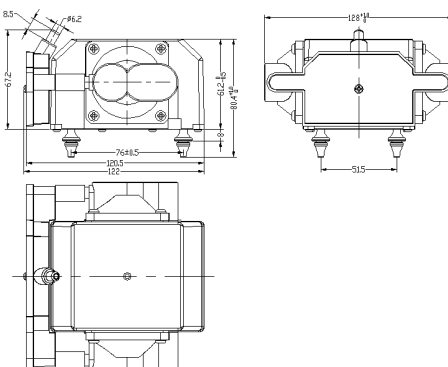




FLOW GRAPH

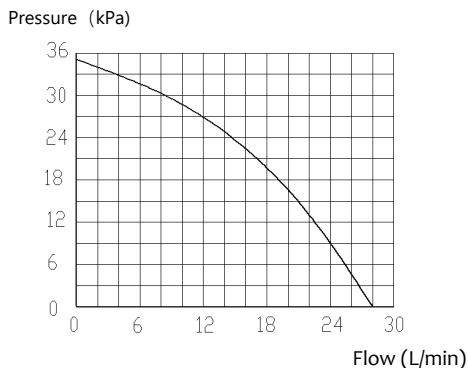


TECHNICAL DATA

Model No.	APMP50B			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	156	153	1780	960
Power (W)±15%	20	22	20	22
Flow (L/min)	28	28	28	28
pressure (kPa)	35	35	35	35
Noise (dB)	38	38	38	38
Use	Gas pump, massage chair			

DIMENSIONS

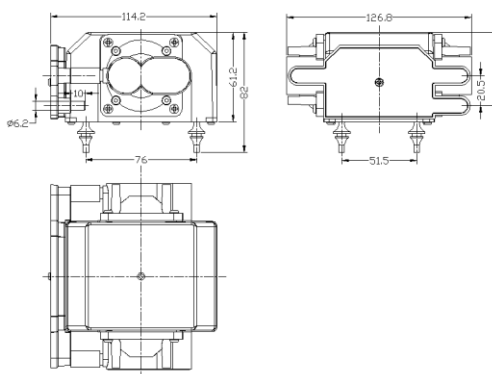


FLOW GRAPH

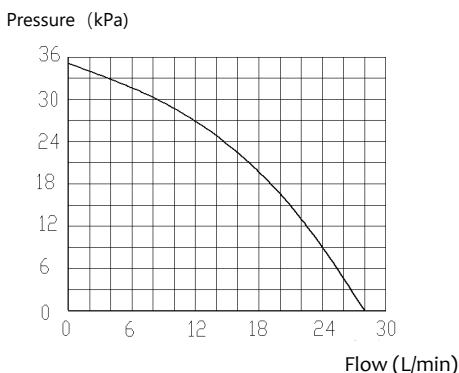

TECHNICAL DATA


Model No.	APMP50D			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	156	153	1780	960
Power (W)±15%	20	22	20	22
Flow (L/min)	15*2	15*2	15*2	15*2
pressure (kPa)	35	35	35	35
Noise (dB)	38	38	38	38
Use	Gas pump, massage chair			

DIMENSIONS

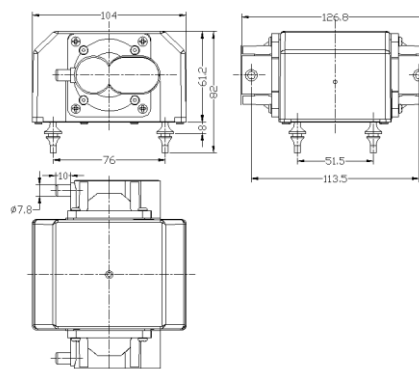




FLOW GRAPH

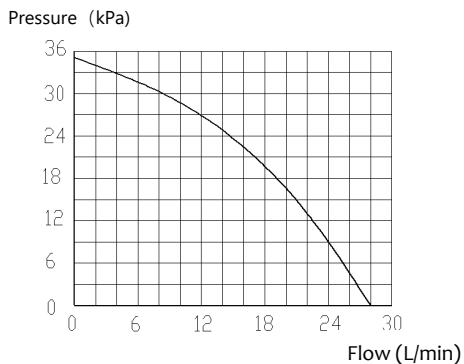


TECHNICAL DATA

Model No.	APMP53			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	156	153	1780	960
Power (W)±15%	20	22	20	22
Flow (L/min)	28	28	28	28
pressure (kPa)	35	35	35	35
Noise (dB)	38	38	38	38
Use	Aquarium			

DIMENSIONS

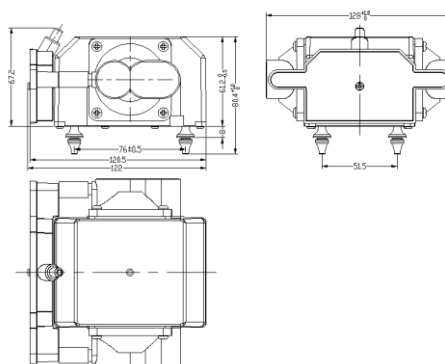


FLOW GRAPH

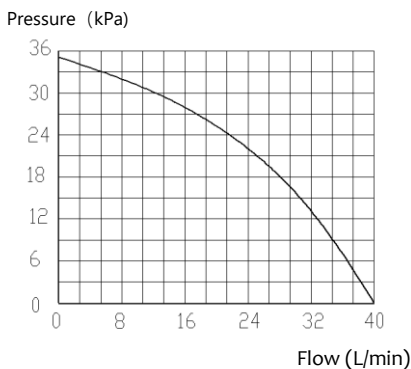

TECHNICAL DATA


Model No.	APMP56			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	240	120	2300	1150
Power (W)±15%	18	18	18	18
Flow (L/min)	40	40	40	40
pressure (kPa)	35	35	35	35
Noise (dB)	38	38	38	38
Use	Massage chair			

DIMENSIONS

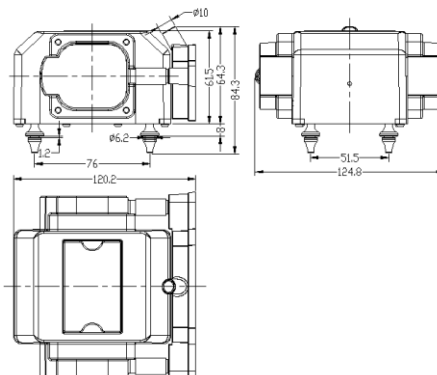




FLOW GRAPH

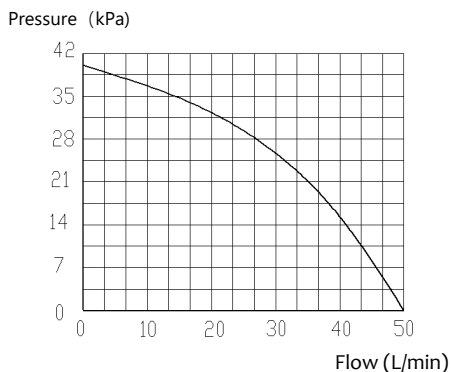


TECHNICAL DATA

Model No.	APMP60			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	660	330	4000	2000
Power (W)±15%	39	39,2	32	32
Flow (L/min)	50	50	42	42
pressure (kPa)	40	40	40	40
Noise (dB)	75	75	73	73
Use	Inflatable			

DIMENSIONS

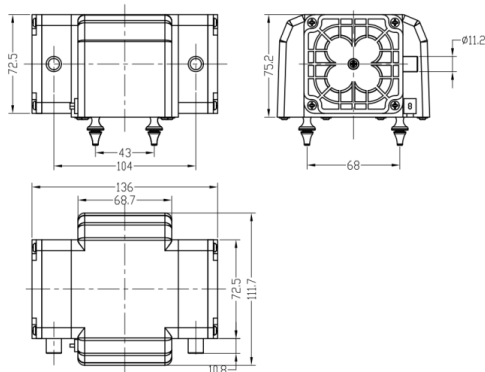


FLOW GRAPH

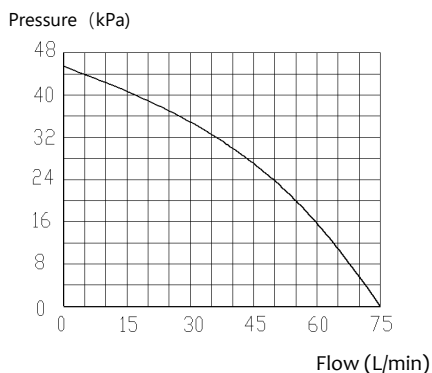

TECHNICAL DATA


Model No.	APMP80			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	844	466	4300	2600
Power (W)±15%	48	48	42	42
Flow (L/min)	75	75	65	65
pressure (kPa)	45	45	45	45
Noise (dB)	75	75	73	73
Use	Inflatable			

DIMENSIONS

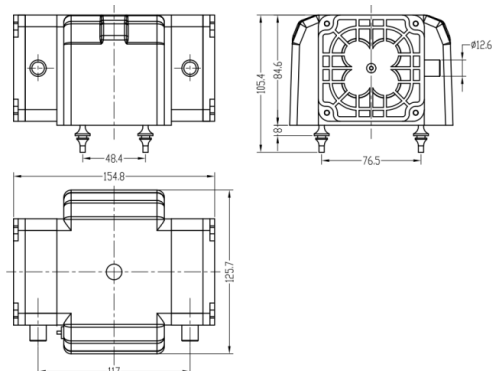




FLOW GRAPH

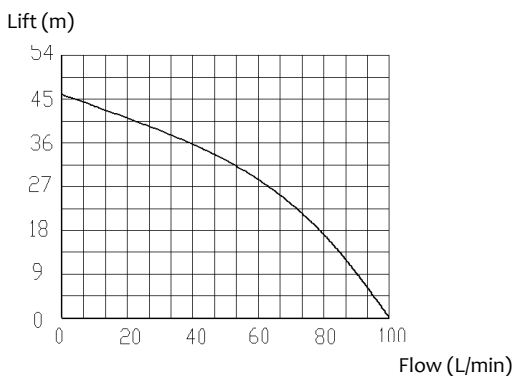


TECHNICAL DATA

Model No.	APM-P100			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	2100	1024	6000	300
Power (W)±15%	128	128	72	72
Flow (L/min)	100	100	80	80
pressure (kPa)	45	45	45	45
Noise (dB)	75	75	73	73
Use	Inflatable			

DIMENSIONS

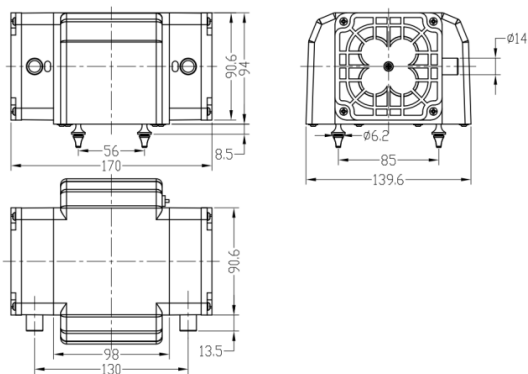


FLOW GRAPH

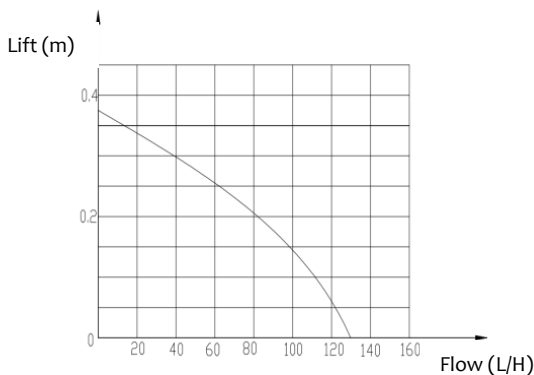

TECHNICAL DATA


Model No.	WP135			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)				
Current (mA)±15%			800	400
Power (W)±15%			9.6	9.6
Flow (L/min)			132	132
Lift (m)			3	3
Noise (dB)				
Use	Pet water dispenser, water cooler			

DIMENSIONS

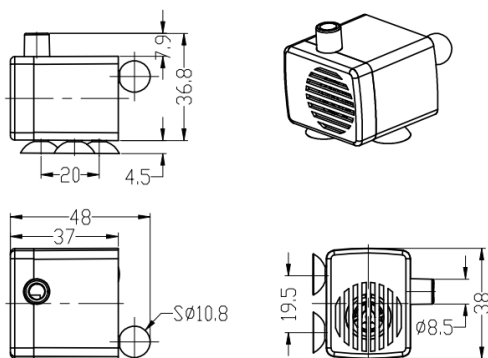




FLOW GRAPH

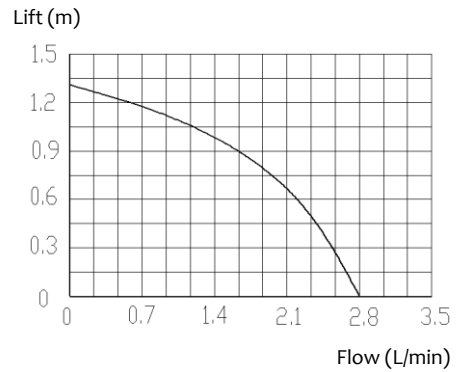


TECHNICAL DATA

Model No.	WP150			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)				
Current (mA)±15%			240	120
Power (W)±15%			2.8	2.8
Flow (L/min)			2.8	2.8
Lift (m)			1.3	1.3
Noise (dB)				
Use	Inflatable			

DIMENSIONS

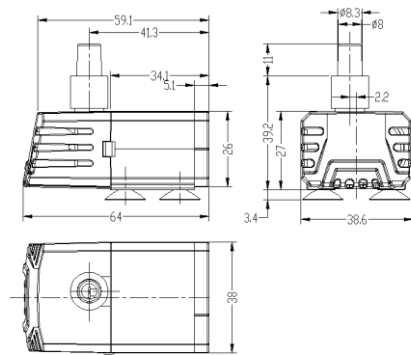


FLOW GRAPH

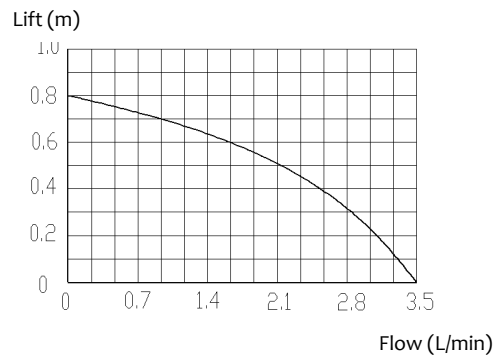

TECHNICAL DATA


Model No.	WP200			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	40	20	200	100
Power (W)±15%	3,5	3,5	2,4	2,4
Flow (L/min)	3,5	3,5	3	3
Lift (m)	0,8	0,8	0,8	0,8
Noise (dB)				
Use	Pet water dispenser, water cooler			

DIMENSIONS

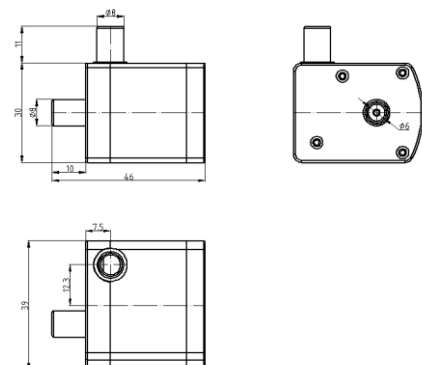




FLOW GRAPH

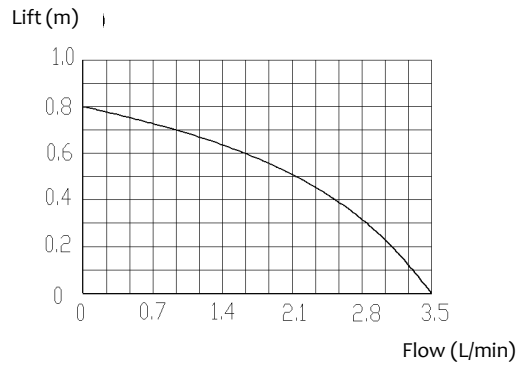


TECHNICAL DATA

Model No.	WP210			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	40	20	200	100
Power (W)±15%	3,5	3,5	2,4	2,4
Flow (L/min)	3,5	3,5	3	3
Lift (m)	0,8	0,8	0,8	0,8
Noise (dB)				
Use	Foot Tub			

DIMENSIONS

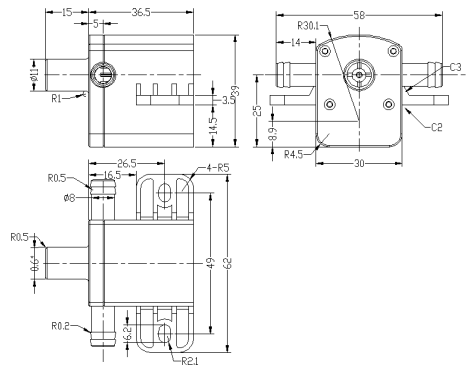


FLOW GRAPH

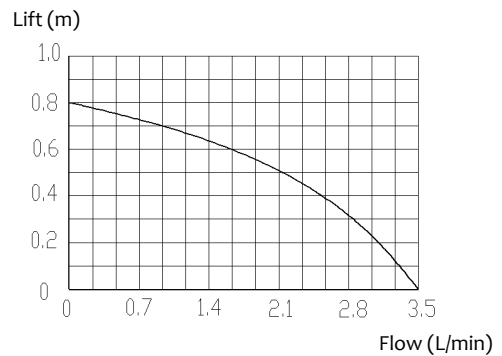

TECHNICAL DATA


Model No.	WP220			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	40	20	200	100
Power (W)±15%	3,5	3,5	2,4	2,4
Flow (L/min)	3,5	3,5	3	3
Lift (m)	0,8	0,8	0,8	0,8
Noise (dB)				
Use	Foot Tub			

DIMENSIONS

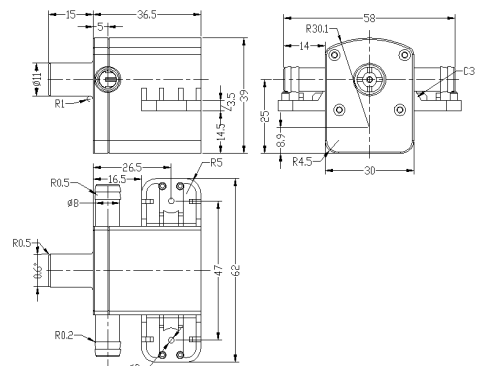




FLOW GRAPH

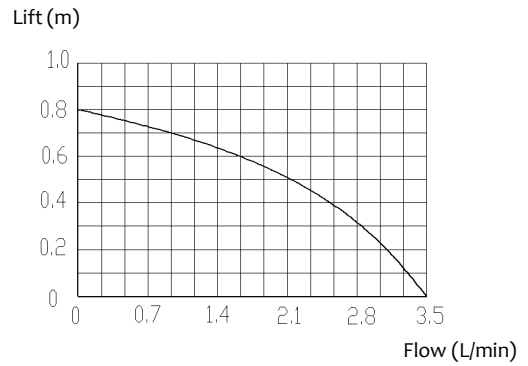


TECHNICAL DATA

Model No.	WP230			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	40	20	200	100
Power (W)±15%	3,5	3,5	2,4	2,4
Flow (L/min)	3,5	3,5	3	3
Lift (m)	0,8	0,8	0,8	0,8
Noise (dB)				
Use	Foot Tub			

DIMENSIONS

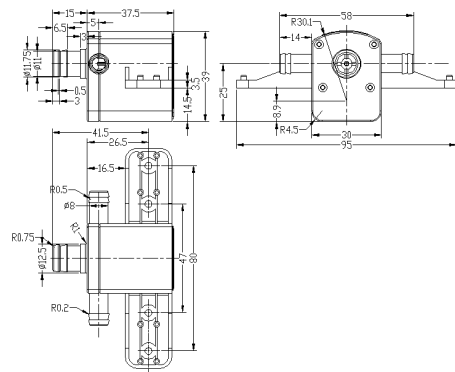


FLOW GRAPH

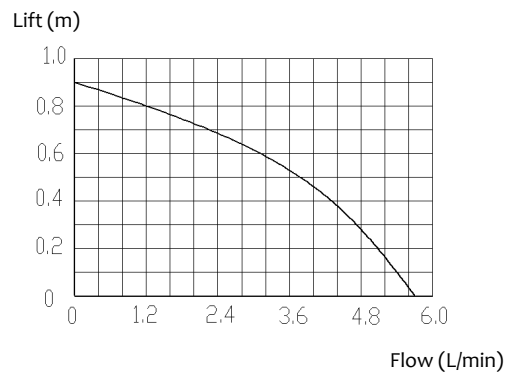

TECHNICAL DATA


Model No.	WP350			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	125	62		
Power (W)±15%	9,6	9,6		
Flow (L/min)	5,5	5,5		
Lift (m)	0,9	0,9		
Noise (dB)				
Use	Water cooler, water boiler			

DIMENSIONS

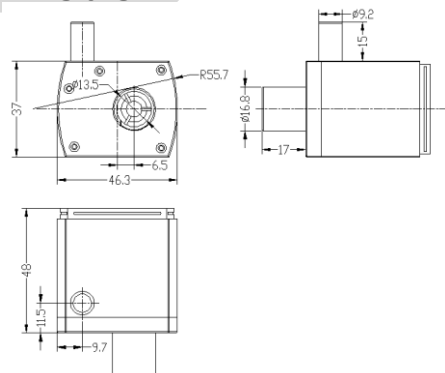




FLOW GRAPH

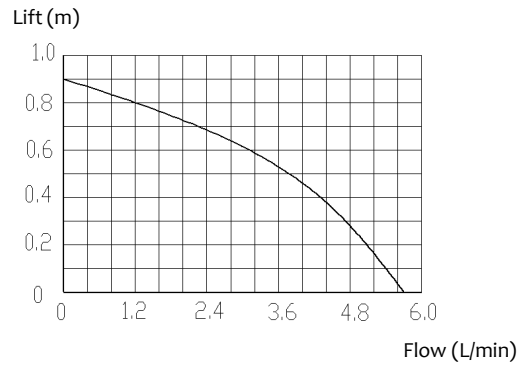


TECHNICAL DATA

Model No.	WP310			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	125	62		
Power (W)±15%	9,6	9,6		
Flow (L/min)	5,5	5,5		
Lift (m)	0,9	0,9		
Noise (dB)				
Use	Water cooling fan			

DIMENSIONS

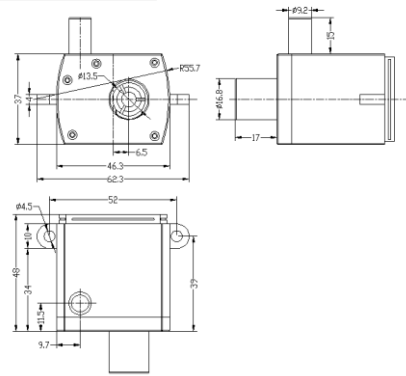


FLOW GRAPH

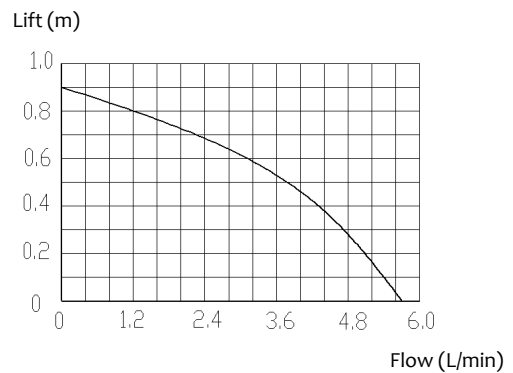

TECHNICAL DATA


Model No.	WP350			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	125	62		
Power (W)±15%	9,6	9,6		
Flow (L/min)	5,5	5,5		
Lift (m)	0,9	0,9		
Noise (dB)				
Use	Water-cooled fan, dishwasher, coffee machine			

DIMENSIONS

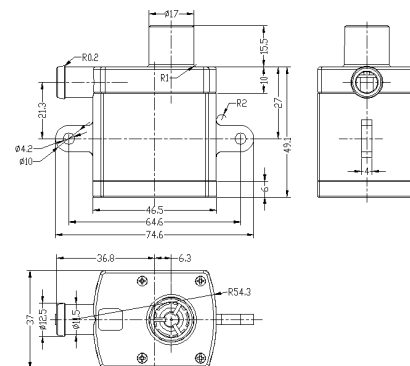




FLOW GRAPH

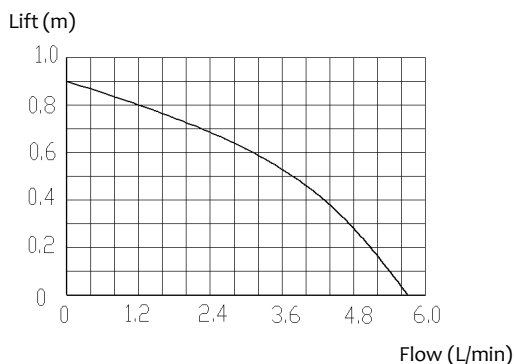


TECHNICAL DATA

Model No.	WP355			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	125	62		
Power (W)±15%	9,6	9,6		
Flow (L/min)	5,5	5,5		
Lift (m)	0,9	0,9		
Noise (dB)				
Use	Water cooling fan , coffee machine			

DIMENSIONS

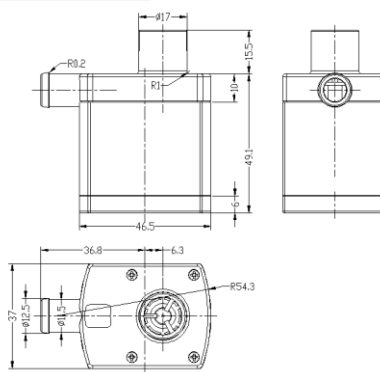


FLOW GRAPH

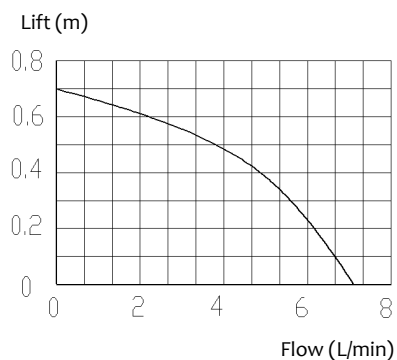

TECHNICAL DATA


Model No.	WP360			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	125	62		
Power (W)±15%	9,6	9,6		
Flow (L/min)	7,5	7,5		
Lift (m)	0,7	0,7		
Noise (dB)				
Use	bean sprout growing machine			

DIMENSIONS

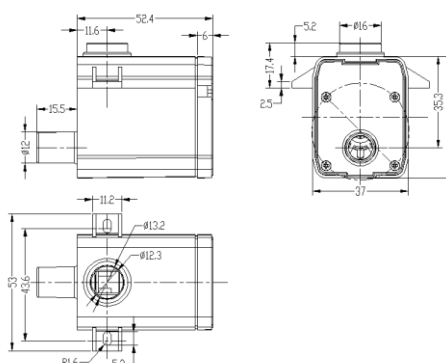




FLOW GRAPH

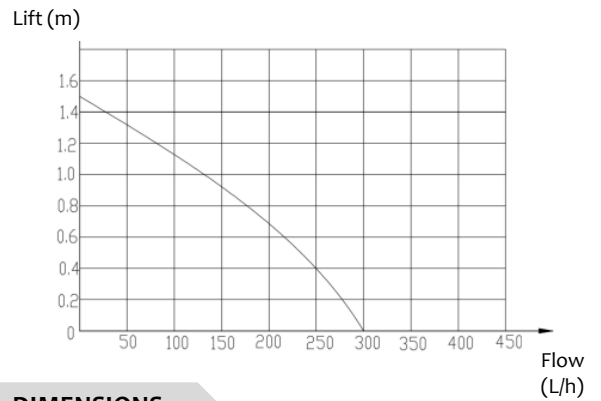


TECHNICAL DATA

Model No.	WP390			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	120	60		
Power (W)±15%	13,2	13,2		
Flow (L/min)	300	300		
Lift (m)	1,5	1,5		
Noise (dB)				
Use	Plumbing blanket			

DIMENSIONS

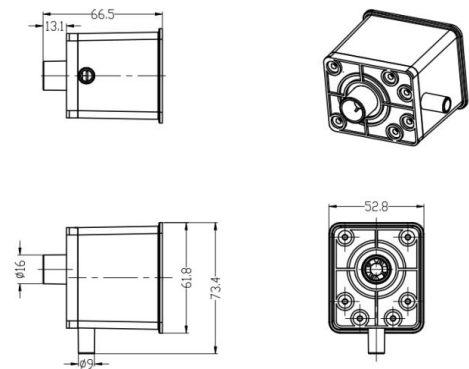


FLOW GRAPH

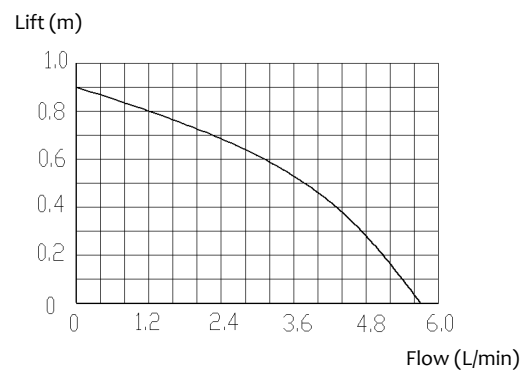

TECHNICAL DATA


Model No.	WP500			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	125	62	1050	520
Power (W)±15%	9,6	9,6		
Flow (L/min)	5,5	5,5	5	5
Lift (m)	0,9	0,9	0,8	0,8
Noise (dB)				
Use	Aquatic animals			

DIMENSIONS

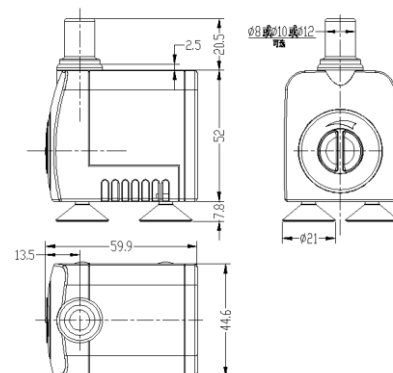




FLOW GRAPH

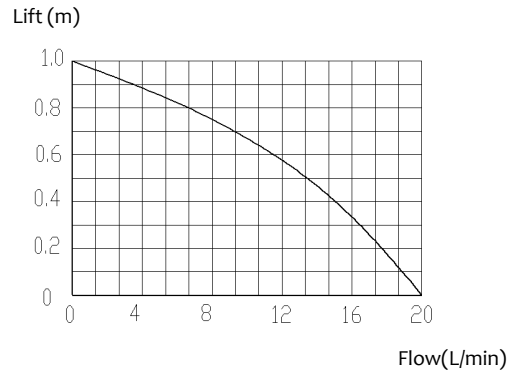


TECHNICAL DATA

Model No.	WP800			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	190	95		
Power (W)±15%	15	15		
Flow (L/min)	20	20		
Lift (m)	1	1		
Noise (dB)				
Use	Foot tub			

DIMENSIONS

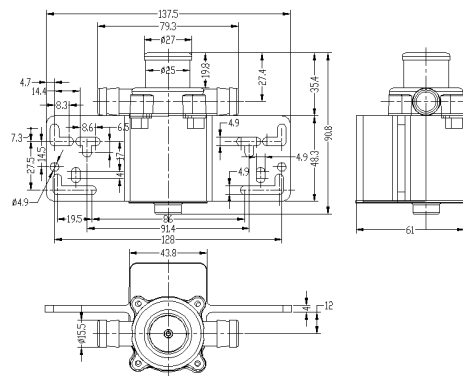


FLOW GRAPH

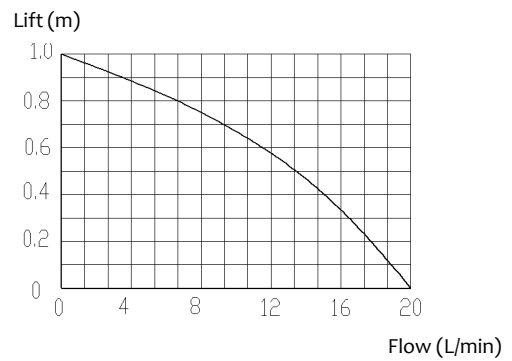

TECHNICAL DATA


Model No.	WP800 one in three out			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	190	95		
Power (W)±15%	15	15		
Flow (L/min)	20	20		
Lift (m)	1	1		
Noise (dB)				
Use	Foot tub			

DIMENSIONS

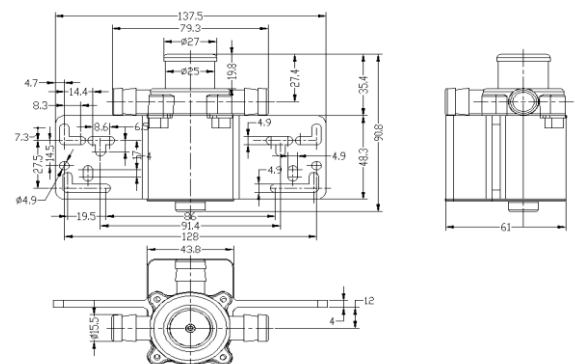




FLOW GRAPH

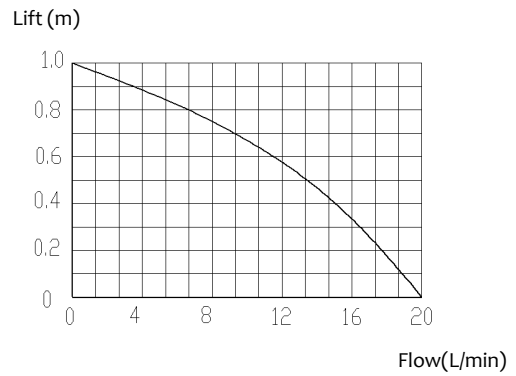


TECHNICAL DATA

Model No.	WP810			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	190	95		
Power (W)±15%	15	15		
Flow (L/min)	20	20		
Lift (m)	1	1		
Noise (dB)				
Use	Foot tub			

DIMENSIONS

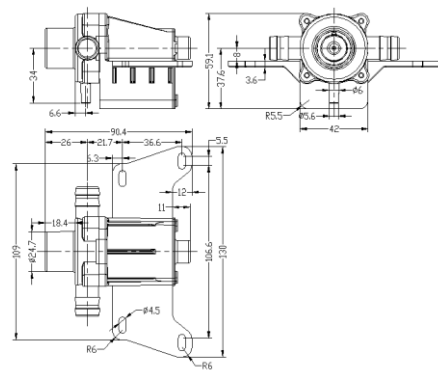


FLOW GRAPH

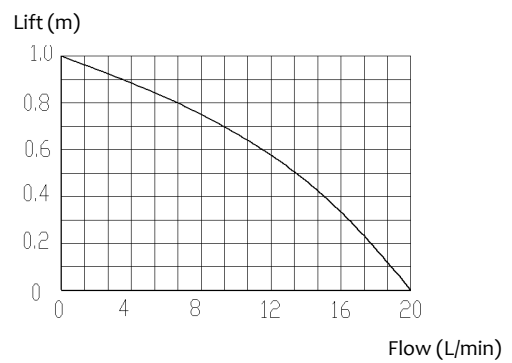

TECHNICAL DATA


Model No.	WP820			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	190	95		
Power (W)±15%	15	15		
Flow (L/min)	20	20		
Lift (m)	1	1		
Noise (dB)				
Use	Foot tub			

DIMENSIONS

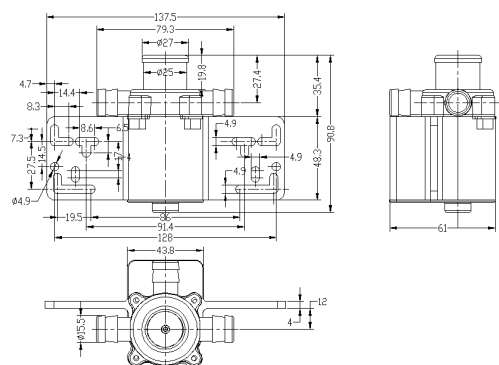




FLOW GRAPH

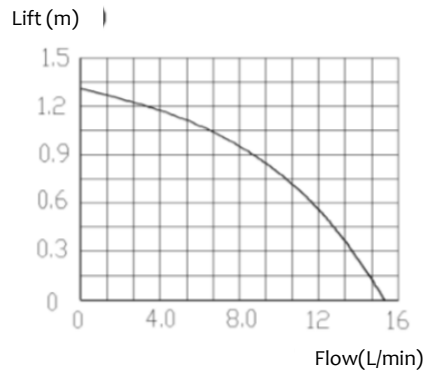


TECHNICAL DATA

Model No.	WP850			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	190	95		
Power (W)±15%	14	14		
Flow (L/min)	15	15		
Lift (m)	1,3	1,3		
Noise (dB)				
Use	Foot tub			

DIMENSIONS

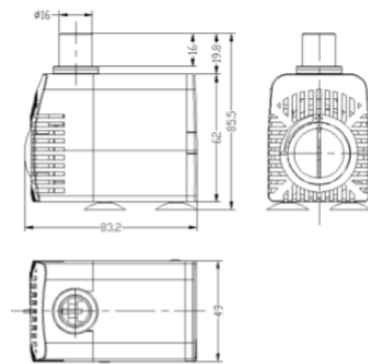


FLOW GRAPH

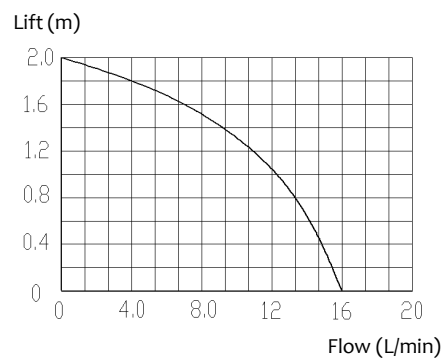

TECHNICAL DATA


Model No.	WP861			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	280	149	900	440
Power (W)±15%	18,5	18,5		
Flow (L/min)	16	16	7,2	7,2
Lift (m)	2	2	1,8	1,9
Noise (dB)				
Use	Fish tank			

DIMENSIONS

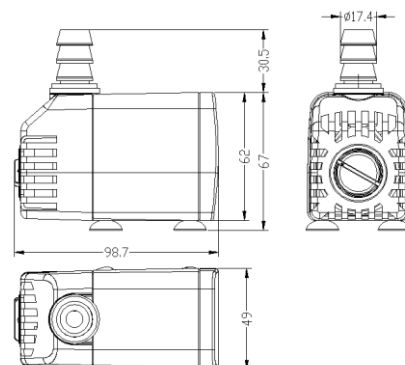




FLOW GRAPH

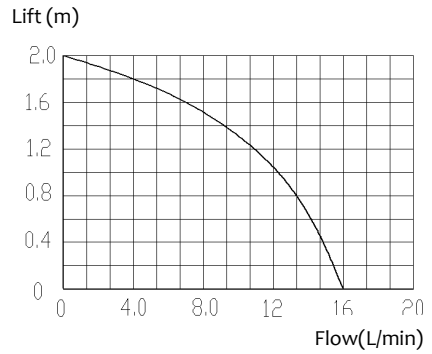


TECHNICAL DATA

Model No.	WP862			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	190	95		
Power (W)±15%	14	14		
Flow (L/min)	15	15		
Lift (m)	1,3	1,3		
Noise (dB)				
Use	Foot tub			

DIMENSIONS

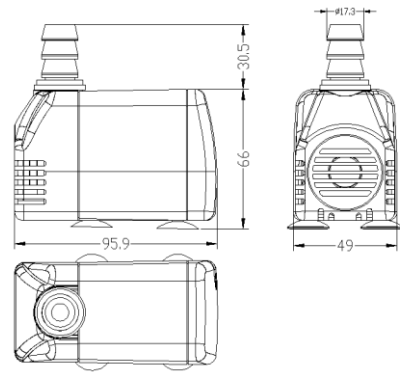


FLOW GRAPH

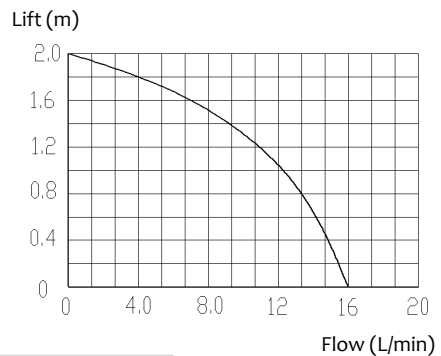

TECHNICAL DATA


Model No.	WP866			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	220	149	900	440
Power (W)±15%	17,3	18,5		
Flow (L/min)	16	16	7,2	7,2
Lift (m)	2	2	1,9	1,9
Noise (dB)				
Use	Fish tank			

DIMENSIONS

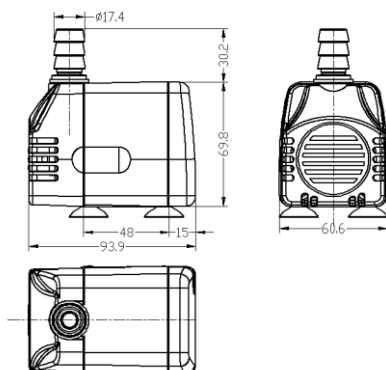




FLOW GRAPH

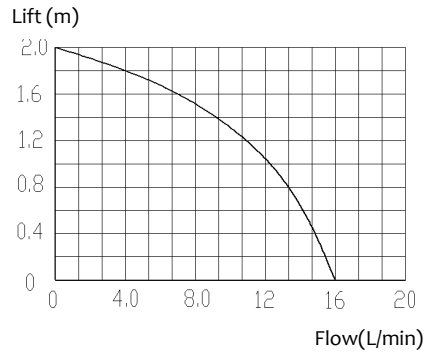


TECHNICAL DATA

Model No.	WP880			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	60	50		
Current (mA)±15%	202	149	900	440
Power (W)±15%	17,3	18,5		
Flow (L/min)	16	16	7,2	7,2
Lift (m)	2	2	1,8	1,9
Noise (dB)				
Use	Fish tank			

DIMENSIONS

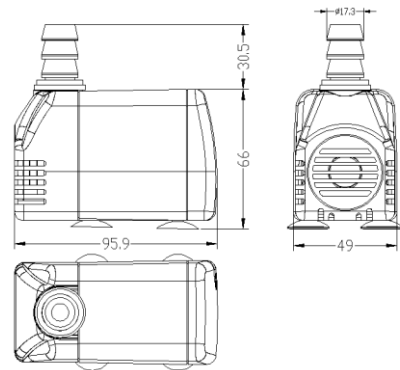


FLOW GRAPH

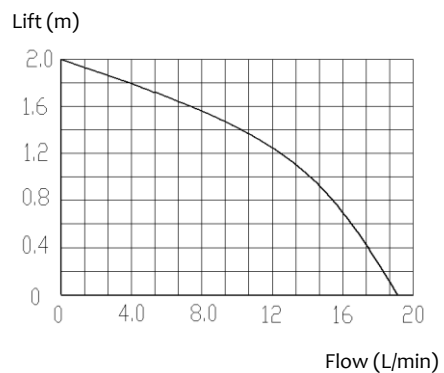

TECHNICAL DATA


Model No.	WP3100			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	600	312		
Power (W)±15%	29,5	30,5		
Flow (L/min)	19	19		
Lift (m)	2	2		
Noise (dB)				
Use	Fish tank			

DIMENSIONS

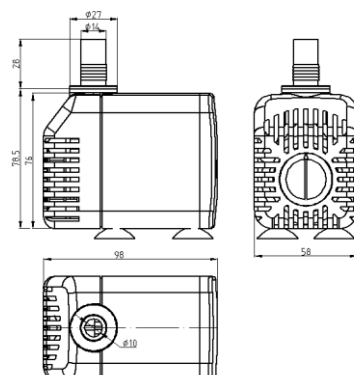




FLOW GRAPH

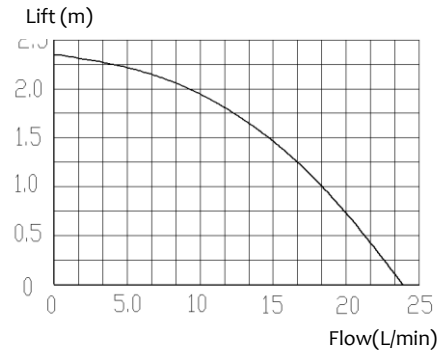


TECHNICAL DATA

Model No.	WP3200			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	600	312		
Power (W)±15%	29,5	30,5		
Flow (L/min)	23,4	24		
Lift (m)	2,4	2,4		
Noise (dB)				
Use	Fish tank			

DIMENSIONS

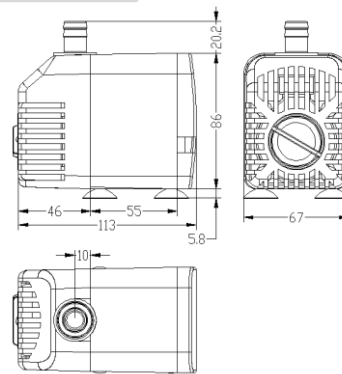


FLOW GRAPH

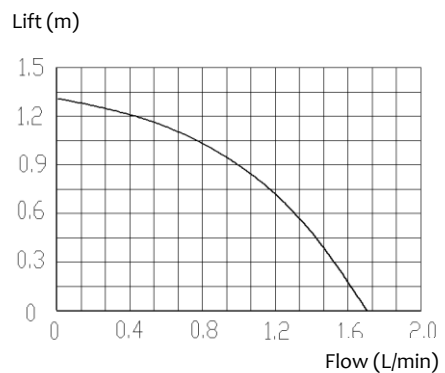

TECHNICAL DATA


Model No.	AWP2300			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)				
Current (mA)±15%			300	150
Power (W)±15%			3,6	3,6
Flow (L/min)			1,7	1,7
Lift (m)			1,3	1,3
Noise (dB)				
Use	Water cooling machine			

DIMENSIONS

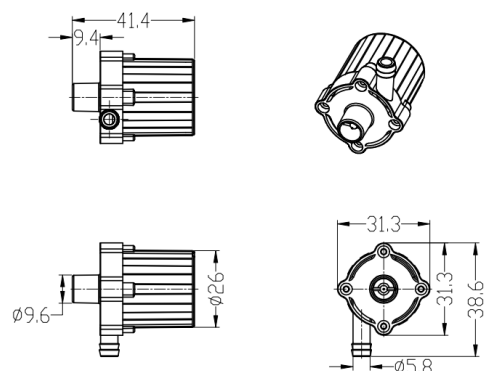




FLOW GRAPH

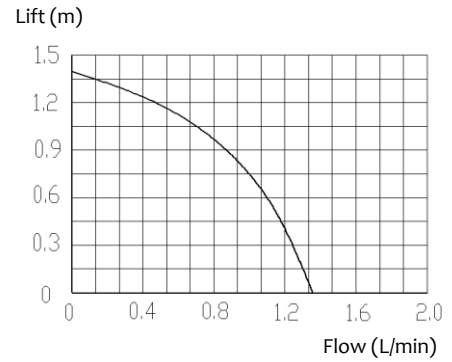


TECHNICAL DATA

Model No.	AWP2310			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)				
Current (mA)±15%			300	150
Power (W)±15%			3,6	3,6
Flow (L/min)			1,3	1,3
Lift (m)			1,4	1,4
Noise (dB)				
Use	Milk machine			

DIMENSIONS

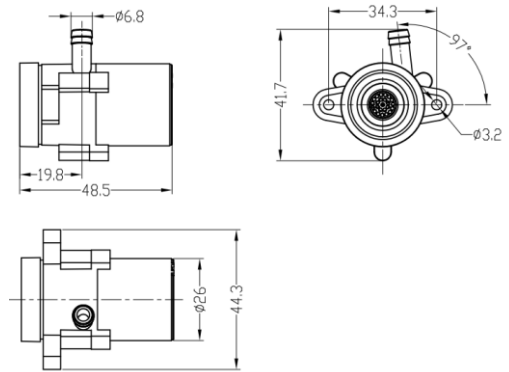


FLOW GRAPH

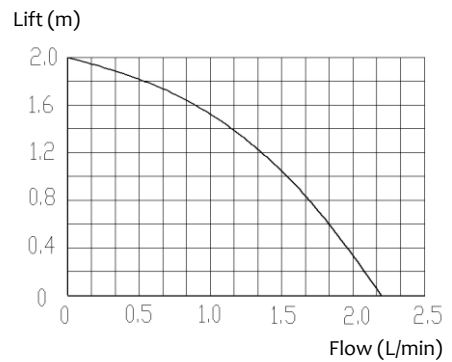

TECHNICAL DATA


Model No.	AWP3000			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)				
Current (mA)±15%			400	210
Power (W)±15%				
Flow (L/min)			2,2	2,2
Lift (m)			2	2
Noise (dB)				
Use	Water cooler			

DIMENSIONS

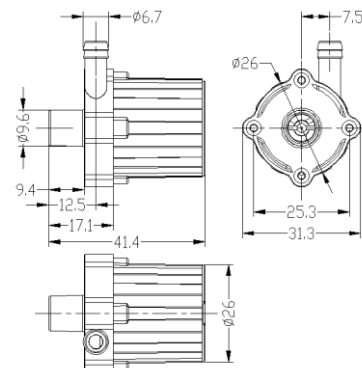




FLOW GRAPH

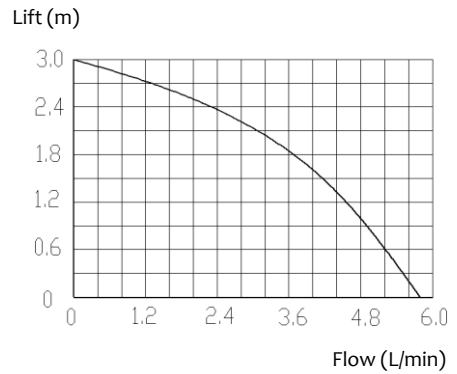


TECHNICAL DATA

Model No.	AWP3200			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)				
Current (mA)±15%			1050	500
Power (W)±15%				
Flow (L/min)			5,7	5,7
Lift (m)			3	3
Noise (dB)				
Use	water-cooling machine			

DIMENSIONS

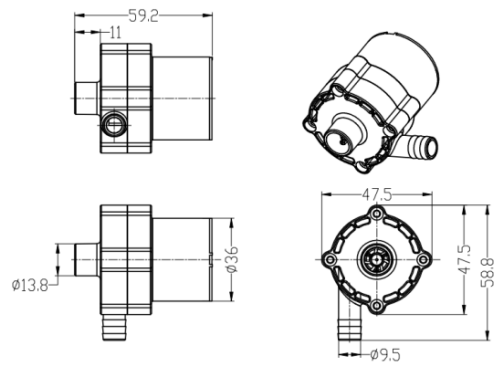


FLOW GRAPH

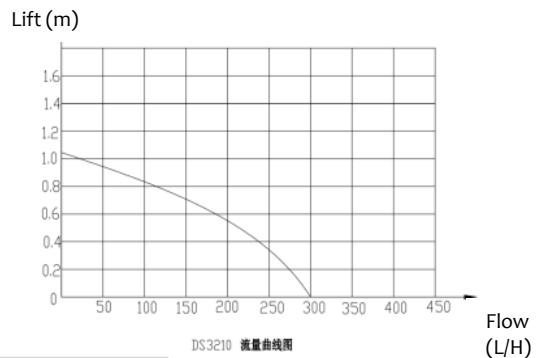

TECHNICAL DATA


Model No.	AWP3210			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)				
Current (mA)±15%			200	100
Power (W)±15%			2,4	2,4
Flow (L/min)			300	300
Lift (m)			1,1	1,1
Noise (dB)				
Use	Water heating blanket			

DIMENSIONS

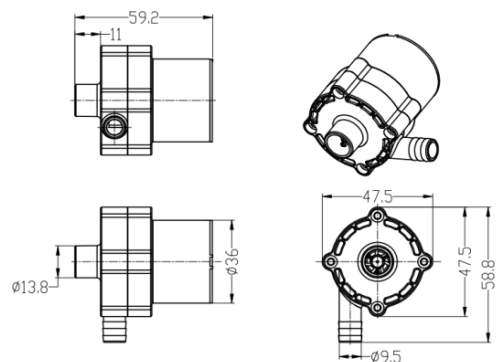




FLOW GRAPH

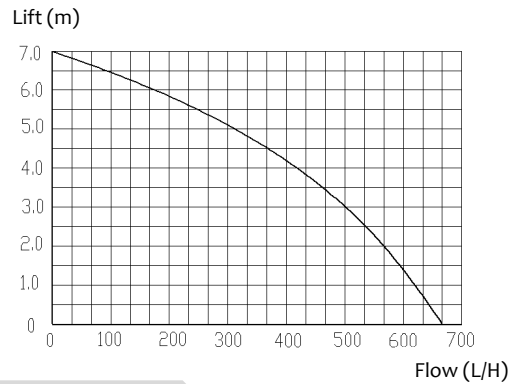


TECHNICAL DATA

Model No.	AWP3500			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)				
Current (mA)±15%			2180	1000
Power (W)±15%			26	24
Flow (L/min)			660	660
Lift (m)			7	7
Noise (dB)				
Use	Mobile shower machine			

DIMENSIONS

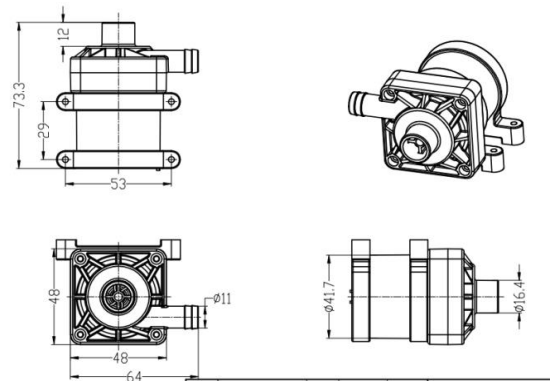


FLOW GRAPH

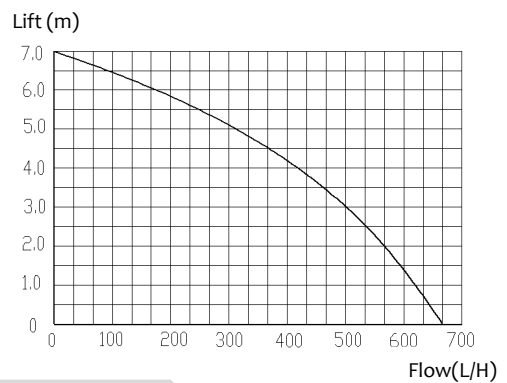

TECHNICAL DATA


Model No.	AWP3501			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)				
Current (mA)±15%			2180	1000
Power (W)±15%			26	24
Flow (L/min)			660	660
Lift (m)			7	7
Noise (dB)				
Use	Mobile shower machine			

DIMENSIONS

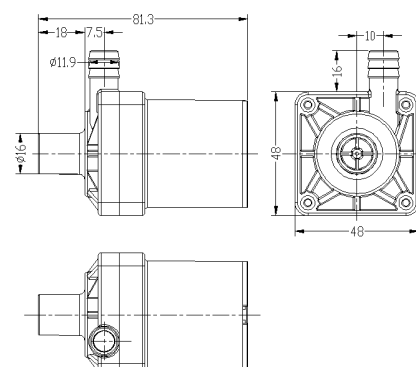




FLOW GRAPH

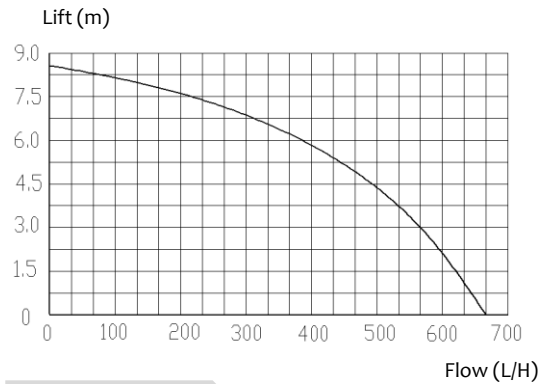


TECHNICAL DATA

Model No.	AWP3510			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)				
Current (mA)±15%			2180	1000
Power (W)±15%			26	24
Flow (L/min)			660	660
Lift (m)			8,5	8,5
Noise (dB)				
Use	Mobile shower machine, floor heating equipment			

DIMENSIONS

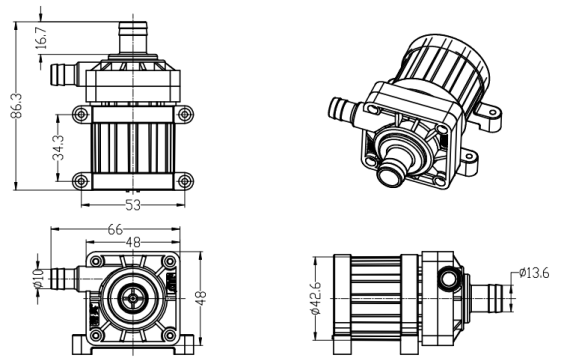


FLOW GRAPH

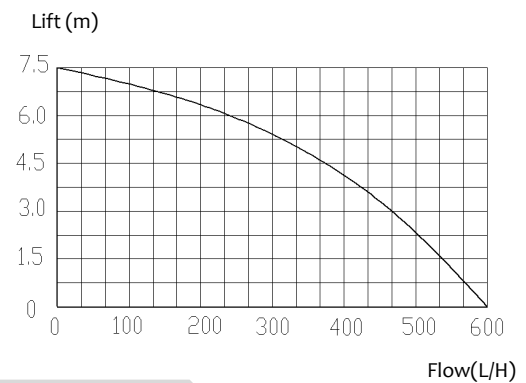

TECHNICAL DATA


Model No.	AWP3510			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	50/60	50/60		
Current (mA)±15%	520	260		
Power (W)±15%	26	26		
Flow (L/min)	600	600		
Lift (m)	7,5	7,5		
Noise (dB)				
Use	Mobile shower machine			

DIMENSIONS

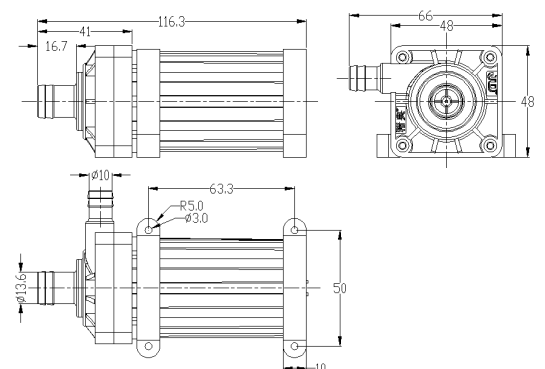




FLOW GRAPH

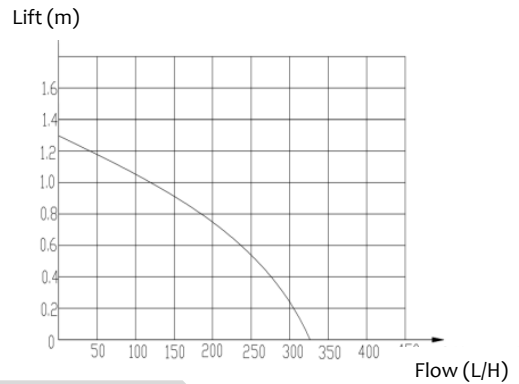


TECHNICAL DATA

Model No.	AWP3513			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)				
Current (mA)±15%			250	125
Power (W)±15%			3	3
Flow (L/min)			330	330
Lift (m)			1,3	1,3
Noise (dB)				
Use	Water heating blanket			

DIMENSIONS

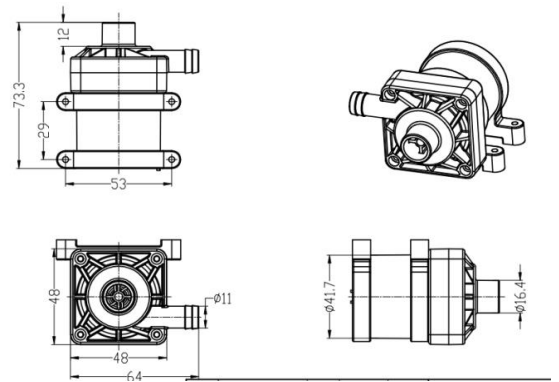


FLOW GRAPH

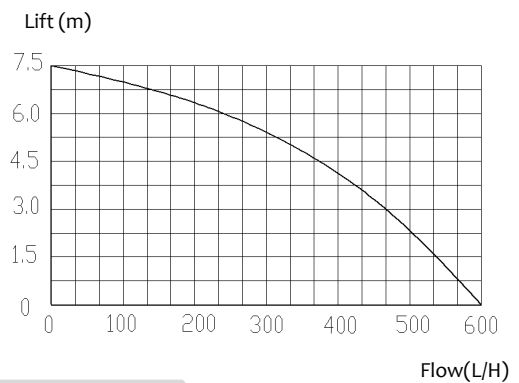

TECHNICAL DATA


Model No.	AWP3550			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)				
Current (mA)±15%			1900	950
Power (W)±15%			23	23
Flow (L/min)			600	600
Lift (m)			7,5	7,5
Noise (dB)				
Use	electric water heater			

DIMENSIONS

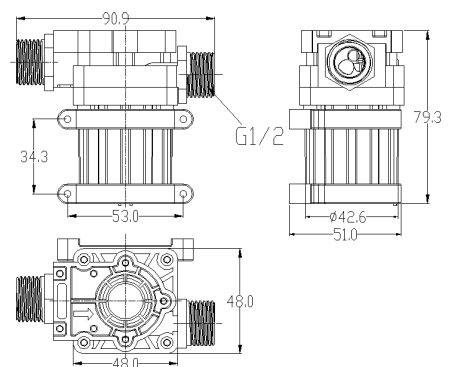




FLOW GRAPH

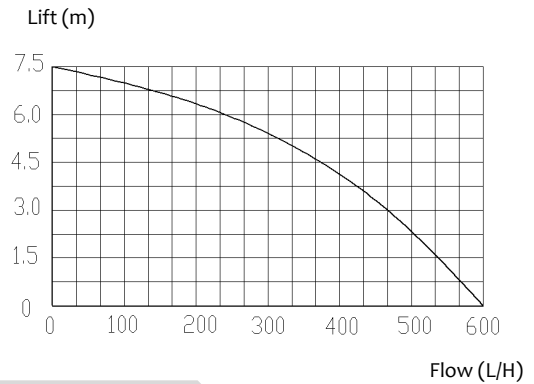


TECHNICAL DATA

Model No.	AWP3560			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)				
Current (mA)±15%			2100	1050
Power (W)±15%			25	25
Flow (L/min)			600	600
Lift (m)			7,5	7,5
Noise (dB)				
Use	electric water heater			

DIMENSIONS

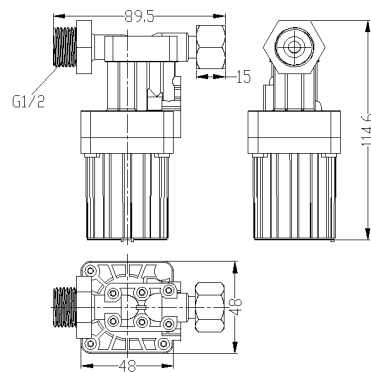


FLOW GRAPH

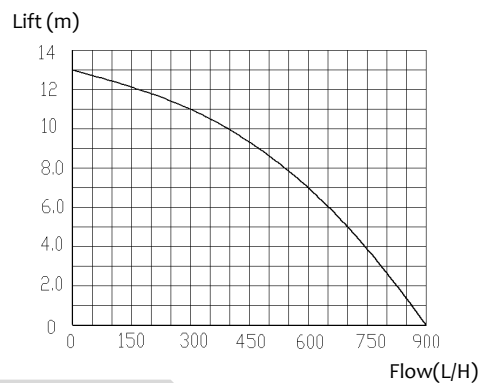

TECHNICAL DATA


Model No.	AWP3800			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)				
Current (mA)±15%			1980	890
Power (W)±15%			24	24
Flow (L/min)			900	900
Lift (m)			13	13
Noise (dB)				
Use	Mobile washing machine			

DIMENSIONS

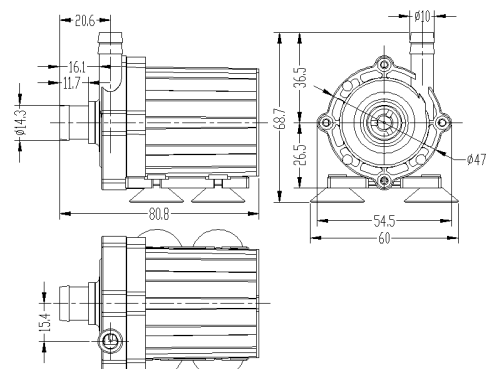




FLOW GRAPH

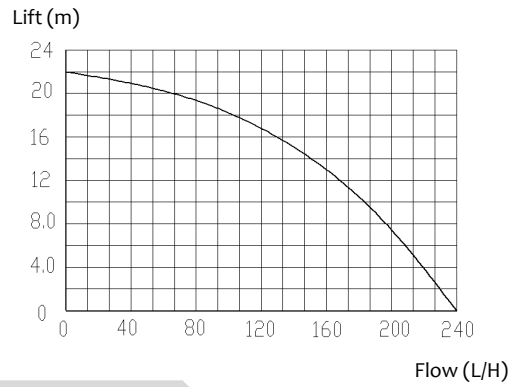


TECHNICAL DATA

Model No.	AWP3801			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)				
Current (mA)±15%			1980	890
Power (W)±15%			24	24
Flow (L/min)			240	240
Lift (m)			22	22
Noise (dB)				
Use	Smart toilet			

DIMENSIONS

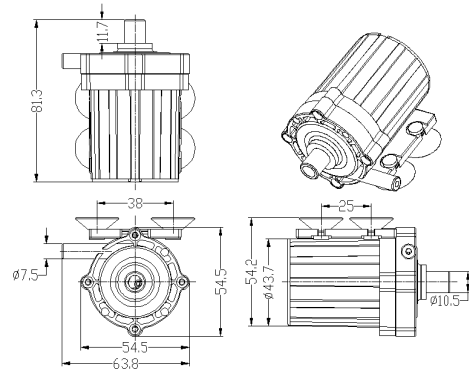


FLOW GRAPH

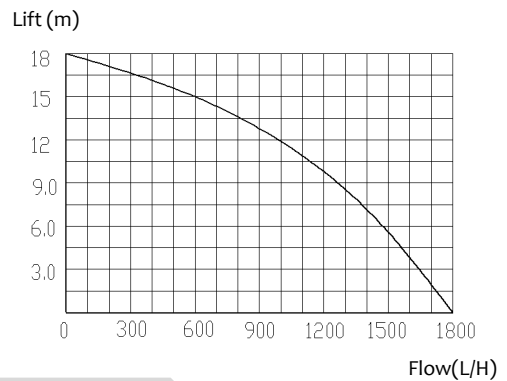

TECHNICAL DATA


Model No.	AWP5500			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)				
Current (mA)±15%			7600	4670
Power (W)±15%			91	112
Flow (L/min)			1450	1800
Lift (m)			17	18
Noise (dB)				
Use	Beauty equipment, dishwasher			

DIMENSIONS

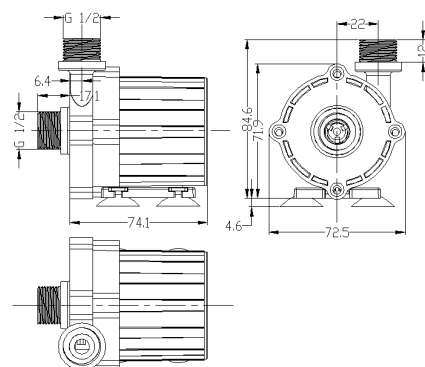




FLOW GRAPH

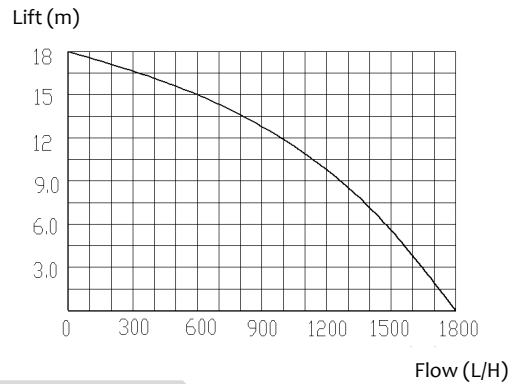


TECHNICAL DATA

Model No.	AWP5501			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)				
Current (mA)±15%			7600	4670
Power (W)±15%			91	112
Flow (L/min)			1450	1800
Lift (m)			17	18
Noise (dB)				
Use	Beauty equipment			

DIMENSIONS

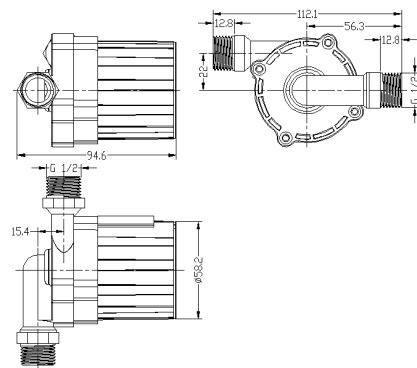


FLOW GRAPH

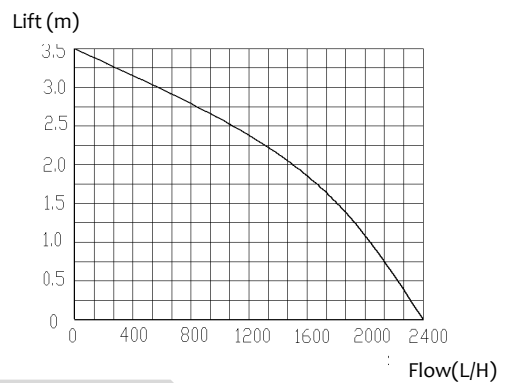

TECHNICAL DATA


Model No.	AWP5560			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)				
Current (mA)±15%			4600	2300
Power (W)±15%			55	55
Flow (L/min)			2400	2400
Lift (m)			3, 5	3, 5
Noise (dB)				
Use	dishwasher			

DIMENSIONS

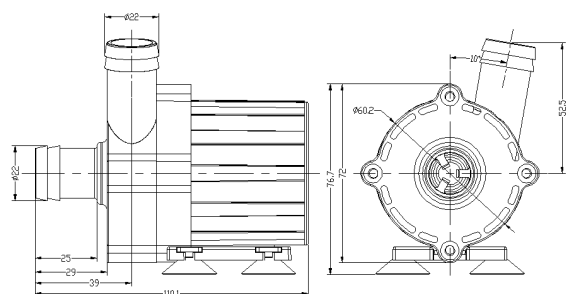




FLOW GRAPH

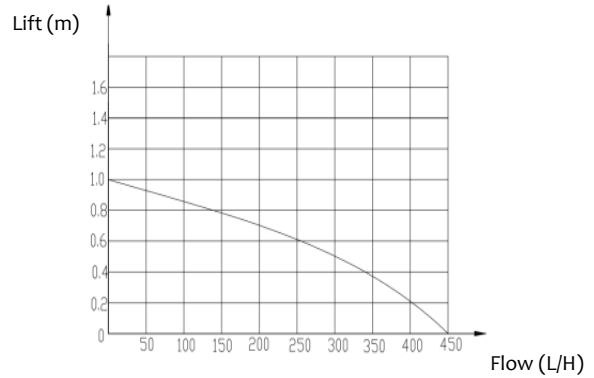


TECHNICAL DATA

Model No.	AWP5700			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)				
Current (mA)±15%		200	200	100
Power (W)±15%		2,4	2,4	2,4
Flow (L/min)		450	450	450
Lift (m)		1	1	1
Noise (dB)				
Use	Water heating blanket			

DIMENSIONS

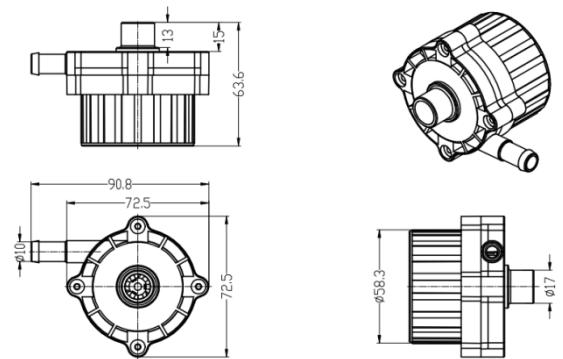


FLOW GRAPH

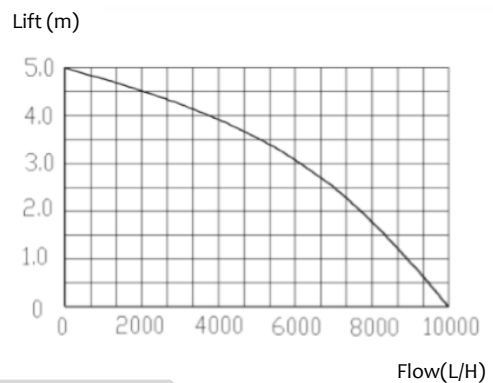

TECHNICAL DATA


Model No.	AWP7501			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)				
Current (mA)±15%				7200
Power (W)±15%				172
Flow (L/min)				10000
Lift (m)				5
Noise (dB)				
Use	Aquarium			

DIMENSIONS

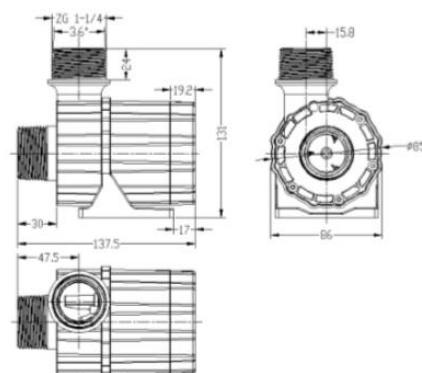




FLOW GRAPH

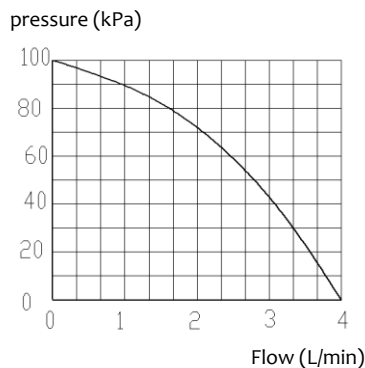


TECHNICAL DATA

Model No.	APM-D50			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)	60	50		
Current (mA)±15%	43	45	560	280
Power (W)±15%	5	5		
Flow (L/min)	4	4	4	4
pressure (kPa)	100	100	90	90
Noise (dB)	36	35	36	36
Use	Health care equipment			

DIMENSIONS

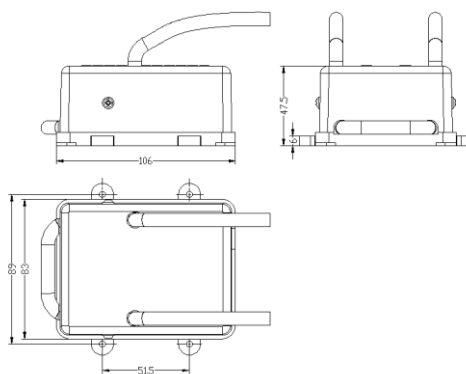


FLOW GRAPH

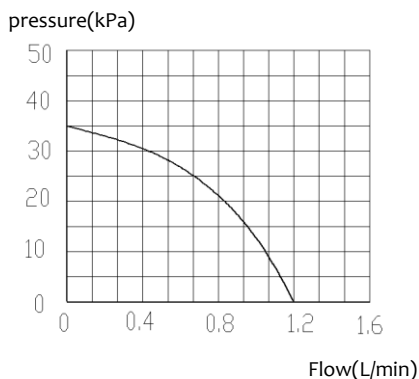

TECHNICAL DATA


Model No.	APM-D20			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)				
Current (mA)±15%			60	30
Power (W)±15%			0.7	0.7
Flow (L/min)			1.2	1.2
pressure (kPa)			35	35
Noise (dB)				
Use	artware			

DIMENSIONS

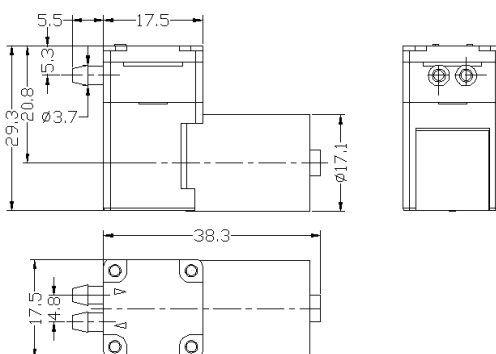




FLOW GRAPH

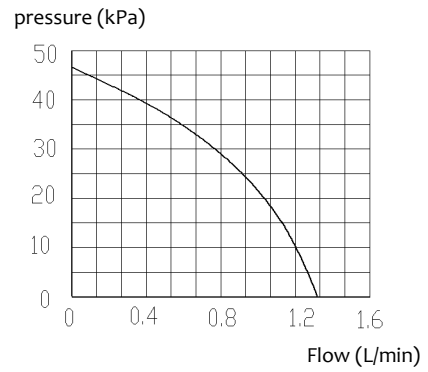


TECHNICAL DATA

Model No.	APM-D40			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)				
Current (mA)±15%			80	40
Power (W)±15%			0,9	0,9
Flow (L/min)			1,3	1,3
pressure (kPa)			46	46
Noise (dB)				
Use	Beer machine			

DIMENSIONS

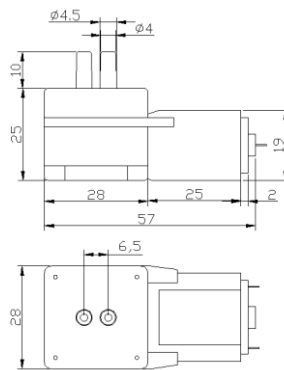


FLOW GRAPH

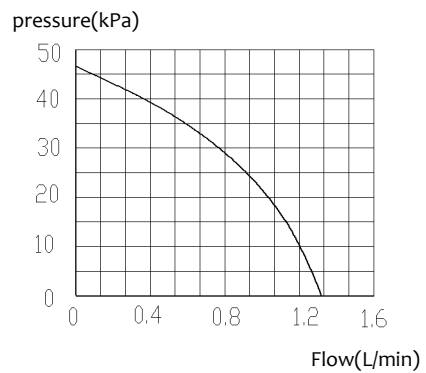

TECHNICAL DATA


Model No.	APM-D40			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)				
Current (mA)±15%			80	40
Power (W)±15%			0,9	0,9
Flow (L/min)			1,3	1,3
pressure (kPa)			46	46
Noise (dB)				
Use	artware			

DIMENSIONS

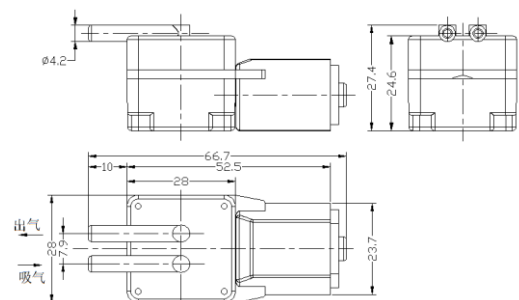




FLOW GRAPH

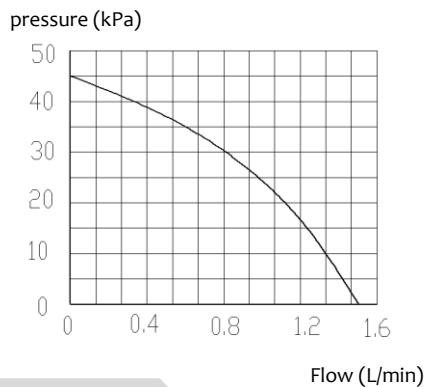


TECHNICAL DATA

Model No.	APM-D50			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)				
Current (mA)±15%			100	50
Power (W)±15%			1,2	1,2
Flow (L/min)			1,5	1,5
pressure (kPa)			45	45
Noise (dB)				
Use	artware			

DIMENSIONS

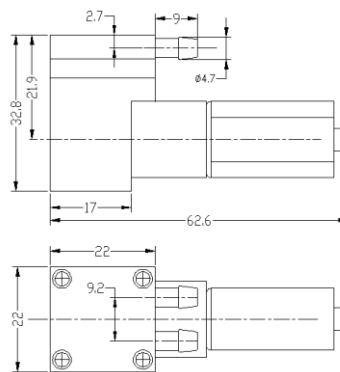


FLOW GRAPH

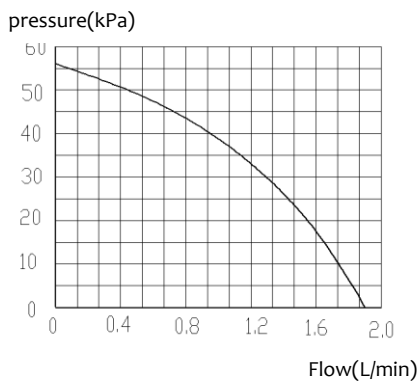

TECHNICAL DATA


Model No.	APM-D80			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)				
Current (mA)±15%			90	47
Power (W)±15%			1,1	1,1
Flow (L/min)			1,9	1,9
pressure (kPa)			56	56
Noise (dB)				
Use	Beer machine			

DIMENSIONS

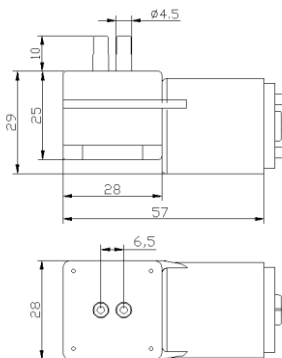




FLOW GRAPH

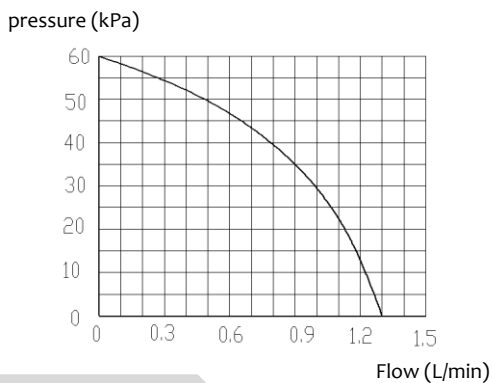


TECHNICAL DATA

Model No.	APM-D120			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)				
Current (mA)±15%			90	46
Power (W)±15%			1,1	1,1
Flow (L/min)			1,3	1,3
pressure (kPa)			60	60
Noise (dB)				
Use	artware			

DIMENSIONS

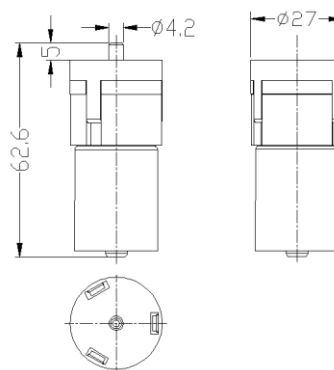


FLOW GRAPH

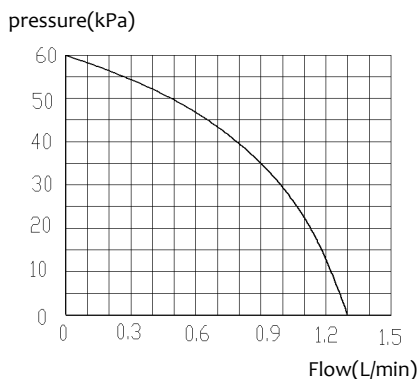

TECHNICAL DATA


Model No.	APM-D120WC			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)				
Current (mA)±15%			90	46
Power (W)±15%			1,1	1,1
Flow (L/min)			1,3	1,3
pressure (kPa)			60	60
Noise (dB)				
Use	To suck the pacifier			

DIMENSIONS

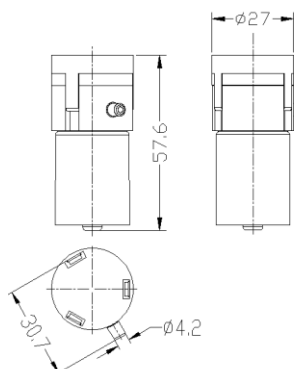




FLOW GRAPH

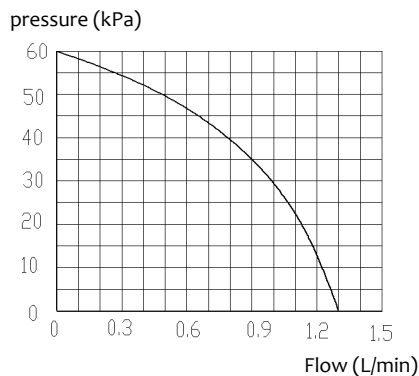


TECHNICAL DATA

Model No.	APM-D120C			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)				
Current (mA)±15%			90	46
Power (W)±15%			1,1	1,1
Flow (L/min)			1,3	1,3
pressure (kPa)			60	60
Noise (dB)				
Use	To suck the pacifier			

DIMENSIONS

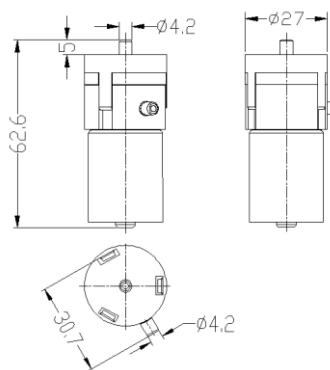


FLOW GRAPH

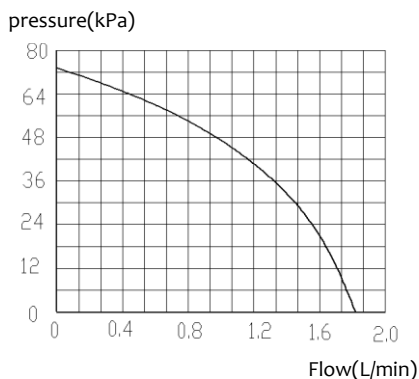

TECHNICAL DATA


Model No.	APM-D121			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)				
Current (mA)±15%			120	60
Power (W)±15%			1,4	1,4
Flow (L/min)			1,8	1,8
pressure (kPa)			70	70
Noise (dB)				
Use	artware			

DIMENSIONS

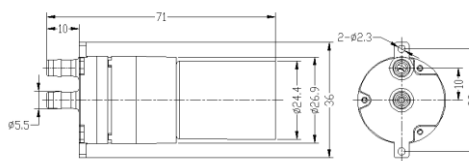




FLOW GRAPH

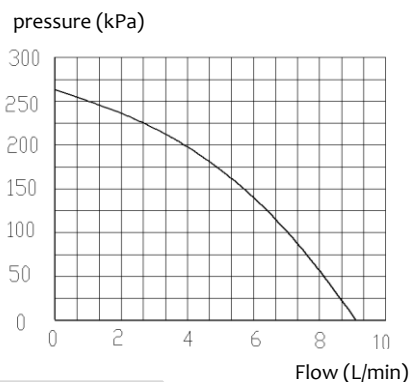


TECHNICAL DATA

Model No.	APM-D125			
Voltage (V) $\pm 10\%$	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)				
Current (mA) $\pm 15\%$			867	425
Power (W) $\pm 15\%$			9	9
Flow (L/min)			9	9
pressure (kPa)			260	260
Noise (dB)				
Use	Vacuum cooking machine			

DIMENSIONS

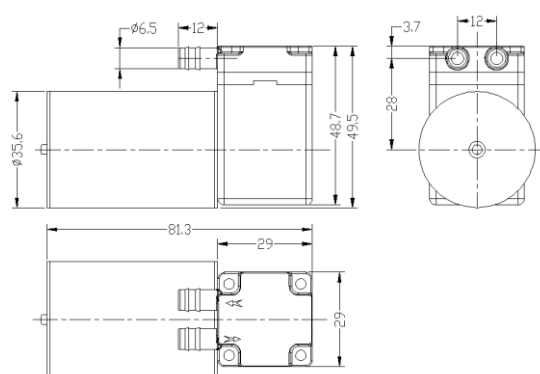


FLOW GRAPH

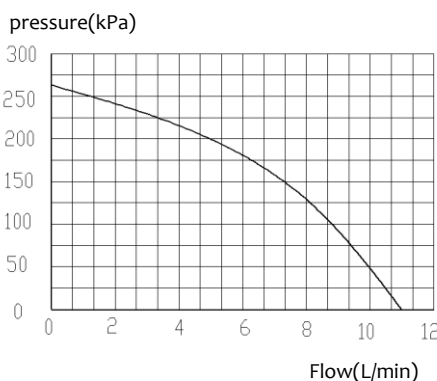

TECHNICAL DATA


Model No.	APM-D128			
Voltage (V) $\pm 10\%$	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)				
Current (mA) $\pm 15\%$			960	480
Power (W) $\pm 15\%$			11	11
Flow (L/min)			11	11
pressure (kPa)			280	280
Noise (dB)				
Use	Vacuum cooking machine			

DIMENSIONS

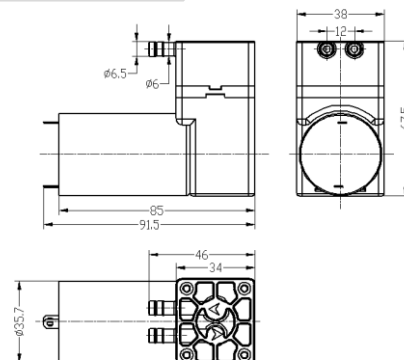




FLOW GRAPH

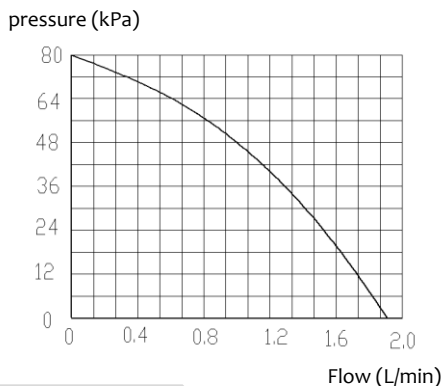


TECHNICAL DATA

Model No.	APM-D150S-385			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)				
Current (mA)±15%			140	70
Power (W)±15%				
Flow (L/min)			1,9	1,9
pressure (kPa)			80	80
Noise (dB)				
Use	Water dispenser			

DIMENSIONS

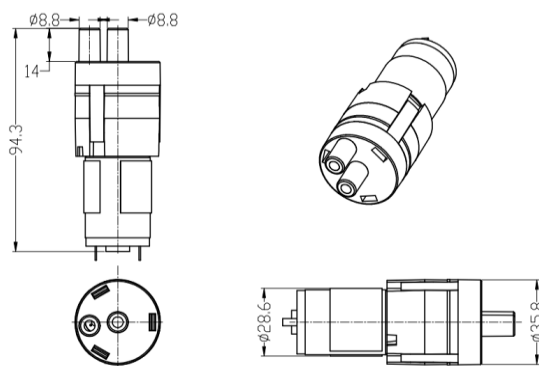


FLOW GRAPH

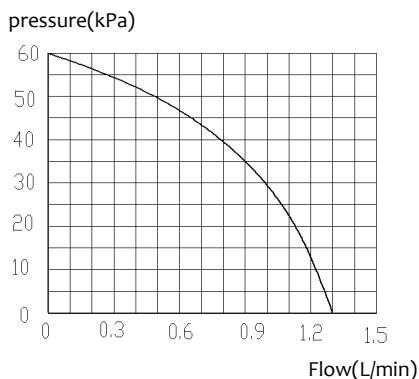

TECHNICAL DATA


Model No.	APM-D150S-280			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)				
Current (mA)±15%			90	46
Power (W)±15%			1,1	1,1
Flow (L/min)			1,3	1,3
pressure (kPa)			60	60
Noise (dB)				
Use	Water dispenser			

DIMENSIONS

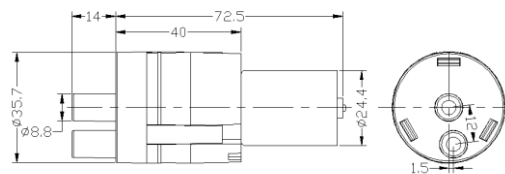




FLOW GRAPH

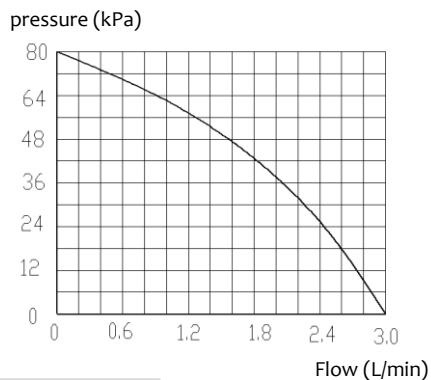


TECHNICAL DATA

Model No.	APM-D150-3530			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)				
Current (mA)±15%			420	210
Power (W)±15%				
Flow (L/min)			3	3
pressure (kPa)			80	80
Noise (dB)				
Use	Matching solenoid valve			

DIMENSIONS

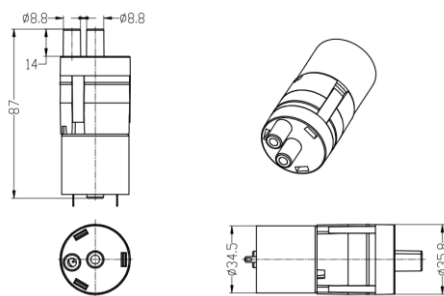


FLOW GRAPH

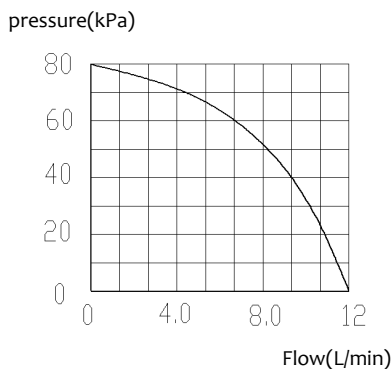


TECHNICAL DATA


Model No.	APM-D180			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)				
Current (mA)±15%			600	300
Power (W)±15%			7,2	7,2
Flow (L/min)			12	12
pressure (kPa)			80	80
Noise (dB)			40	40
Use	Massage chair			

DIMENSIONS

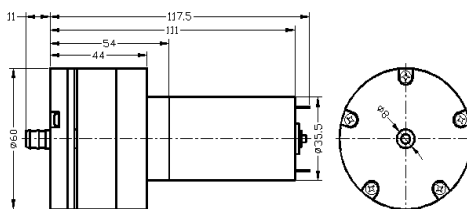

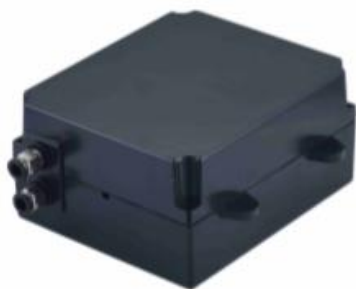



FLOW GRAPH

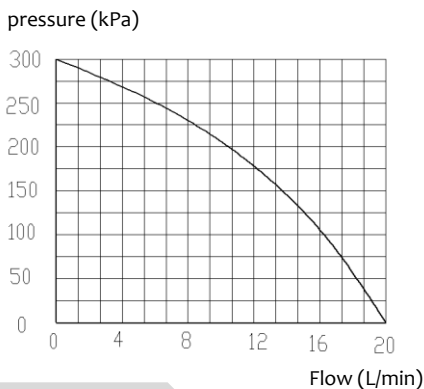


TECHNICAL DATA

Model No.	APM-D250			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)				
Current (mA)±15%			5000	2500
Power (W)±15%			60	60
Flow (L/min)			20	20
pressure (kPa)			300	300
Noise (dB)				
Use	oxygen machine			

DIMENSIONS

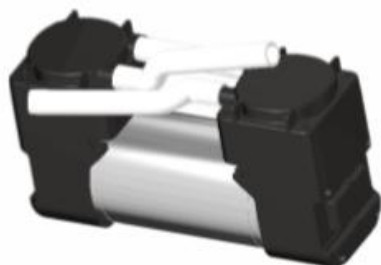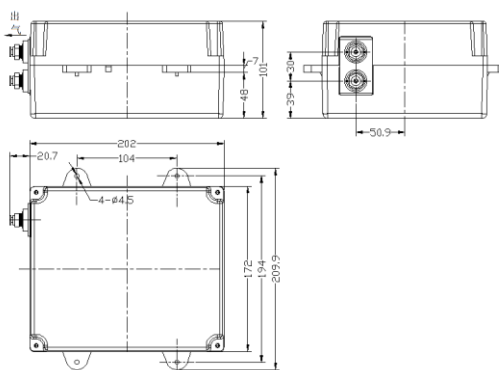

FLOW GRAPH

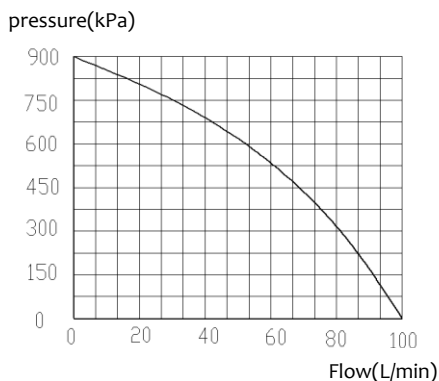

TECHNICAL DATA

Model No.	APM-D600			
Voltage (V)±10%	AC110V	AC220V	DC12V	DC24V
Frequency (Hz)				
Current (mA)±15%			28000	14000
Power (W)±15%			336	336
Flow (L/min)			100	100
pressure (kPa)			900	900
Noise (dB)				
Use	Auto Accessories			

DIMENSIONS

