



www.hi-hyperlite.com

Use hyperlite LED flood light,
enjoy brighter life now

If you need more information about our lights,
please email us or call us 24h




Email: info@hi-hyperlite.com
Toll-free number: +1(855) 688 7879

INSTALLATION INSTRUCTIONS

Knuckle Mount

Turn off power to electrical connections.
Wiring must be performed by a qualified electrician.
Make electrical connections according to the local and National Electrical Codes

1. Open junction box and run wiring into box.
2. Thread light body onto junction box using the 1/2-14 threads on knuckle
3. Connect wiring.
4. Adjust light head to desired angle and tighten Hexagon screw.

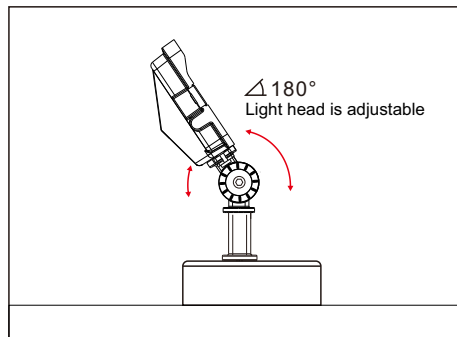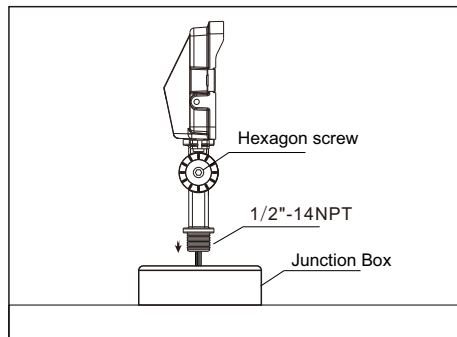

MORE PRODUCTS...

LED High Bay Light



Hero Black Series



Hero White Series



Tale Series



Will Series

LED Flood Light



Eyes Series



Guarder Series



Max Series

Area Light & Canopy Garage Light



Ares Series




Vega Series

LED Wall Pack Light



Moon Series



Wall E Series



Capsule Series

Temporary Work Light



Hive Series

LED Recessed Downlight



Halo Series



Dove Series



USER MANUAL
EYES series
LED FLOOD LIGHT



HYPERLITE

Web: www.hi-hyperlite.com
Email: sales@hi-hyperlite.com
Toll-free number: +1(855) 688 7879

FEATURES & SPECIFICATIONS

APPLICATION
The EYES series LED floodlight is designed to provide a cost-effective, energy-efficient solution for illuminating building facades, sign lighting, wall washing building exteriors, landscape lighting. EYES luminaires deliver a uniform, wide flood distribution.

Performance Data		CES-LS-VN -30W	CES-LS-VN -50W	CES-LS-VN -70W
General	Lumens	3300lm	5500lm	7700lm
	Efficacy	110 lm/w		
	CCT	5000K		
	CRI	>70		
	L70@25°C	>60,000 hours		
Physical	Beam Angle	120°		
	Mounting	1/2" Knuckle, Trunnion		
Electrical	Color	Bronze		
	Input Voltage	120Vac		
	Power factor	>0.9		
Qualification	Operating temperature	-86°F to 122°F		
	Listings	cUL		
	IP Rating	IP 65. Suitable for wet locations		
Warranty		24 months		

CERTIFICATE OF COMPLIANCEUL CERTIFICATION

Certificate Number: E483348
Report Reference: E483348
Issue Date: 2017-DECEMBER-26




Additional Information:
See the UL Online Certifications Directory at www.ul.com/database for additional information

- ▲ Only those products bearing the UL Certification Mark should be considered as being covered by UL's Certification and Follow-Up Service.
- ▲ Look for the UL Certification Mark on the product


DIMENSIONS

- With 1/2" Knuckle Mount

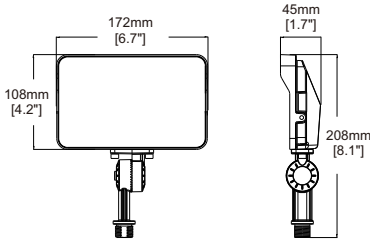


30W

N.W:1.1 ± 0.1 lb

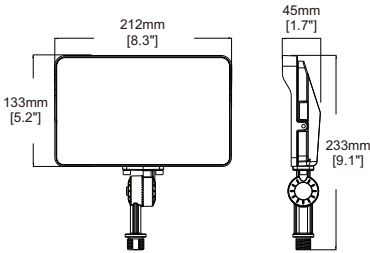

50W


N.W:1.6 ± 0.1 lb

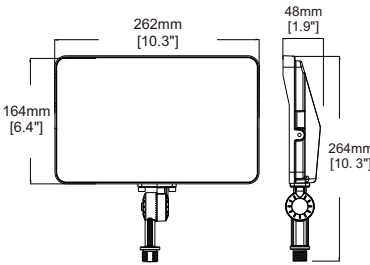

70W


N.W:2.6 ± 0.1 lb

- With Trunnion Mount




30W

N.W:1.1 ± 0.1 lb



50W

N.W:1.6 ± 0.1 lb



70W

N.W:2.6 ± 0.1 lb

INSTALLATION INSTRUCTIONS

READ THOROUGHLY BEFORE INSTALATION

⚠ WARNING! FIXTURES MUST BE GROUNDED and installed in accordance with the National Electrical Code and all local codes. Failure to do so may increase the **RISK OF PERSONAL INJURY, PROPERTY DAMAGE, FIRE AND DEATH.**

⚠ WARNING! Dangerous voltage exist within the unit and all precautions usually observed in handling high voltage equipment should be observed when replacing light engine or otherwise servicing luminaires. Disregarding this warning could result in electrical shock and possible injury to the individual installing or servicing this equipment. Installation, service and maintenance of luminaires should be done by a **qualified licensed electrician.**

⚠ CAUTION! To reduce the risk of death, personal injury or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards please read all warnings and instructions included with and on the fixture box and all fixture labels.

NOTE!

- This equipment is only for professional installation. Non-professional personnel shall not remove or install the equipment.
- To avoid damage,falling,electric shock or fire, please do not modify the lamp or replace accessories without confirming with the supplier.
- Maintenance/installation and replacement the lamps , please confirm to cut off the power supply, and the lamps have set up a cooling. Please make sure the lamps properly installed before processing power.
- Ensure the accurate and reliable connection.
- Ensure that the product around the vent, the lamp cannot violate any fire prevention regulations when using.


Carefully read these instructions before installing product and keep it for future reference. If you do not understand these instructions, before starting any work, contact sales@hi-hyperlite.com or (855) 688-7879.

INSTALLATION INSTRUCTIONS

Trunnion Mount

Turn off power to electrical connections.
Wiring must be performed by a qualified electrician.
Make electrical connections according to the local and National Electrical Codes

1. Loosen light head adjustment screws with hex key.
2. Securely attach light to wall and connect wiring.
3. Rotate light head to desired angle and tighten adjustment screws.

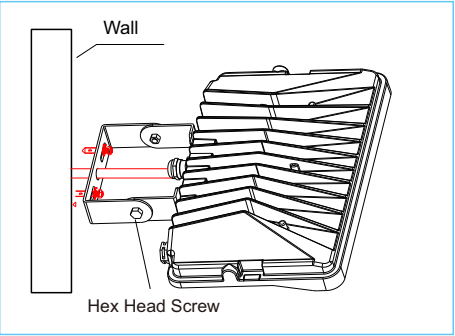

⚠ LIGHT MUST BE GROUNDED

