

SMART WAKE UP LIGHT

WiFi Version




User Manual

Thank you for choosing our product.  
Please read this manual carefully before using it.

1

OVERVIEW

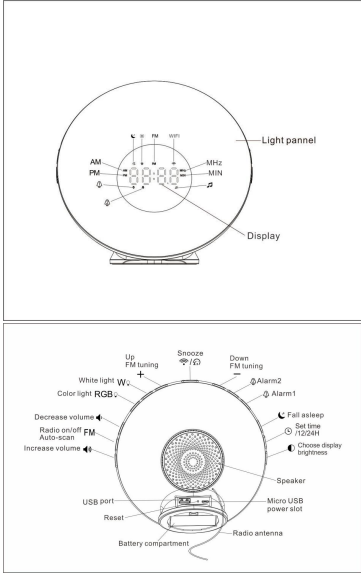

2

CAUTION

- Please keep this manual for future reference.
- This product is for indoor use only.
- Do not press two or more buttons at the same time.
- Do not use this product near water or in a damp place.
- Unplug the device during a light storm or when unused for a long period of time to prevent damage to the product.
- Do not attempt to disassemble the device.
- Make sure you are using the correct power supply: plug the device into the outlet with the appropriate power supply as described in the manual.
- Do not drip or splash water on the device.
- Do not place the liquid container on top of the device.

UNPACKING YOUR PACKAGE

When unpacking, ensure the following elements are included:

- 1 x Wake Up Light
- 1 x USB cable
- 1 x Power Adapter
- 1 x User Manual

SPECIFICATION

3

- AC/DC Adaptor Input: 100-240V ~ 50/60Hz 0.5A
- Output: 5V --- 2A
- Output for phone charging: 5V --- 1A
- Power Consumption: 10W
- FM Frequency band: 87.5 - 108MHz

SET UP

1. Connect the USB cable to the power adapter and the Wake Up Light.
2. Plug the power adapter to the power socket.
3. Insert 3xAAA batteries to the battery compartment to be used as a back-up power source to record your setting and time. (batteries are not included in the package)

**Note:** The Wake Up Light can not be operated when no connection with DC 5V---2A power

BUTTON CONTROL

1. CLOCK

Once the Smart Wake Up Light is connected to power, the hour flashes.

Purpose	Action / Findings
Set time	Use  or  to set time and press  to confirm and continue ; display , use  or  select network

4

	timing or not and press  to confirm.
Resume the time setting	Press and hold  until the hour flashes and repeat setting as above.
Switch 12/24H	Press .
Set display brightness	Press  to set display brightness: low, high or off. Default is high. Press and hold , brightness mode change ( on for auto sensing mode, off for manual adjustment mode)

2. ALARM

Allow user to program 2 alarms based on individual needs. For example, set Alarm 1 for working days and Alarm 2 for weekend. The setting of the 2 alarms is same.

Purpose	Action / Findings
Activate or deactivate alarm	Press /. When the alarm is activated, the alarm icon  /  will illuminate on the display and the alarm time will be shown shortly.
Set alarm time	Press and hold / until the hour indication flashes. Use  or  to set alarm time. Press / to confirm and the mode indication flashes.

5

Set alarm mode	Use  or  to select mode (F1 to F3 for selection, F1=Light + Sound; F2 Light; F3=Sound). Press / to confirm and the sound indication flashes.
Set alarm sound	Use  or  to select sound (S-1 to S-8, xx MHZ for selection). Press / to confirm and the volume indication flashes.
Set alarm sound volume	Use  or  to select volume (V01 to V15 for selection, default is V10). Press / to confirm and the light brightness indication flashes.
Set wake-up light brightness	Use  or  to select light brightness (L1 to L30 for selection, default is L10). Press / to confirm and the duration time indication flashes.
wake-up light duration time	30 MIN
Sunrise simulation	The wake-up light can simulate sunrise to gradually increase the brightness 30min before the alarm time and reaches the set brightness at alarm time.
Snooze	When the alarm goes off, press  to snooze. After 5 minutes, the alarm sound will ring and/or light will automatically come on.

6

Stop alarm	1. When the alarm goes off, press any button except  to stop the alarm. 2. When the alarm goes off, the alarm will stop automatically in 5 minutes. 3. During the wake-up light is increasing brightness, press and hold  to turn off the light. The alarm sound will still play at alarm time when your alarm mode include sound. <b>Note:</b> The above operations don't deactivate the alarm, the alarm will normally work in the next day.
------------	---

3.FALL ASLEEP

Purpose	Action / Findings
Start	Press  to start fall asleep setting. The fall asleep icon  will illuminate on the display and the mode indication flashes.
Set fall asleep mode	Use  or  to select mode (F1 to F3 for selection, F1=Light + Sound; F2=Light; F3=Sound). Press  to confirm and the sound indication flashes.
Set fall asleep sound	Use  or  to select sound (S-1 to S-8, xx MHZ for selection). Press  to confirm and the volume indication flashes

7

Set fall asleep sound volume	Use  or  to select volume (V01 to V15 for selection, default is V10). Press  to confirm and the brightness indication flashes.
Set fall asleep light brightness	Use  or  to select brightness (L1 to L30 for selection, default is L10). Press  to confirm and the duration time indication flashes.
Set fall asleep duration time	Use  or  to select duration time (15/30/ 60 MIN for selection, default is 15 MIN). Press  to confirm setting and activate the fall asleep.
Sunset simulation	Sunset simulation for peaceful bedtime: When the fall asleep is activated, the light will dim until it goes off and the sound will gradually decrease until there is no sound.
Stop/deactivate fall asleep	Press and hold  to stop/deactivate fall asleep.
During fall asleep is working	4. Press  or  to adjust the brightness. Light dimming will start from the selected brightness level. 5. Press  or  to adjust the volume. Sound decreasing will start from the selected sound level. 6. Press  or  to adjust the radio channel when radio is selected as the fall asleep sound. The selected

8

	radio channel will be played and decrease sound gradually until there is no sound.
--	--

4. BEDSIDE LIGHT

Purpose	Action / Findings
White light	1. Press  to turn on/off white light. 2. Press  or  to adjust the brightness (L1 to L30 levels, default is L10).
Color Light	1. Press  to turn on/off color light, when turn on, it will be auto color-change mode. 2. Press  or  to adjust the light color (6 colors for selection). Green-Red-Blue-Purple-Orange-Aqua. 3. Press and hold  or  to adjust the color light brightness (L1 to L30 levels, default is L30).

5.RADIO

To get a good radio signal, fully unwind antenna and move it around until you get good reception.

Purpose	Action / Findings
Turn on/off	Press . The radio icon  will illuminate on the display when radio is turned on.

9

Auto scan	Press and hold <b>FM</b> until frequency flashes to start searching for active channels. Once the channels are located, they will be saved as P01,P02, up to P40.
FM tuning	1. Press <b>-</b> or <b>+</b> to adjust the frequency(0.1MHZ). 2. Press and hold <b>-</b> or <b>+</b> to adjust channels.
FM volume	Press <b>🔊</b> or <b>🔇</b> to adjust the volume.



6.USB port output 5V—1.0A for charging mobile phone

PLUSMINUS APP CONTROL

**1.Download the App**  
Please download “PlusMinus” from App Store, Google Play or our website (www.plusmunis.ai/app). You can also scan the QR below to download the App.



**2. Add the device**  
Once your alarm clock is connected with the power, press and hold button **🔌** for 5 seconds until the icon **📶** on the device rapidly blinking. This is in pairing mode.  
Choose “Add Device” in the center of the page and choose the type “TableLamp”  
Make sure you connect the 2.4 Ghz WiFi and continue connection.  
NOTE: if the icon **📶** on the device is NOT rapidly blinking, please press and hold the button **🔌** until it is rapidly blinking.



**3.App operation**  
After the device is connected successfully, all functions can be controlled and set through the App.

VOICE CONTROL: AMAZON ALEXA

1. Add device in the “PlusMinus” App and keep it online;
2. Login your Amazon account in “Amazon Alexa” App;
3. Open the PlusMinus App and then click the “Smart Integrations” button on the right upper corner. Afterward, choose link to “Amazon Alexa”;
4. Click “Sign in with Amazon” and then follow the instruction to link the skill.

5. Then you can control the device through Amazon Alexa.

Description	Functions	Voice Commands
Light mode	Turn on the light	Alexa, turn on Wake-up Light
	Turn off the light	Alexa, turn off Wake-up Light
	Green light	Alexa, set Wake-up Light to green
	Red light	Alexa, set Wake-up Light to red
	Blue light	Alexa, set Wake-up Light to blue
	Pink light	Alexa, set Wake-up Light to pink
	Orange light	Alexa, set Wake-up Light to orange
	Light blue light	Alexa, set Wake-up Light to light blue
Light brightness	Color changing automatically	Alexa, set Wake-up Light to auto color
	Adjust the light brightness	Alexa, set Wake-up Light's brightness to 1-100 percent
Display brightness	Turn off the screen display	Alexa, turn off Wake-up Light's screen mode
	Lower the screen display's brightness	Alexa, set Wake-up Light's screen mode to low
	higher the screen	Alexa, set Wake-up Light's screen

	display's brightness	mode to high
--	----------------------	--------------

VOICE CONTROL: Google Assistant

1. Log in your Google account in Google Home;
2. Open PlusMinus App and click the "Smart Integrations" button on the right upper corner and link to "Google Assistant";
3. Click "Link with Google Assistant" and it will take you to an authorization page. Click "Agree and link";
4. Now you can control the device through Google Home.

Description	Functions	Voice Commands
Light mode	Turn on the light	Ok, Google, turn on Wake-up Light
	Turn off the light	Ok, Google, turn off Wake-up Light
	Green light	Ok, Google, set Wake-up Light to green
	Red light	Ok, Google, set Wake-up Light to red
	Blue light	Ok, Google, set Wake-up Light to blue
	Pink light	Ok, Google, set Wake-up Light to

		pink
	Orange light	Ok, Google, set Wake-up Light to orange
	Color changing automatically	Ok, Google, set Wake-up Light to auto color
	Adjust the light brightness	Ok, Google, set Wake-up Light's brightness to 1-100 percent

**Warranty**  
Products are with our worry-free 12-month warranty.  
Website: [www.lumiman.com](http://www.lumiman.com)  
Tech Support Email: [support@lumiman.com](mailto:support@lumiman.com)