

OUTLAND MODELS

Assembly instructions for:

Medium Open Shed for Cargo / Equipment HO OO Scale Outland Models Train Railroad

9 pieces




****THIS MODEL REQUIRES GLUE** Please note the use of plastic model cement will yield the best results. Super glue will discolor the plastic and thin cement will not provide a strong enough bond.**

- 1. Using extreme care and caution start by trimming any of the fine excess plastic with a hobby knife or utility knife.**




- 2. Now begin assembly by inserting the slots of the three vertical braces into the slots of the first horizontal brace.**

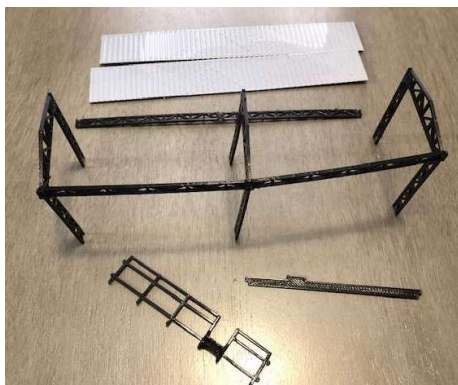


OUTLAND MODELS

3. Repeat for the opposite side, again inserting the three vertical braces into the slots for the second horizontal brace.

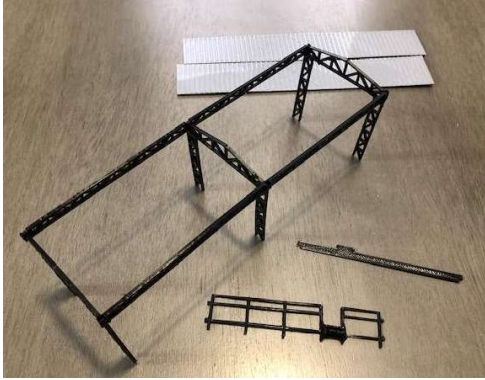

4. Now insert the gate in between one of the outer and one of the middle supports.

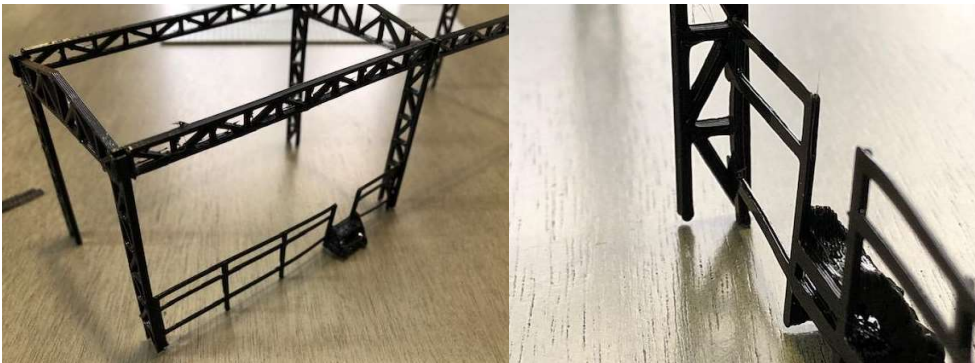


5. If desired, next insert the support bar behind the gate.



OUTLAND MODELS

- 6. You may find it helpful to temporarily tape the roof panels together while you apply the glue to aid in keeping everything lined up. Furthermore it is beneficial to use a small amount of weight such as a weighted tape dispenser to hold the roof panels to the framework while waiting for the glue to dry.**

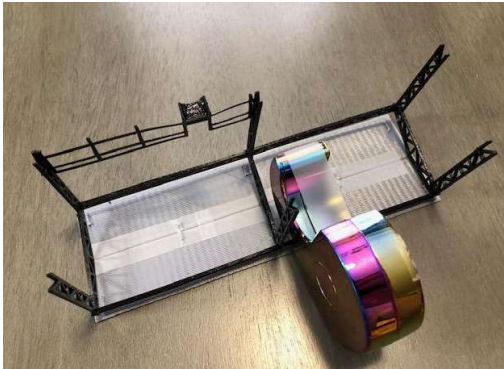

- 7. With the framework of your model upside down, sitting on the roof begin to apply plastic model cement one side at a time all along the roof line where it meets the framework. Once the first side dries, repeat for the opposite side.**
- 8. Congratulations, your new model is complete! Please remember to check out all of our latest products on our website outlandmodels.com**

We sincerely thank you for your business and we hope this model is a great addition to your collection. As always we hope to assist you in the future with any other model needs you may have.