


## CONTENTS

Product introduction Pag	je 1
Disclaimers Pag	je 1
GVM-150D Product parameter Pag	je 2
GVM-150S Product parameter Pag	je 3
Product structure icon Pag	je 4
Installation method Page	5~8
Description of product control keys Pag	je 9
Description of remote control Page	e 10
Function introduction and instruction for use Page 11	~12
Simple faults and troubleshooting Page	e 13
Precautions Page	e 14
Use and preservation Page	e 14
Packing list Page	÷15

GVM-150D / GVM-150 C O REAT VIDEO MAKER	s TS
Product introduction	Page 1
Disclaimers	Page 1
GVM-150D Product parameter	Page 2
GVM-150S Product parameter	Page 3
Product structure icon	Page 4
Installation method	Page 5~8
Description of product control keys	Page 9
Description of remote control	Page 10
Function introduction and instruction for use	Page 11~12
Simple faults and troubleshooting	Page 13
Precautions	Page 14
Use and preservation	Page 14
Packing list	Page 15
GVM Official website Faceboo	
Web:www.gvmled.com	




Name	Quantity	Note
Main Machine	1	
Power Cord	1	
Lamp Shade	1	
Carrying Case	1	
User Manual	1	
The remote control	1	
	15	5
	8	



## **C O N T E N T S**

Product introduction	Page 1
Disclaimers	Page 1
GVM-150D Product parameter	Page 2
GVM-150S Product parameter	Page 3
Product structure icon	Page 4
Installation method	Page 5~8
Description of product control keys	Page 9
Description of remote control	Page 10
Function introduction and instruction for use	Page 11~12
Simple faults and troubleshooting	Page 13
Precautions	Page 14
Use and preservation	Page 14
Packing list	Page 15

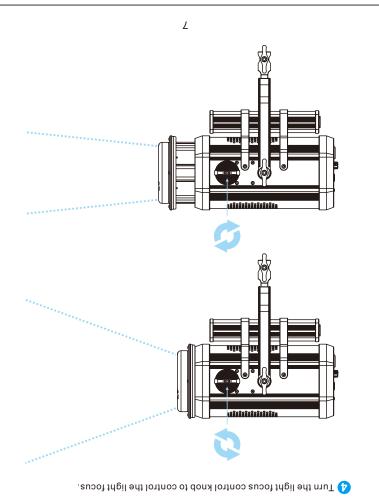

of the product are:  $\oplus$  It has the character of stepless adjusting and it possesses 1 COB lamp We firmly believe that the correct use of this product will definitely help your shooting work. Before using the product, we strongly recommend that you carefully read the following user guide.

## DISCLAIMERS

product and other things around. carefully, understand and acknowledge all the terms and contents of this statement, and promise to take full responsibility for the use of this product and possible

consequences.

### **PRODUCT INTRODUCTIO**

Welcome to "GVM-150D / GVM-150S". This product is specially designed for senior photography enthusiasts. The product is suitable for live / outdoor / studio photography, and also for youtube video shooting. The main features

bead, which contribute to the recovering and enriching of object colors; it provides you with natural and vivid shooting effect. O The product has DMX interface, it can be controlled by DMX console. 3 The product has LCD display and stable system, supports 360 rotation, and can effectively control light. Equipped with a standard cover, it can avoid extra light, make the light more concentrated, and customize the control of supplementary light, so that you can easily shoot the desired results at will.

1

1. Before using this product, please read the instructions carefully and make sure use the product correctly. If you don't obey the instructions and warnings, you maybe cause harm to yourself and the people around, or even damage the 2. Once you use this product, you are deemed to have read the disclaimer and warning

 Product model : GVM-150D Brand : GVM Product Name : Photography lights Product Type : Photography Fill Light Features / Features : Joint control, high display, stepless light control, Console interface Lamp beads quantity : COB\*1 ♦ Color rendering index : ≥97 Color temperature : 5600K

Brightness: Bare light : 40000lux/0.5m, 14000lux/1m Plus standard cover : 65000lux/0.5m, 20000lux/1m Light adjustment method : stepless adjustment

- Product Weight : 4.15KG Power : 150W
- Product Size(mm) : 228\*320\*315 Cooling : Heat sink radiating

Product material : Aluminum alloy Voltage : AC:110-240V

Power supply mode : AC input Power supply : 32V/6A(Fixed on the lamp body) Commodity origin : China. Huizhou


2

# PRODUCT PARAMETE


Product model : GVM-150S Brand : GVM Product Name : Photography lights Product Type : Photography Fill Light


- Features / Features : Joint control, high display, stepless light control, Console interface Lamp beads quantity : COB\*1
- ♦ Color rendering index : ≥97 Color temperature : 3200K~5600K
- Brightness: Bare light : 38000lux/0.5m, 13000lux/1m Plus standard cover : 62000lux/0.5m, 19000lux/1m
- Light adjustment method : stepless adjustment Product Weight : 4.15KG
- Power : 150W
- Product Size(mm): 228\*320\*315 Cooling : Heat sink radiating
- Product material : Aluminum alloy Voltage : AC:110-240V
- Power supply mode : AC input
- Power supply : 32V/6A(Fixed on the lamp body) Commodity origin : China. Huizhou


3

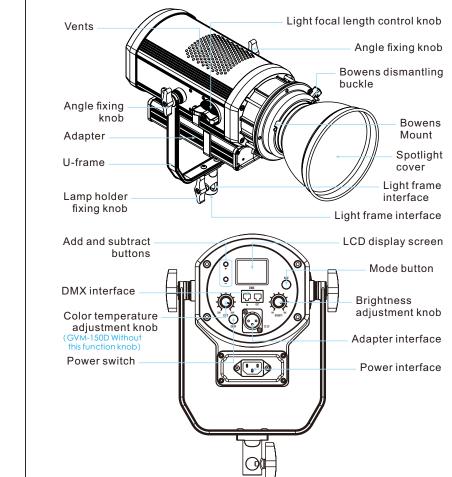

# INSTALLATION

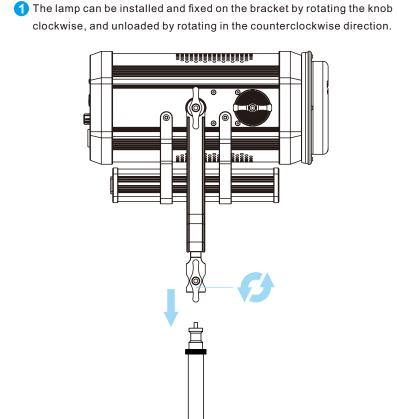

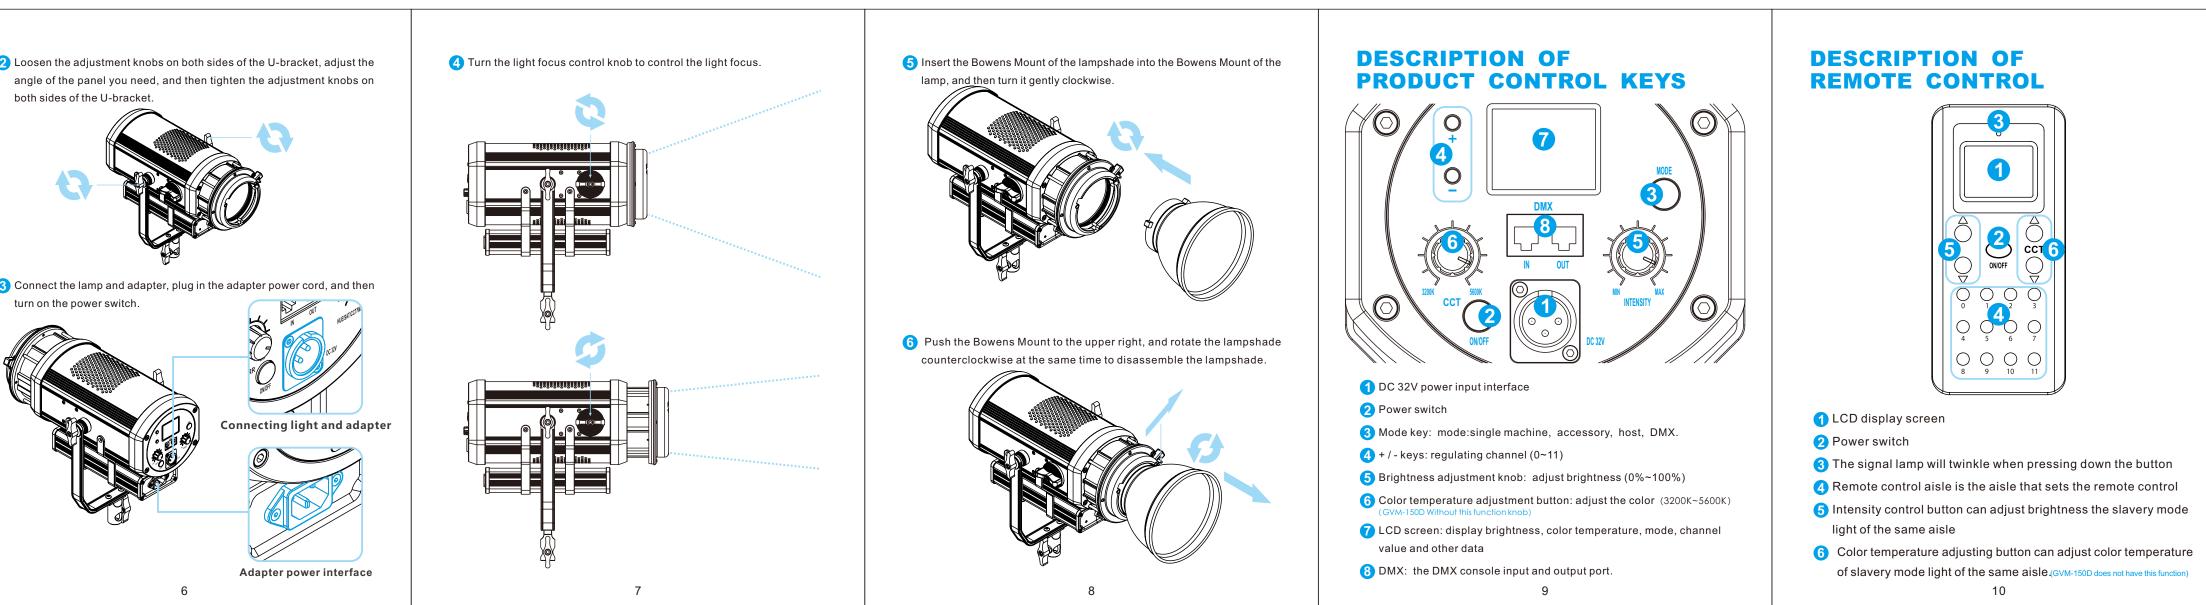

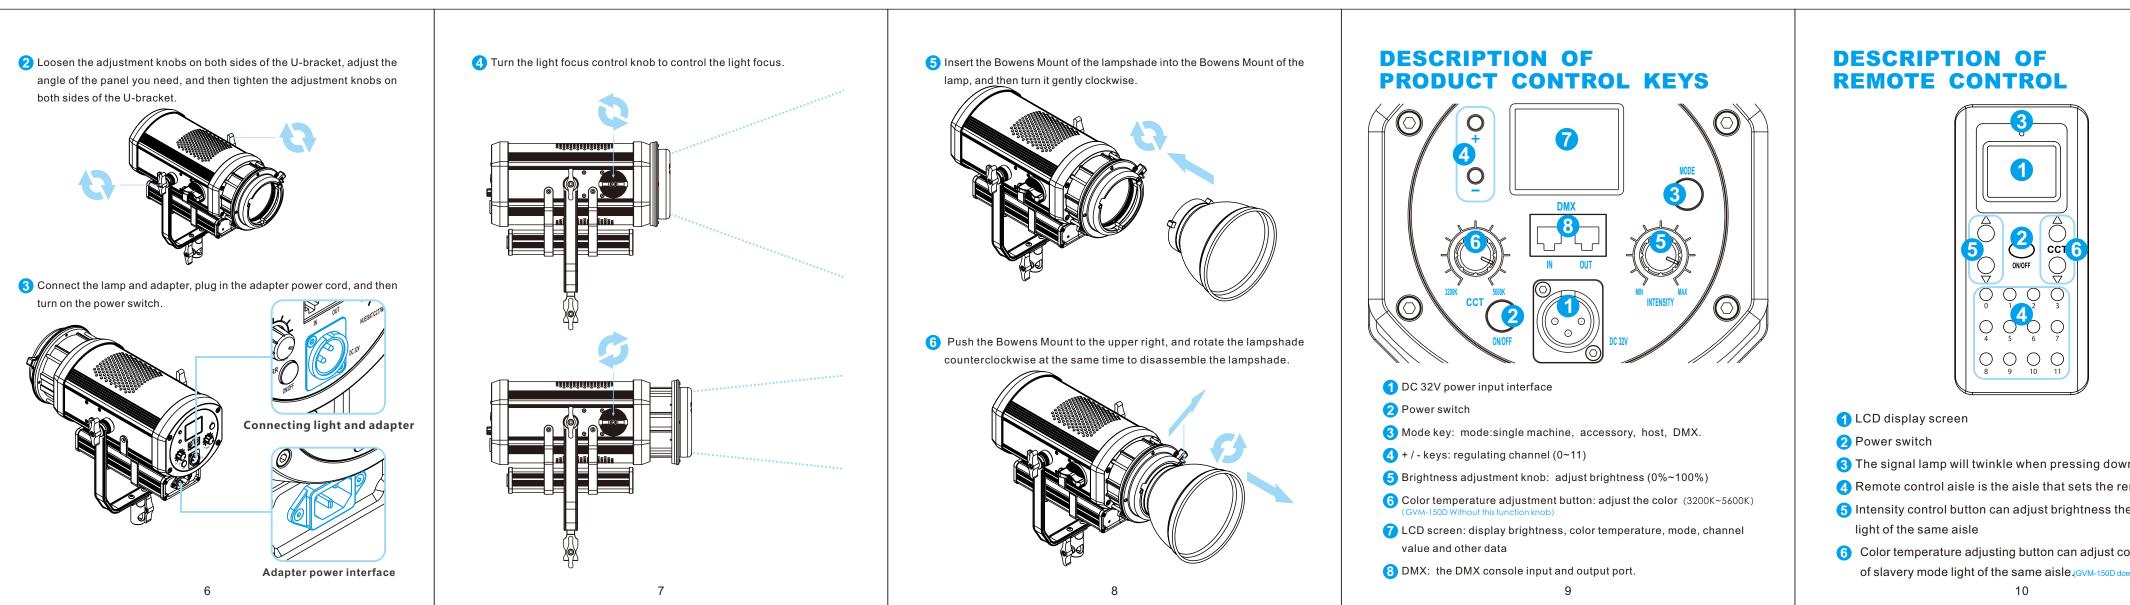


## **PRODUCT INTRODUCTION**

Welcome to "GVM-150D / GVM-150S". This product is specially designed for senior photography enthusiasts. The product is suitable for live / outdoor / studio photography, and also for youtube video shooting. The main features of the product are:

- It has the character of stepless adjusting and it possesses 1 COB lamp bead, which contribute to the recovering and enriching of object colors; it provides you with natural and vivid shooting effect. ② The product has DMX interface, it can be controlled by DMX console.
- 3 The product has LCD display and stable system, supports 360 rotation, and can effectively control light. Equipped with a standard cover, it can avoid extra light, make the light more concentrated, and customize the control of supplementary light, so that you can easily shoot the desired results at will.
- We firmly believe that the correct use of this product will definitely help your shooting work. Before using the product, we strongly recommend that you carefully read the following user guide.

#### DISCLAIMERS

- 1. Before using this product, please read the instructions carefully and make sure use the product correctly. If you don't obey the instructions and warnings, you maybe cause harm to yourself and the people around, or even damage the product and other things around.
- Once you use this product, you are deemed to have read the discl carefully, understand and acknowledge all the terms and contents of this statement, and promise to take full responsibility for the use of this product and possible consequences. 1

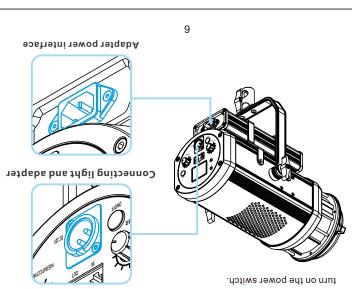



📀 Loosen the adjustment knobs on both sides of the U-bracket, adjust the

SIMPLE	FAULTS
	OUBLESHOOTING
	OUDELSHOUTING

Phenomenon	Check the product	Troubleshooting
The switch indicator does not light up	Check the matching power adapter indicator light up or not.	Make sure the adapt is well contacted wi the power plug
The knob of lightness and color temperature are out of control	Check if the mode were set as slave mode, lightness and color temperature of the products cannot be controlled in slave mode	Press the "mode button for once, swite the mode from slav mode to bost mode


#### USE AND PRESERVATION

Do not use or store the unit in a highly humid, strong electromagnetic fiel strong sunlight, or high temperature light, Unplug the power supply if it is not used for a long time. Clean: Before clean, disconnect the power plug. And use wet cloth rather than any detergent or soluble liquid, avoiding of damaging the surface layer. **Power:** requirements of use. Too high or too low will affect the work. Repairing : If there is fault or performance degradation, do not unpack the shell by

yourself, avoiding damage the machine and lose the right of maintenance. When there is fault, do not hesitate to contact us, and we will do our best to deal the problem. Accessories : Please use the accessories provided by manufacturer and approved ones, in order to maximize the performance. Guarantee : Do not modify the product, or you will lose the right of maintenance. 14

#### 6 B DMX: the DMX console input and output port. value and other data

רכD screen: display brightness, color temperature, mode, channel 🕇 Color temperature adjustment button: adjust the color (3200K~5600K) 🖯 Brightness adjustent knob: adjust brightness (00~^00) (†† - keys: regulating channel (0~11) 🕄 Моde key: mode:single machine, accessory, host, DM

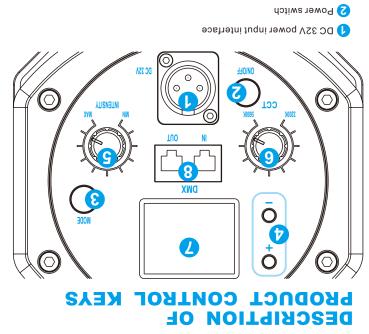

### PRECAUTIONS

- --- Light ----① The product is not waterproof, please use it in rainproof environment.
- ② The product is not anti-corrosion, therefore do not let the product touch any corrosive liquid.
- ③ When using the product, make sure the product is put firmly and prevent from falling and damage.
- 4 If the product will not be used for a long time, please switch off the power to reduce energy loss.


## --- The remote control ---

- (1) Pay attention to the polarity property of storage battery when installing storage battery.
- ② Do not mix-use old battery and new battery. ③ Please take out the battery if you will not use the remote control for long
- time. ④ Do not put any liquid on the remote control or let it flow into the remote control; liquids will cause electric leakage or circuit damage.
- $\oslash$  Do not put the remote control under the sun for long time, it will make
- the color of screen fade. Please take and put it slightly.

0 L of slavery mode light of the same aisle. (cvm-150D does not have this function) 6) Color temperature adjusting button can adjust color temperature elsis eame sight of the same 6) Intensity control button can adjust brightness the slavery mode


13


Aemote control aisle is the aisle that sets the remote control 🔥 6) The signal lamp will twinkle when pressing down the button 🔇 Power switch nəərəs yalay screen 🆒




**ESCRIPTION OF** 

- Product model : GVM-150D Brand : GVM Product Name : Photography lights Product Type : Photography Fill Light Features / Features : Joint control, high display, Lamp beads quantity : COB\*1 ♦ Color rendering index : ≥97 Color temperature : 5600K
- Light adjustment method : stepless adjustment Product Weight : 4.15KG Power : 150W Product Size(mm) : 228\*320\*315
- Product material : Aluminum alloy Voltage : AC:110-240V Power supply mode : AC input

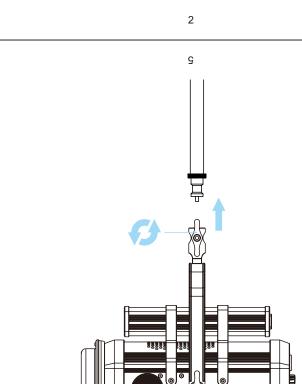



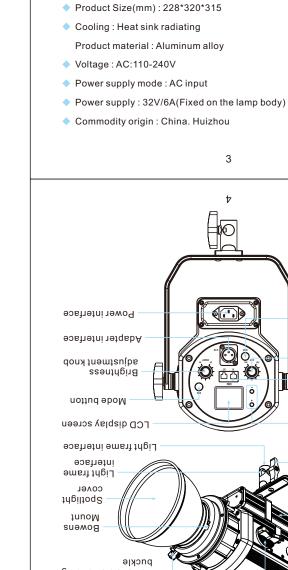

Angle fixing knob

Product model : GVM-150S

Product Name : Photography lights

Product Type : Photography Fill Light

Lamp beads quantity : COB\*1

Color temperature : 3200K~5600K

♦ Color rendering index : ≥97


Product Weight : 4.15KG


Power : 150W


Brand : GVM

Light focal length control knob **UCTURE ICON** 

- GVM-150D Product Parameter stepless light control, Console interface
- Brightness: Bare light : 40000lux/0.5m, 14000lux/1m Plus standard cover : 65000lux/0.5m, 20000lux/1n
- Cooling : Heat sink radiating
- Power supply : 32V/6A(Fixed on the lamp body)
- 🔷 Commodity origin : China. Huizhou











#### Under master mode/single machine mode, slightly pressing +/- button can set aisle value. Slightly press remote control 0~11 button to set the aisle of remote control. ⑤ Remote control : Under slaver mode, using remote control can control the brightness, color temperature and turn on/off machine of lights that are same with remote Features / Features : Joint control, high display, control aisle. stepless light control, Console interface On-line control (joint control between lamps and lanterns): Prepare over 2 sets of photo-flood lamp; set one to be master mode, set others to be slaver mode and set aisle (CH) of master/slaver mode via button of +/-. When aisle of master mode and slaver mode are same then it can synchronously control the brightness, color temperature and turn Brightness: Bare light : 38000lux/0.5m, 13000lux/1m on/off machine of slaver mode of the same aisle by adjusting brightness, Plus standard cover : 62000lux/0.5m, 19000lux/1m temperature rotary knob of the master mode. Light adjustment method : stepless adjustment 12 11 of lights that are same with remote control aisle. Under slaver mode, using remote control can adjust color temperature rotary knob can adjust color temperature. • Under master mode/single machine mode, rotating brightness adjusting ③ Adjust color temperature (CCT): range 3200K~5600K mote control aisle by using remote control. • Under slaver mode, can adjust brightness of lights that are same wit rotary knob can adjust brightness. Under master mode/single machine mode, rotating brightness adjust @BRG): range 10%~201 (BRG): range 10%~100% temperature via DMX control panel. MODE: XMD: Connect DMX control panel and adjust brightness and color they are under the same aisle. only be synchronously controlled by master mode under the condition that MODE:Slave : It can only adjust aisle; master mode and slaver mode ca synchronously. rotary knob and make the slavery machine of the same aisle also adjust And prite to the standard of the search of the start of the price by rotating the stor gainst by rotating and color temperature by rotating rota Rotate, Master, Slave, DMX. Slight press the mode button to shift mode, the mode includes: : noitoslaz aboM 🛈

Adjust CH: range 0~11

INSTRUCTION FOR USE

## **FUNCTION INSTRUCTION 8 INSTRUCTION FOR USE**

1 Mode selection : Slight press the mode button to shift mode, the mode includes: Rotate, Master, Slave, DMX. MODE:Rotate : Adjust brightness and color temperature by rotating rotary

knob. MODE:Master : Adjust brightness and color temperature by rotating the rotary knob and make the slavery machine of the same aisle also adjust synchronously.

MODE:Slave : It can only adjust aisle; master mode and slaver mode can only be synchronously controlled by master mode under the condition that they are under the same aisle. MODE:DMX : Connect DMX control panel and adjust brightness and color

temperature via DMX control panel. 2 Adjust brightness (BRG): range 10%~100%

 Under master mode/single machine mode, rotating brightness adjusting rotary knob can adjust brightness. • Under slaver mode, can adjust brightness of lights that are same with remote control aisle by using remote control.

3 Adjust color temperature (CCT): range 3200K~5600K • Under master mode/single machine mode, rotating brightness adjusting rotary knob can adjust color temperature. • Under slaver mode, using remote control can adjust color temperature

of lights that are same with remote control aisle.

11

 Adjust CH: range 0~11 Under master mode/single machine mode, slightly pressing +/- button can set aisle value. • Slightly press remote control 0~11 button to set the aisle of remote control.

**(5) Remote control :** Under slaver mode, using remote control can control the brightness, color

temperature and turn on/off machine of lights that are same with remote control aisle. On-line control (joint coi etween lamps and lanterns

Prepare over 2 sets of photo-flood lamp; set one to be master mode, set others to be slaver mode and set aisle (CH) of master/slaver mode via button of +/-. When aisle of master mode and slaver mode are same then it can synchronously control the brightness, color temperature and turn on/off machine of slaver mode of the same aisle by adjusting brightness, temperature rotary knob of the master mode.

## PRECAUTION

- ① The product is not waterproof, please use it in rainproof environment.
- ② The product is not anti-corrosion, therefore do not let the product touch any corrosive liquid.
- ③ When using the product, make sure the product is put firmly and prevent from falling and damage.
- ④ If the product will not be used for a long time, please switch off the power to reduce energy loss.

--- The remote control ---

① Pay attention to the polarity property of storage battery when installing storage battery.

- ② Do not mix-use old battery and new battery. ③ Please take out the battery if you will not use the remote control for long
- time. ④ Do not put any liquid on the remote control or let it flow into the remote
- control; liquids will cause electric leakage or circuit damage. ② Do not put the remote control under the sun for long time, it will make
- the color of screen fade. 2 Please take and put it slightly.

# AND TROUBLESHOOT

Phenomenon	Check the product	Troubleshooting
The switch indicator does not light up	Check the matching power adapter indicator light up or not.	Make sure the adapter is well contacted with the power plug
The knob of lightness and color temperature are out of control	Check if the mode were set as slave mode, lightness and color temperature of the products cannot be controlled in slave mode	Press the "mode" button for once, switch the mode from slave mode to host mode

USE AND PRESERVATION

Do not use or store the unit in a highly humid, strong electromagnetic field, strong sunlight, or high temperature light, Unplug the power supply if it is not used for a long time.

**Clean :** Before clean, disconnect the power plug. And use wet cloth rather than any detergent or soluble liquid, avoiding of damaging the surface layer. **Power:** requirements of use. Too high or too low will affect the work.

Repairing : If there is fault or performance degradation, do not unpack the shell by yourself, avoiding damage the machine and lose the right of maintenance. When there is fault, do not hesitate to contact us, and we will do our best to deal the problem. Accessories : Please use the accessories provided by manufacturer and approved

ones, in order to maximize the performance. Guarantee : Do not modify the product, or you will lose the right of maintenance. 14

Name	Quantity	Notes
Main Machine	1	
Power Cord	1	
Lamp Shade	1	
Carrying Case	1	
User Manual	1	
The remote control	1	