

材质: 105g 铜版纸 颜色: 双面彩印

尺寸: 598.5*125mm (6折7页)



USER MANUAL ST10

Need Help?


✉: Support@treatlife.tech

Tech Support: www.treatlife.tech/pages/support

ATTENTION

- The Treatlife strip light only works with 2.4G WiFi. Not support 5G WiFi.
- It is **NOT water-proof** and is designed for indoor uses.
- For RGB strip lights, you can **cut it along the golden mark**. The cut part doesn't work because there is no electrical power supply, but you can **reconnect it to the original strip with pin connectors (not included in our products)**.
- It is **not recommended to connect the strip lights in series** because of the insufficient power, and the performance of the lights will be affected a lot if they are connected in series. The length of the longest strip lights is 16.4ft (5m).
- Do not stick the Treatlife strip lights to painted wall** to avoid damaging the painted wall; It is possible that an adhesive strip lights rips the paint off, we suggest that you pull off the light strip slowly and carefully in case of damage, and do not reposition the adhesive Treatlife strip lights if unnecessary.
- Please stick the Treatlife strip lights to a clean and smooth surface**. Please use a dust-free cloth to clean the surface of the dust and oil residue, then install the light strip. Do not touch the adhesive side with your fingers. Press for 10-30 seconds after sticking it.
- Do not keep the LED strip lights on more than 2 minutes when it's in the plastic reel** in case of overheat problem.

- When install the Treatlife strip lights in the corner, you can bend the strip lights like the picture below. Do not bend or fold it excessively, so as to avoid damage.

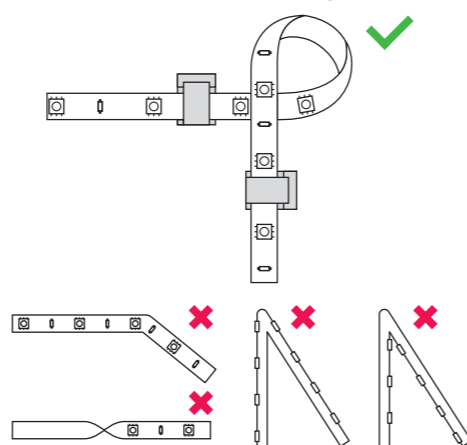


Specifications

Model	ST10
Power Input	100-240V AC, 0.8A, 50/60Hz
Power output	12V DC, 1.5A
Smart Controller Input	12V DC, 1.5A

Smart Controller Power	18W
Wireless Frequency	2.4GHz
Wireless Standard	IEEE802.11 b/g/n

Product Appearance

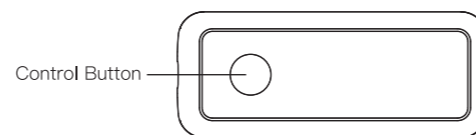

Single Press	Turn on the LED strip lights / Switch the pre-set scenes
Double Press	Turn off the LED strip lights.
Long Press the button for 5S	Reset the smart controller and initiate default mode pairing. Red LED strip lights blink rapidly.
Long Press the button for 5S again	Reset the smart controller and initiate AP mode pairing. Red LED strip lights blink slowly.

Add Devices

1. Download the TreatLife APP



Please scan the QR code or search "Treatlife" on the Apple APP Store /Google Play to download the APP.

2.Registration or Log In

Tap "Register" to create an account. Enter your email address to get a verification code and create a password. Or, choose "Log in" if you already have a TreatLife account.

3.Configure the APP to the Strip lights


Preparation: Ensure the strip light is connected to power; Ensure your phone is connected to your WiFi router and is able to connect to the internet.

Note: This strip light only supports 2.4GHz networks. If you connected to a 5GHz network before, please switch to the 2.4GHz Network

The "Indicator Light" in this manual means LED Strip Lights in Red Blinking Condition

1. Bluetooth Mode (Automatic Mode)


- First, turn on the phone's Bluetooth.
- Plug in the device and ensure it is receiving power.
- Press and hold the control button for about 5 seconds then confirm the indicator light is blinking rapidly.
- Open the "TreatLife" APP and it will find the Treatlife Strip Lights automatically.
- If the LED Strip Lights is not automatically discovered, click the "+" at the top right list and select Auto Scan to automatically search for the LED Strip Lights.
- Follow the steps in the APP to complete the pairing.

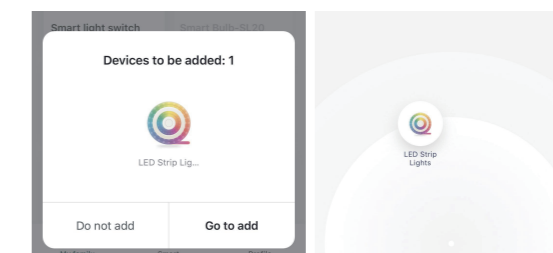

- Note:**
- Please complete the pairing process within 3 minutes after the LED Strip Lights is reset.
 - Please use one of the following pairing methods if the automatic mode above did not work.


2. EZ Mode (Manual Mode)

- Click the "+" symbol in the upper right corner of the device list, and select "LED Strip Lights" in "Smart Light" options.
- Press and hold the control button for 5 seconds until the indicator light blinks rapidly.
- Tap "Confirm indicator rapidly blink"; Enter your Wi-Fi Password; Wait for the LED Strip Lights to complete the connection.

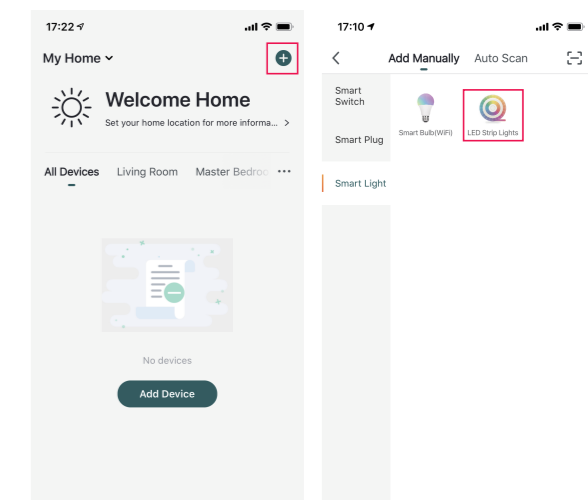


3. AP Mode

- If you can not configure the LED Strip Lights successfully with the default mode, please try to connect with AP Mode.
- Tap "AP Mode" on the top right corner.
- Press and hold the control button for 5 seconds, until the indicator light blinks rapidly. Then press and hold for 5 seconds again until the indicator light blinks slowly.
- Tap "Confirm indicator slowly blink".

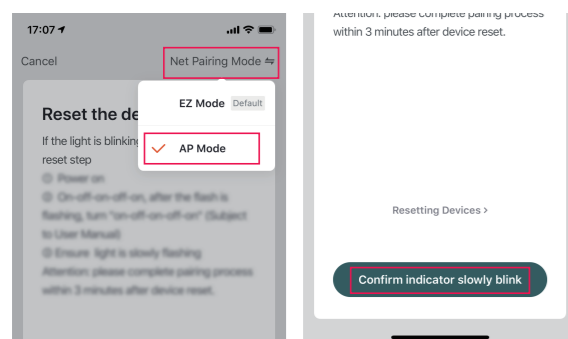


- Enter your Wi-Fi Password.
- Open WLAN settings; the Wi-Fi settings on your phone and connect to the "TreatLife-xxx" network.
- Go back to the APP and continue to add the device then wait for the connection to complete.

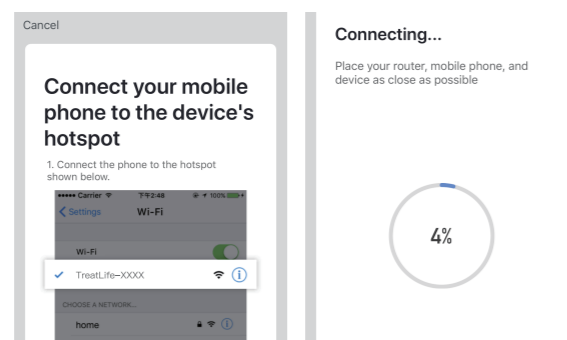


Link TreatLife to Alexa/Google Assistant
Go to TreatLife> > More for instructions to link Alexa/Google Assistant.

Note: Please log in with your TreatLife account.

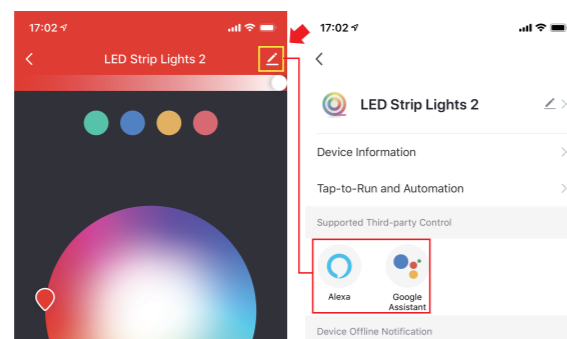

Key Steps to Link the Alexa Skill

- Sign in With Amazon, tap on "Skills & Games" in the Alexa menu;
- Search for the "Smart Life", and tap "Enable" to enable the Skill. Enter the "TreatLife" APP Account and Password, then tap "Link Now" to enable the Skill.

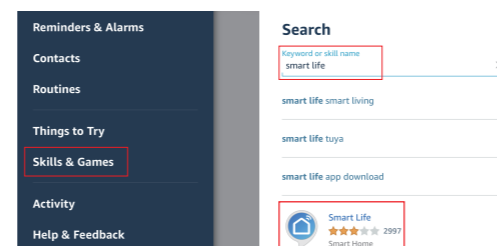

Note: If you can't use the voice control correctly, try to disable the skill from Alexa APP then re-enable it again. Or reconnect the strip lights to Smart Life App (Search "Smart Life" on the Apple APP Store /Google Play to download the APP).

Troubleshooting

Can't connect to the APP.

- Please make sure the red indicator light is blinking when you are attempting to connect to the APP. Default Mode Pairing: Red Indicator Blinking rapidly. AP mode Pairing: Red Indicator Blinking slowly.

Please finish the pairing within 3 minutes when the red indicator starts blinking. (Refer to "Me-FAQ&Feedback" in the APP)

- If your router is 2.4GHz & 5GHz dual-band, the 2.4GHz band may not be turned on. Please enter the router settings to turn on the 2.4GHz band. You can check the router's manual or contact the router's official support for help.
- Make sure you entered the correct WiFi password.

The LED Strip Lights show the wrong status in the APP.

- The network may be delayed or the network signal is weak. Try to move the router closer to the LED Strip Lights or power off the router and then power it on.

Can't connect to Alexa.

- Check whether the Alexa APP is correctly configured with the account of TreatLife APP. Refer to the manual instruction or "Me-FAQ&Feedback-All-Third-party control issues" in APP to reconnect to Alexa.

The Timing function doesn't work properly.

- Remove the LED Strip Lights from APP, and repair the LED Strip Lights to APP again; You can also check Me-> FAQ & Feedback information in the APP. If it still doesn't work, please provide the Virtual ID in the APP to us.

FCC Caution:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2)

this device must accept any interference received, including interference that may cause undesired operation. Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

RSS (Category I Equipment):

This device complies with Innovation, Science, and Economic Development Canada's licence-exempt RSS standard(s). Operation is subject to the following two conditions:

- this device may not cause interference, and
- this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

- l'appareil ne doit pas produire de brouillage, et
- l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

The device is compliance with RF exposure guidelines, users can obtain Canadian information on RF exposure and compliance. The minimum distance from body to use the device is 20cm.

Le présent appareil est conforme

Après examen de ce matériel aux conformités ou aux limites d'intensité de champ RF, les utilisateurs peuvent sur l'exposition aux radiofréquences et la conformité et compliance d'acquiescer les informations correspondantes. La distance minimale du corps à utiliser le dispositif est de 20cm.



THANK YOU

If you have any questions, please feel free to contact us first. We are always here for you.