

BESTTEN®

15A Remote Control Outdoor Outlet Switch with 6-Inch Heavy Duty Power Cord




User Manual

Specifications

Outlet	1 Grounded
Input	125V AC Power
Max Rating	1875W Resistive/1250W Tungsten/1/2 HP/TV-5
Temperature	-25 to 40°C(-13 to 104°F)
Battery	CR2032
Radio Frequency	433.92MHz
Remote Control Range	80 Feet in Line of Sight
Power Cord	6-inch SJTW 14AWG/3C
Housing	PC Resistance Burning(V-2)

Diagram

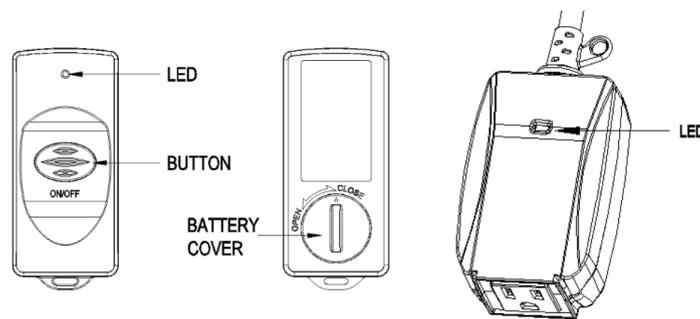

Pairing Instruction

When using for the first time, please pair the remote to the outlet using the instructions below.

1. Remove the battery cover on the remote and install one battery (Model: CR2032). Test to see if the LED on the remote comes on when the button is pushed. This will verify that the remote has power.
2. When the remote outlet is plugged into the wall outlet or other power source, the LED indicator will flash slowly indicating the outlet is in learning mode. It will remain in learning mode for 29 seconds. Press the ON/OFF button on the remote to pair with the outlet. Once paired, the LED indicator will stop flashing.
3. Test the remote with the outlet to ensure they are paired successfully. If not paired, please repeat Step 2.
4. Clear the pairing
 - a. Unplug the remote outlet and plug it back in. (LED indicator will slowly flash same as learning mode).
 - b. Press ON/OFF button of the remote, then LED indicator of outlet flashes quickly (3-4 seconds), which means pairing is cleared. After that, outlet returns to learning mode.

Helpful Tips

1. Each remote has its own unique code.
2. One outlet can be paired with max 10 remotes. If the 11th remote is paired, the outlet will unpair the 1st remote.
3. One remote can be paired with multiple outlets and control them simultaneously.

Safety Information

CAUTION: Overloading this product could increase risk of fire. Use only with a total electrical draw of maximum 15 amp/1875 watt Christmas tree or other seasonal lighting products.

* If using an extension cord for an extended period of time (greater than 90 days), please consider hard wiring a permanent outdoor-use receptacle rated for year-round use in the area that power is needed. Please contact a licensed electrician for proper installation of permanent wiring.

- * Suitable for indoor/outdoor use-store indoors while not in use.
- * Plug into ground fault protected receptacle only.

BESTTEN Products

For more products from BESTTEN, please visit our website www.ibestten.com



USB Wall Outlet Surge Protectors



Outdoor Power Stakes



Outdoor Timers



Remote Control Outlets



Metal Power Strips



Light Switches



Screwless Wallplates



Stainless Steel Wallplates



Receptacles

Warranty

BESTTEN warrants to the original customer that this product is free of defects in materials and workmanship for one year from the purchase date. Within this period, simply contact BESTTEN CARE with proof of purchase and reason of claim. We will replace the product for free.

Any product which is subject to misuse or accidental damage is excluded from this warranty.

support@ibestten.com
1-800-358-6160 (Mon-Fri 9AM-5PM PST)

For more products from BESTTEN, please visit our website www.ibestten.com.



Conforms to UL Std. 60730-1
Certified to CSA Std. E60730-1

Model: USOT-R-1A

MADE IN CHINA

Version 2.0