

LaView

# B9 OUTDOOR SECURITY CAMERA



LaView

## PRODUCT WARRANTY CARD

Your LaView product is by a 1-year warranty from the purchase date. For more information on repairs, exchanges, and other policies, please visit [www.laviewsecurity.com](http://www.laviewsecurity.com).

Please send all inquiries through the Contact Form on our website, or email us at [info@laviewusa.com](mailto:info@laviewusa.com). And our technicians would be glad to assist you.

USER MANUAL

LaView


## CATALOGUE

002	WHAT'S IN THE BOX
003	APP SET UP
006	INSTALLATION
007	TROUBLESHOOTING
008	HUMAN AND MOTION DETECTION
009	OTHERS
011	FCC COMPLIANCE
012	CUSTOMER SERVICE
013	PARAMETER
back cover	PRODUCT WARRANTY CARD

PARAMETER	
<b>Camera</b>	
Image sensor	1/2.9" Progressive Scan CMOS
IR Distance	33ft
Lens	3mm, FOV 130°
Day & night	IR Cut Filter with auto switch
<b>System</b>	
Processor	High-Performance Embedded SOC Processor
Wireless	Built-in 2.4G Wi-Fi
<b>Audio</b>	
Input	Built-in Omni-direction microphone
Output	Built-in loudspeaker
<b>Video</b>	
Compression Standard	H.264
Max. Resolution	1920 × 1080
Frame Rate	1~25fps adaptive frame rate of network
WDR	DWDR
<b>Interface</b>	
Cloud Storage	LaView Cloud Storage
<b>Local Storage</b>	
Local Storage	Micro SD Card (Max. 128G)
<b>General</b>	
Operating conditions	-4°F ~ 122°F (-20°C ~ 50°C) humidity 95% or less (non-condensing)
Power Supply	DC 12V 1A
Ingress Protection	IP65
Dimensions	6.42" x 2.8" x 6.38" (163 x 58 x 162mm)
Weight	0.65lbs(294g)

LaView

## CUSTOMER SERVICE

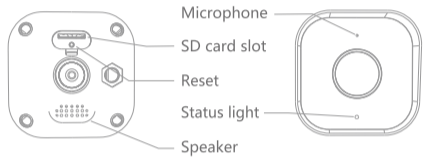

**TEL: 626-566-7550**  
Monday-Friday Hours: 9:00AM-6:00PM PST

**Email: [info@laviewusa.com](mailto:info@laviewusa.com)**  
Our professional technicians are committed to reply all your requests within 24 hours.


**Amazon**  
If you purchased from Amazon, you can also contact our professional customer service team in your Amazon account.

Power	DC 12V ± 10%
Status light	<ul style="list-style-type: none"> <li>Red light solids on: the device or network is abnormal</li> <li>Blinking red light: awaiting WiFi connecting</li> <li>Blue light solids on: camera running correctly</li> <li>Blinking blue light: currently connecting</li> </ul>
Microphone	Capture sound for your video
SD card slot	Support local SD Card storage (Max128G)
Reset	Press and hold the "RESET" for 5 seconds with pin to reset the device(Camera will return to factory default settings)

LaView

## WHAT'S IN THE BOX

PLEASE CONSULT THIS CHECKLIST FOR ALL PARTS.

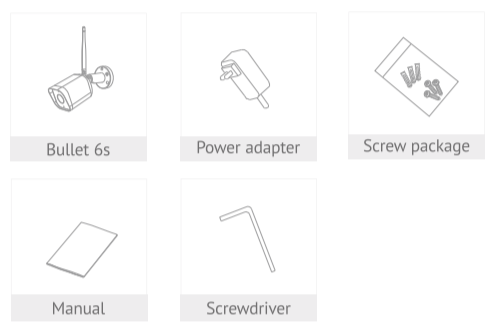

## FCC COMPLIANCE

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:  
 1- this device may not cause harmful interference,  
 2- this device must accept any interference received, including interference that may cause undesired operation.

The manufacturer is not responsible for any radio or tv interference caused by unauthorized modifications or change to this equipment. Such modifications or change could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:  
 - Reorient or relocate the receiving antenna.  
 - Increase the separation between the equipment and receiver.  
 - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.  
 - Consult the dealer or an experienced radio/TV technician for help.

RF warning statement:  
 To maintain compliance with FCC's RF exposure guidelines, this equipment should be installed and operated with a minimum distance of 20 cm between the radiator and your body.  
 which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:  
 - Reorient or relocate the receiving antenna.  
 - Increase the separation between the equipment and receiver.  
 - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.  
 - Consult the dealer or an experienced radio/TV technician for help.

RF warning statement:  
 To maintain compliance with FCC's RF exposure guidelines, this equipment should be installed and operated with a minimum distance of 20 cm between the radiator and your body.


LaView

## APP SET UP


For step-by-step Mobile APP set up instruction, please read the Quick Start Guide included in the package or check out our Youtube tutorials

### 1. DOWNLOAD AND INSTALL APP

LaView App is available for both IOS and Android OS. Search the name "LaView" in App Store or Google Play. (The other LaView apps, such as LaView Connect, LaView ONE, LaView Life do NOT support B9 camera)




Please download the LaView App from the App Store or Scan the QR Code below



### 2. NIGHT VISION

The camera is equipped with Infrad LED technology to capture black and white night vision image in detail at night. However, the night vision image quality may be affected by the following factor:

- There are high contrast light sources such as car headlight pointing to the camera

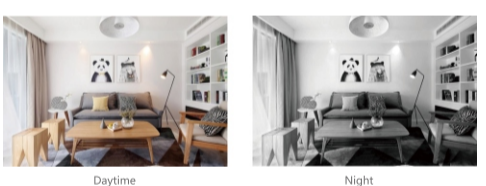


LaView

### 1. MAKE SURE YOUR PHONE IS CONNECTED TO A 2.4GHZ WIFI NETWORK

### 2. COMPLETE THE APP REGISTRATION PROCESS

### 3. FOLLOW THE IN-APP INSTRUCTION TO PAIR THE CAMERA

- Click on the "+" sign to add the camera. Continue to click "Video Surveillance" >> "Smart Camera"
- Connect the camera to power via included adapter (If you are not setting up the camera for the very first time, press the Reset button instead for 5 seconds until you hear a beep.)

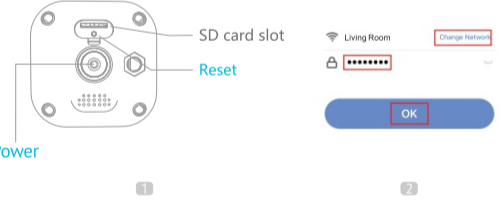

### 4. WHAT CAN I DO IF I RECEIVE TOO MANY NOTIFICATIONS?

- Ensure the Human AI detection filter is enabled
- If the camera is placed at a location with large traffic, we recommend to relocate it to a place with less traffic to receive less alerts
- Objects with human body shape such as stuffed toys may be detected as human and trigger the alerts, remove those if they constantly show up in the camera


## OTHERS

### 1. WHAT CAN I DO IF THE IMAGE IS NOT CLEAR?

- The camera is equipped with 1080p Full HD Lens and sensor to produce superior image, however the image quality may be affected by the lighting condition
- Ensure the camera is NOT facing to environment with poor lighting condition or with extreme high contrast. Ensure it is NOT facing directly to bright lighting sources such as sun light
- Ensure your phone and your router has enough bandwidth to stream HD video. A minimum of 2Mbps is required to stream each 1080p camera. If the network does not meet this requirement, the live view stream will be downgraded to SD automatically

LaView

### 1. Use the camera to scan the QR code on the phone (keep the camera 6-8 inches away from the phone)

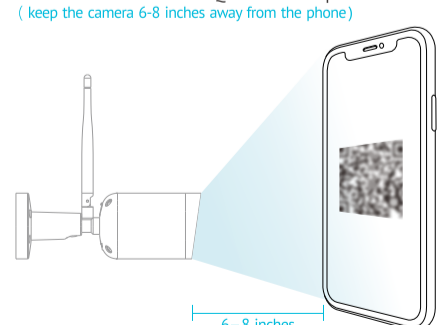

### 2. Press 'I Heard a Prompt' after the camera receives the QR code and beeps. The camera will start pairing

### 3. When connecting, you should make sure your router, mobile phone, and camera are as close as possible

### 4. Wait until the camera is connected online

### 5. Customize the camera name to differentiate cameras in different locations and finish and pairing process

### 6. If the pairing is not successful, press the Reset button for 5 seconds until you hear a beep and start again. Or check the FAQ section for more troubleshooting steps

- Check if WiFi password or router is changed. If so please reset the camera
- Ensure router is powered on and online
- Ensure camera has power
- Ensure the phone has decent network bandwidth
- Check the app is on latest version

## HUMAN AND MOTION DETECTION

### 1. HOW TO TURN ON AND OFF MOTION DETECTION?

To turn on or off motion detection and Human detection setting, go to the camera menu and click on Detection Alarm Settings

### 2. WHAT CAN I DO IF I CANNOT RECEIVE NOTIFICATIONS?


- LaView camera uses the advance 3D AI Humanoid Analysis technology that only send notifications when a human is detected
- Ensure your phone notification setting is enabled for LaView APP
- Ensure the phone has decent network bandwidth
- Ensure the camera is online

LaView

## INSTALLATION

### 1. FIND A GOOD MOUNTING SPOT

- Use the WiFi Signal Indicator (Signal 98%) in the APP live view screen to test the WiFi signal strength. Move the camera as close to the router as possible if the WiFi signal is poor

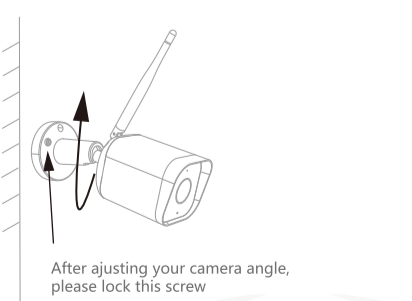

After adjusting your camera angle, please lock this screw

- Fix the Camera to the wall with screws
- Adjust camera angle to a correct view (as shown in the picture)

## TROUBLESHOOTING

### 1. IF YOU CANNOT CONNECT THE CAMERA TO THE INTERNET, CHECK THE FOLLOWING STEPS

- Ensure you are connecting to a 2.4GHz WiFi not 5GHz
- Ensure WiFi password or SSID is correct
- Ensure the camera is placed as close to the router as possible
- Ensure camera is powered on and the indicator is blinking rapidly before scanning the QR code
- Ensure you are using the correct APP (LaView)
- Ensure the camera is scanning the QR code on the phone in the correct way
- If the above steps doesn't help, reset the camera and start pairing again

### 2. WHAT CAN I DO IF THE CAMERA STOPPED WORKING?

- Close the APP and Restart the APP again