

# BESTTEN®

## 15A Remote Control Outdoor Outlet Switch with 6-Inch Heavy Duty Power Cord




### User Manual

#### Specifications

Outlet .....	2 Grounded
Power Cord .....	6-inch SJTW 14AWG/3C
Input .....	125V AC Power
Max Rating .....	1875W Resistive/1250W Tungsten/1/2 HP/TV-5
Housing .....	PC Resistance Burning(94V-2)
Temperature .....	-25 to 40°C(-13 to 104°F)
Battery .....	CR2032
Radio Frequency .....	433.92MHz
Remote Control Range .....	80 Feet in Line of Sight

#### Operation Instruction

##### A. Diagram

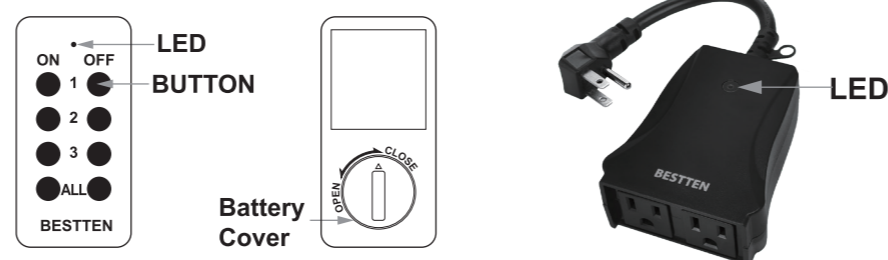

##### B. Pairing Instruction

When using for the first time, please pair the remote to the outlet using the instructions below.

**Reminder: The remote CANNOT control 2 outlets on the outdoor switch SEPARATELY.**

1. Remove the battery cover on the remote and install one battery (Model: CR2032). Test to see if the LED on the remote comes on when the button is pushed. This will verify that the remote has power.

2. When the remote outlet is plugged into the wall outlet or other power source, the LED indicator will flash slowly indicating the outlet is in learning mode. It will remain in learning mode for 29 seconds. Press the selected ON button on the remote to pair with the outlet. Once paired, the LED indicator will stop flashing.

3. Test the remote with the outlet to ensure they are paired successfully. If not paired, please repeat Step 2.

4. Clear the pairing
  - a. Unplug the remote outlet and plug it back in. (LED indicator will slowly flash same as learning mode).
  - b. Press the selected OFF button of the remote, then LED indicator of outlet flashes quickly (3-4 seconds), which means pairing is cleared. After that, outlet returns to learning mode.

5. Clear all selected outlets
  - a. Unplug the remote outlets and plug them back in. (LED indicator will slowly flash same as learning mode).
  - b. Press OFF button of ALL channel. LED indicators of the outlets flash quickly (3-4 seconds), which means pairing is cleared. After that, outlets return to learning mode.

#### Helpful Tips

1. The remote coded pattern is Random/Learning code. Repeat probability is 1/1,048,575.
2. The remote can control up to 3 channels. If one channel pairs multiple outlets, then this channel can turn them ON/OFF simultaneously.
3. ALL ON/OFF channel can turn the outlets of 1, 2 and 3 channels ON/OFF simultaneously.
4. One outlet can be paired with max 10 remotes. If the 11th remote is paired, the outlet will unpair the 1st remote.

#### Safety Information

##### Caution:

Do not install/operate this product unless the outlet it is plugged into is protected by maximum 15 Amp circuit breaker.

##### Suggestion:

- Do not plug the device into USOT-R-2A directly. Please use a circuit breaker between these two.
- If using an extension cord for an extended period of time (greater than 90 days), please consider hard wiring a permanent outdoor-use receptacle rated for year-round use in the area that power is needed. Please contact a licensed electrician for proper installation of permanent wiring.
- Suitable for indoor/outdoor use-store indoors while not in use.

#### Warnings

##### Risk of Electric Shock

- Keep children away.
- Do not plug two or more timers together.
- Always ensure the plug of any appliance is fully inserted into the timer outlet.
- If cleaning of the timer is required, unplug from power and wipe timer with a dry cloth.
- Do not immerse timer in water or any other liquid.
- Store indoor when not in use.

##### Risk of Fire

- Do not plug in an appliance where the load exceeds rated capacity.
- Do not use with extension cords.
- Do not use to control appliances that contain heating elements (cooking appliances, heaters, irons, etc.).

#### BESTTEN Products

For more products from BESTTEN, please visit our website [www.ibestten.com](http://www.ibestten.com)



USB Wall Outlet Surge Protectors



Outdoor Power Stakes



Outdoor Timers



Remote Control Outlets



Metal Power Strips



Light Switches



Screwless Wall Plates



Stainless Steel Wall Plates



Receptacles

#### Warranty

BESTTEN warrants to the original customer that this product is free of defects in materials and workmanship for one year from the purchase date. Within this period, simply contact BESTTEN CARE with proof of purchase and reason of claim. We will replace the product for free.

Any product which is subject to misuse or accidental damage is excluded from this warranty.

**support@ibestten.com**  
**1-800-358-6160 (Mon-Fri 9AM-5PM PST)**

For more products from BESTTEN, please visit our website [www.ibestten.com](http://www.ibestten.com).



Conforms to UL Std. 60730-1  
Certified to CSA Std. E60730-1

Model: USOT-R-2A

MADE IN CHINA

Version 2.0