

BLAVOR

Welcome Guide



PN-W21
Foldable Soar Panel Charger

Important safety instructions

Warning: When using this product, basic precautions should always be followed, including the following:

- Carefully read the User Manual before using the power bank.
- Close supervision is needed when power bank is used near children.
- Do not strike, hit or insert any foreign objects into the power bank or any of its ports.
- Do not expose the power bank to heavy rain/snow to avoid malfunction.
- Do not immerse the power bank into water to avoid malfunction.
- Do not disassemble or reassemble the power bank without authorization from manufacturer.
- Do not use the power bank if it has been damaged or modified. If you see bulging, swelling, leakage or other abnormality from the power bank, stop using it immediately.

Special Attention


- The suggested working/storage temperature is between -4°F and +140°F (-20°C~+60°C).
- Do not expose a power bank to fire or extreme high temperature. Exposure to fire or temperature above 176°F/80°C may cause battery swelling up or explosion.
- Do not leave the power bank on the car dashboard without supervision. Under hot weather, the temperature inside a parked car can reach above 176°F/80°C may cause battery swell up or explode.
- Do not leave the power bank on the flat surface of concrete, metal and wooden floor to have the battery being solar charged. Under strong sunlight, the surface temperature of concrete, metal and wooden floor may reach above 170°F/80°C, where the battery may swell up or explode.
- For solar panel charging, we recommend that you hang the power bank in a ventilated environment for solar charging to avoid swell up of the battery due to extremely high temperature.

Legal and the Regulatory Compliance

All BLAVOR power bank have undergone extensive tests and the strict quality control procedure. Both our factory and products are tested and certified.

- ISO 9001: Quality management system that demonstration our ability to consistently provide products and service that meet customer and applicable statutory and regulatory requirements.
- UN38.3 Test Certificate: This ensures that the battery cell used in the power bank adheres to safety standards for things like maximum continuous charge voltage, cut off voltage ,cell number, nominal voltage, discharge etc.
- MSDS Certificate: This is the Material Safety Data Sheet, all our power banks come with MSDS sheets,these sheets outline the hazardousness material with batteries, handing procedures, precaution etc.
- UL 2056 Test Certificate: A safety standards proves that the products has been gone through a series of in-depth evaluations by UL expert engineers.
- CE Certificate:All our power banks are certified with CE certificates to ensure they comply with regulations for sale in Europe Market.

PRODUCT DETAILS

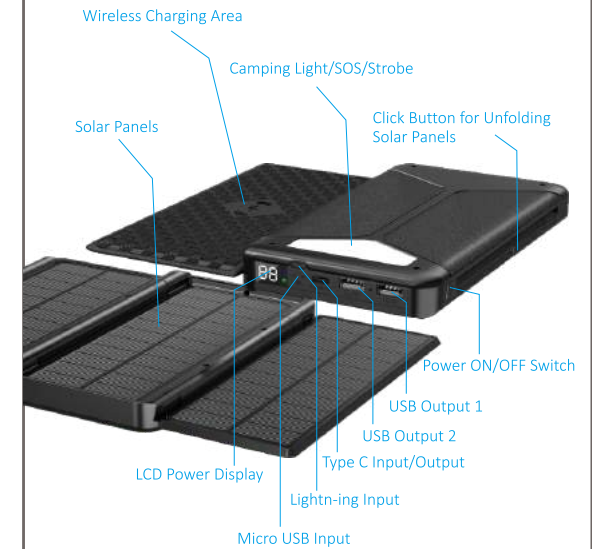

Thank you for choosing BLAVOR Wireless Solar Power Bank. Here's the instruction for your better experience

Product Parameters

Micro USB Input	DC 5V/2.1A
Lightning Input	DC5V/1A
TYPE-C Input/Output	DC5V/3A
USB1 Output	DC5V/3A (MAX)
USB output 2	DC5V/3A
Wireless Output	5W (5V=1A)
Capacity	10000mAh(37WH)
Power of LED Light	1W
Solar Charging Current	Max 960MA Under 320MA per Panel
	25000LUX Solar Light

Package Include:

- 1*BLAVOR Wireless Solar Power Bank
1*Lanyard 1*USB Cable 1*User Manual

Product Specifications:

- Exclusive appearance design, fashion, beautiful.
- Made of original A-grade polymer battery, safe, stable, and durable
- High-capacity portable power bank, support multiple USB ports output at the same time.
- With three large solar panel charging inputs, charging anytime, anywhere.
- Equipped with a LED light, convenient for outdoor use.
- Digital display of the remaining power of the power bank

Instructions:

1.Turn on/Turn off:

Press the power switch to turn on the power bank, the display shows the current power. Without the device connected, the power bank will automatically shut down after 30 seconds.

2.Charge the power bank: Solar supply

Press the OPEN switch to expand the solar panel and place the solar panel facing upward in the direct sunlight, the sunlight will be converted into electricity to charge the power bank. When the temperature is high in summer, please do not place the power bank on the concrete floor, car, and other places where heat gathers in case of battery leak or malfunctions.

Power charging

Plug the TYPE-C/Micro USB/Lightning cable into the input port, the current battery power will be displayed digitally when charging.

3.Charging cell phones and other electronic products:

Press the power switch to turn on the power bank, plug the cable into the USB output ports/Type-C port.

4. LED light:

Press and hold the power button for 3 seconds to turn on/off the LED light, when the light is on, press the button again to switch the SOS mode and the flashing mode.When you do not need to use the LED light, please turn it off to save power.

Product maintenance:

To ensure the maximum efficiency of this product, please pay attention to the following matters

- Keep away from moisture and corrosive substances.
- Do not use chemicals to clean the product.
- When the product is not used for a long time, please charge it once every six months.

Common problems and solutions:

Turn on the power switch and the display shows 00.

--Battery power is about to run out, please charge this product immediately

Unable to charge the unit.

--Replace the charger adapter and charging cable and try to charge the product again

Cannot charge the phone or other devices.

--Please plug and unplug the charging cable again to connect the cell phone and the power bank.

The power bank cannot be fully charged even being charged for a long time.

--Please use the cable equipped and the charger adapter that supports 5V/2.1A or above output.

--The current of Lightning charging is low, resulting in a long charging time, it is recommended to charge the power bank through Micro USB or Type-C input.

Warranties and after-sales service:

- Every BLAVOR product is provided with at least 12 months of warranty and lifelong technical support.
- Within 30 days from the date of purchase, products in good packaging and without damage can be returned and fully refunded. Please noted that customers will bear the shipping fee if products have no quality problems.
- A free exchange for products having quality problems within 12 months!
- If you are not 100% satisfied with our products, please feel free to contact our customer service at support@blavor.com. We attach great importance to customer feedback and will get back to you within 24 hours(excluding weekends)