



# INSTALLATION

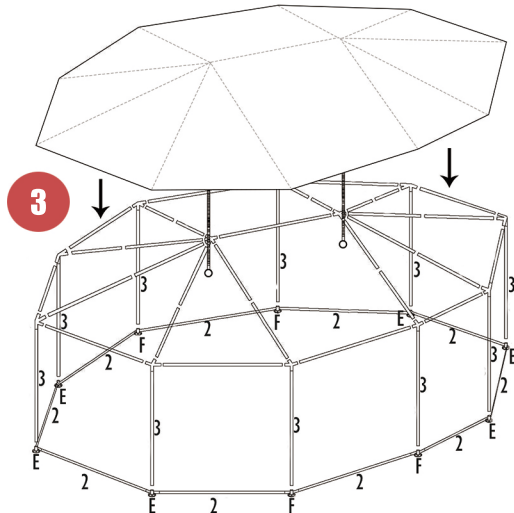

## STEP 3

Place the cover tightly over the frame and use the elastic balls to fix the cover and steel frame tightly, Then place Pole #3, #2 into the remaining outlet of the Connector A, B, C, E, F and ensure the Base Plates are at the base.

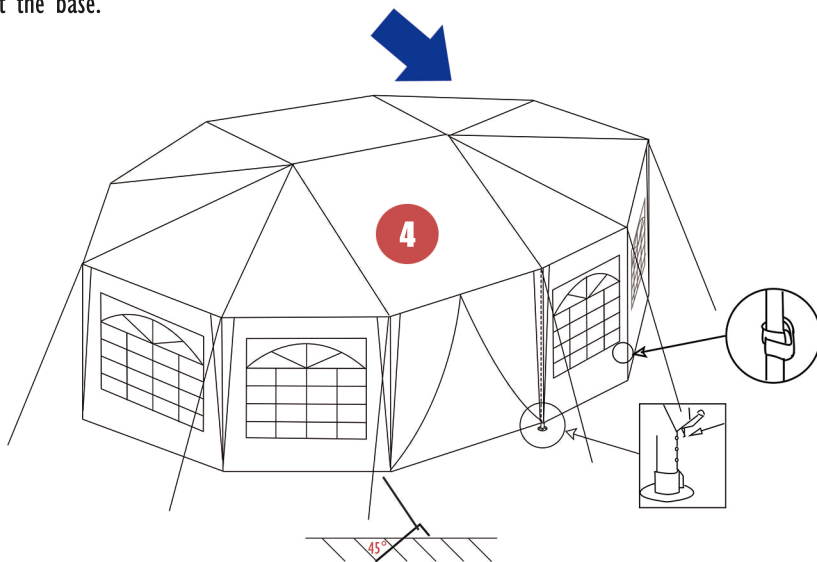

## STEP 4

Hang the side panels to the holes by the Elastic Balls. All side panels can be hung or took down separately. Pull the leg cover tight by the elastic ball and attach the metal hooks into the tube holes near the feet. If the cover becomes loose, tighten by moving the hook to a lower hole. Then secure the tent with Ropes and the Stakes. We recommend the Stakes are at a 45 degree angle in the ground facing away the tent to ensure maximum tension.