

0203 PM Coupler

C3300-P



1x2 633 nm PM Fused Coupler, 1/99

The coupler is a 1x2 633 nm 1/99 PM fused coupler. The coupler offers very low insertion loss and high extinction ratio. It can be used for fiber sensor, power monitor and coherent communication.


FEATURES

- High Stability & Reliability
- Low Insertion Loss

USE IN

- Coherent Communication
- Power Monitor
- Fiber Sensor

MECHANICAL DRAWING

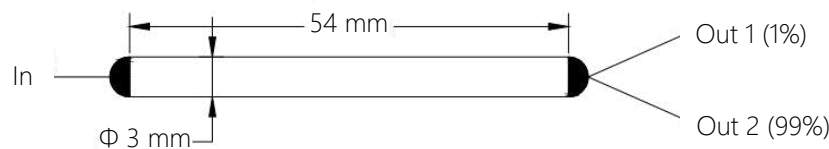

Center Wavelength	633 nm
Operating Bandwidth	±5 nm
Excess Loss	1.2 dB max.
Extinction Ratio	18 dB min.
Directivity	50 dB min.
Return Loss	50 dB min.
Power Handling	300 mW max.
Fiber Type	PM Panda Fiber
Dimension	3x3x54 mm
Operating Temperature	-5°C to +75°C
Storage Temperature	-40°C to +85°C
Splitting Ratio	1%, ±0.3
Axis Alignment	Both Axis Working

* With connectors, the handling power is 1 W only, IL is 0.3 dB higher, RL is 5 dB lower, and ER is 2 dB lower.

Order notes to our customers: The default parameters are as follows. For special needs, please contact sales.
Connector FC/APC, 900 um, 1 m by default for all devices except for high power devices.