

## 0203 PM Coupler

C3401-P



### 2x2 532 nm PM Fused Coupler, 50/50

The coupler is a 2x2 532 nm 50/50 PM fused coupler. The coupler offers very low insertion loss and high extinction ratio. It can be used for fiber sensor, power monitor and coherent communication.


#### FEATURES

- High Stability & Reliability
- Low Insertion Loss

#### USE IN

- Coherent Communication
- Power Monitor
- Fiber Sensor

#### MECHANICAL DRAWING

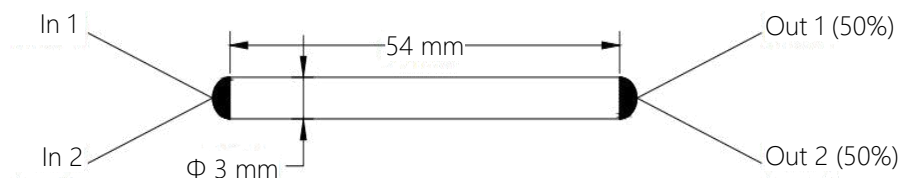

Center Wavelength	532 nm
Operating Bandwidth	±5 nm
Excess Loss	1.4 dB max.
Extinction Ratio	18 dB min.
Directivity	50 dB min.
Return Loss	50 dB min.
Power Handling	300 mW max.
Fiber Type	PM Panda Fiber
Dimension	3x3x54 mm
Operating Temperature	-5°C to +75°C
Storage Temperature	-40°C to +85°C
Splitting Ratio	50%, ±3.0
Axis Alignment	Both Axis Working

\* With connectors, the handling power is 1 W only, IL is 0.3 dB higher, RL is 5 dB lower, and ER is 2 dB lower.

**Order notes to our customers:** The default parameters are as follows. For special needs, please contact sales.  
**Connector FC/APC, 900 um, 1 m by default for all devices except for high power devices.**