

0203 PM Coupler

C3900-P



3x3 780 nm PM Fused Coupler, 33/33/33

The C3900-P can offers high power handling, low insertion loss and high stability & reliability. It can be used for fiber sensor, power monitor and coherent communication.


FEATURES

- High Power Handling
- Low Insertion Loss
- High Stability & Reliability

USE IN

- Coherent Communication
- Power Monitor
- Fiber Sensor

MECHANICAL DRAWING

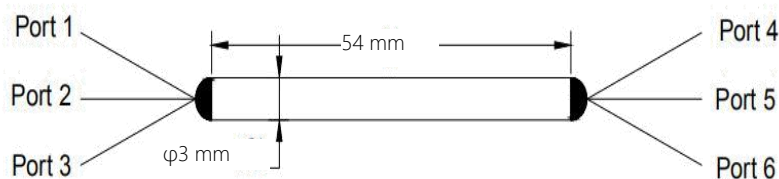

Center Wavelength	780 nm	
Operating Bandwidth	±10 nm	
Excess Loss	1.2 dB max.	
Extinction Ratio	18 dB min.	
Splitting Ratio	33%:33%:33%	
Splitting Ratio Tolerance	±4%	
Directivity	50 dB min.	
Return Loss	50 dB min.	
Optical Power(CW)	2 W max.	
Fiber Type	PM Panda Fiber	
Package Dimensions	Bare Fiber	3x3x54 mm
	900um Loose Tube	4x4x70 mm
Operating Temperature	-5°C to +70°C	
Storage Temperature	-40°C to +85°C	

* With connectors, the handling power is 1 W only, IL is 0.3 dB higher, RL is 5 dB lower, ER is 2 dB lower.

* Connector key is aligned to slow axis