

TAILAGTE GAS STRUTS INSTALLATION GUIDE



MITSUBISHI TRITON 2015-2020

Please read this guide carefully before installation



Fieyred, founded in March, 2016 and born of the passion to fulfill four-wheel drive lovers' demand for affordable, yet high quality 4x4 equipment, takes prides in designing, engineering and providing rock solid 4x4 products to let you rediscover the fun of off-roading.

Based in the United States, Fieryred is a professional supplier of 4x4 equipment, currently provides off-road recovery gears & tools as well as aftermarket vehicle parts that are designed to offer you ultimate experience with exceptional value.

It is the passion, coupled with a continuing commitment to quality and unswerving dedication to customer, that distinguishes Fieryred from the competition. At Fieryred, we strive to excel your expectation, and permeate that conviction into every product that wears the Fieryred brand.

Wherever your passion takes you, Make Your Own Path.



KEY INFORMATION & SAFETY RECOMMENDATIONS

- The Fieryred tailgate gas struts are designed for Mitsubishi Triton 2015-2020 ONLY.
- It is highly advisable to consult a qualified expert or someone who is experienced in changing gas struts if possible.
- The Fieryred gas struts are maintenance free, DO NOT grease or lubricate shaft.
- DO NOT try to open or drill into a gas strut, because it is filled with oil and high pressure gas.
- For your safety, gas struts should always be replaced in pairs.
- Check the fitting points on the body of the vehicle and repair or replace them if they are damaged.
- This gas strut's elevating abilities deteriorate progressively as temperatures get colder.

PACKAGE LIST

1 PC(s) Easy Up Strut

- 1 PC(s) Slow Down Strut
- 2 PC(s) Cables
- 2 PC(s) Cable Bolts
- 2 PC(s) Ball Studs
- 2 PC(s) Washers(small)
- 2PC(s)Washers(big)





INSTALLATION INSTRUCTIONS



1. Please remove the tailgate protector.



2. Then remove the inspection protector.



3. Remove the cable from the bracket on the driver's side.





4. Remove the cable bracket from the tailgate.




5. Remove the cable from the body with a 14mm socket.



6. Remove the lower bolt from the door strike with a 12mm socket.



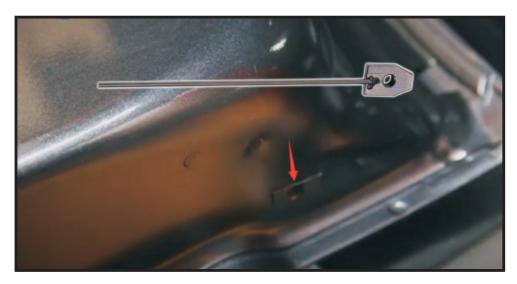

7. Place the nut inside the tailgate by using the wire to guide it.



8. Hold the wire with one hand and attach the lower bracket with the washer and screw supplied.



9. Slide the small hole end of the cable over the down strut.





10. Fit the lower bolt hole of the door strike bracket (removed in step 6).



11. Attach the cable to the other end by using the shoulder bolt provided, and ensure the washer goes on first.



12. Pull the strut down and push onto the ball stud.





13. Clean the tailgate lip as shown.





14. Stick the locating rubber as shown.





15. Repeat the procedure on the passenger side for the up strut, and remove the spacer once installed.



WARRANTY

Fieryred warrants that each of its tailgate gas strut that is purchased while this Warranty is in effect will be free from defects in materials and workmanship for a period of 1 Year from the date of receiving the product from Fieryred or its authorized distributor/dealer. If it is believable to be defective during the 1-Year Warranty Period, Fieryred will, at its option, repair it, replace it with the same or similar product, or will issue a refund for the defective Fieryred product. And Fieryred will pay for the cost of shipping or transportation of a defective component. This warranty terminates if a purchaser transfers the product to any other person. And please retain your purchase receipt for your records.

Please ensure that the Fieryred gas strut should be fit in accordance with the key information and safety recommendations listed in the user manual, and should be used for the purpose for which it was designed.

Any and all warranty coverage does not cover: normal wear and tear, incorrect fitting, unauthorized modifications, damages caused by incorrect mounting or incorrect use, damages caused by an accident, damages as a result of failure to follow information in the user manual, improper or negligent use or misuse, using the Fieryred gas struts other than for the purpose for which it was originally designed, failure to follow relevant vehicle safety and compliance laws, improper repair, abuse, acts of nature, terrorism, vandalism, collision, road hazards or adverse conditions.

If further information or investigation is required or if the claim does not meet the requirements under our warranty, Fieryred'll let you know.

For more information, please visit https://fieryred.com/