

Project Name:	
Location:	
Item #:	Qty:
Model:	

## **ELECTRIC STEAM TABLES**

R/I	n	n	г	
IVI	U	U	E	L:

BVST-2-120



BVST-4-120

BVST-2-240

BVST-3-240

BVST-4-240

BVST-5-240



**ELECTRIC** 

-120 Models: 120V / 60Hz / 1Ph

NEMA 5-15P NEMA 5-20P





-240 Models: 208-230V / 50-60Hz / 1Ph

NEMA 6-20P



NEMA 6-30P

## **3RD PARTY APPROVALS**





Bevles • 1525 East Lake Road • Erie, PA 16511

Toll Free: 1-833-537-3307 • Sales@BevLes.com • www.BevLes.com

BevLes dry well steam tables are engineered for efficiency. Each well features a single formed calrod heating element with independent temperature control, designed to hold a variety of foods at precise serving temperature. Dry wells can be used with standard steam table pans or with optional spillage pans when additional moisture is needed.

## FEATURES AND CONSTRUCTION

- Heavy duty stainless steel top and well liners with 1" insulation on all four sides and bottom
- Each well provides precise individual infinite control
- Supplied with 8" wide x ½" thick polyethylene cutting board
- Well openings measure 12" x 20" x 8" deep
- Legs constructed of galvanized steel with adjustable feet
- Adjustable galvanized steel undershelf
- Red LED indicator lights display which wells are "ON"

## **AVAILABLE OPTIONS -**

- TC5-5B Four 5" diameter locking swivel casters
- BVWP 12" x 20" spillage pan
- 12" Wide over shelf:

BVOS-12-2 12" Wide for 2 wells

BVOS-12-3 12" Wide for 3 wells

BVOS-12-4 12" Wide for 4 wells

BVOS-12-5 12" Wide for 5 wells

18" Wide over shelf:

BVOS-18-2 18" Wide for 2 wells

BVOS-18-3 18" Wide for 3 wells

BVOS-18-4 18" Wide for 4 wells

BVOS-18-5 18" Wide for 5 wells

12" Wide sneeze guard:

BVSG-12-2 12" Wide for 2 wells

BVSG-12-3 12" Wide for 3 wells

BVSG-12-4 12" Wide for 4 wells

BVSG-12-5 12" Wide for 5 wells

18" Wide sneeze guard:


BVSG-18-2 18" Wide for 2 wells


BVSG-18-3 18" Wide for 3 wells

BVSG-18-4 18" Wide for 4 wells

BVSG-18-5 18" Wide for 5 wells

FRONT VIEW SIDE VIEW



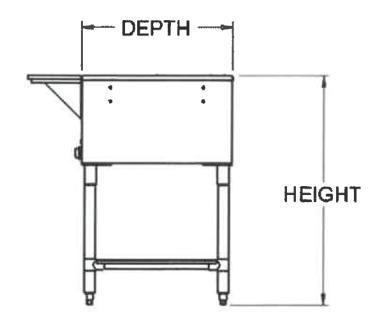

MODEL	VOLTAGE	WATTS	PLUG	WIDTH	DEPTH	HEIGHT	SHIPPING WEIGHT
BVST-2-120	120V / 60Hz / 1 Ph	1000N	EMA 5-15P	30" 762 mm	22" 572 mm	34" 864 mm	95 lbs 43 kg
BVST-3-120	120V / 60Hz / 1 Ph	1500N	EMA 5-15P	44" 1118 mm	22" 572 mm	34" 864 mm	128 lbs 58 kg
BVST-4-120	120V / 60Hz / 1 Ph	2000N	EMA 5-20P	58" 1473 mm	22" 572 mm	34" 864 mm	160 lbs 73 kg
BVST-2-240	208-230V / 50-60Hz / 1 Ph	1500 / 2000N	EMA 6-20P	30" 762 mm	22" 572 mm	34" 864 mm	95 lbs 43 kg
BVST-3-240	208-230V / 50-60Hz / 1 Ph	2250 / 3000N	EMA 6-20P	44" 1118 mm	22" 572 mm	34" 864 mm	128 lbs 58 kg
BVST-4-240	208-230V / 50-60Hz / 1 Ph	3000 / 4000N	EMA 6-30P	58" 1473 mm	22" 572 mm	34" 864 mm	160 lbs 73 kg
BVST-5-240	208-230V / 50-60Hz / 1 Ph	3750 / 5000N	EMA 6-30P	72" 1828 mm	22" 572 mm	34" 864 mm	197 lbs 89 kg