



Project Name: _____

Location: _____

Item #: _____ Qty: _____

Model: _____

TENDER TOUCH ROAST & HOLD OVENS (ADJUSTABLE)

MODEL: HRHO44W6 HRHO60W9



HRHO44W6
Shown

BevLes Tender Touch Roast & Hold Ovens feature all-stainless steel construction, insulated tops, sides, and doors, with magnetic gaskets, and a cool-touch door latch. User friendly top-mounted touch screen controls allows cooking by time or with internal temperature cooking probe. Gentle convection heating system utilizes side-to-side even air flow heating for superior results.

CONSTRUCTION

- Exterior: 20 ga 304 #3 finish stainless steel
- Interior: 22 ga 304 2B finish stainless steel
- Internal framework: 18 ga 304 stainless steel
- Fully insulated doors, back, sides, top and base
- Latch: Heavy-duty magnetic door latch with cool-to-touch handle and turn knob lock
- Hinges: Heavy-duty lift off self-closing, chrome plated
- Door gasket: magnetic NSF approved Santoprene
- Base: .125 Formed aluminum with welded corners

FEATURES

- Programmable Tender Touch controls allows you to cook by time, or probe, save and recall recipes
- Temperature adjustable from 80°F (26.7°C) to 300°F (149°C) for roasting and holding a variety of foods
- Automatically switches to holding temperature at the end of cook cycle
- Audio alarm for end of cycle
- Fully insulated cabinet prevents heat loss, side air tunnel system circulates air evenly throughout the cabinet with minimal heat loss when doors are opened
- Removable interior components for quick and easy cleaning
- Adjustable welded stainless steel wire pan supports
- Heavy-duty plate casters with 5" neoprene wheels, front two with brakes
- Heavy-duty field reversible doors with self-closing lift off hinges and magnetic latches
- Recessed stainless steel side mounted pull grips provide easy mobility (front and rear)

ELECTRIC

120V / 60Hz / 1Ph
(208-230V / 50-60Hz / 1Ph is available as an option)
8' NEMA 5-20P cord set included



NEMA 5-20P

3RD PARTY APPROVALS






TENDER TOUCH ROAST & HOLD OVENS (ADJUSTABLE)

FRONT VIEW

REAR VIEW

SIDE VIEW

TOP VIEW

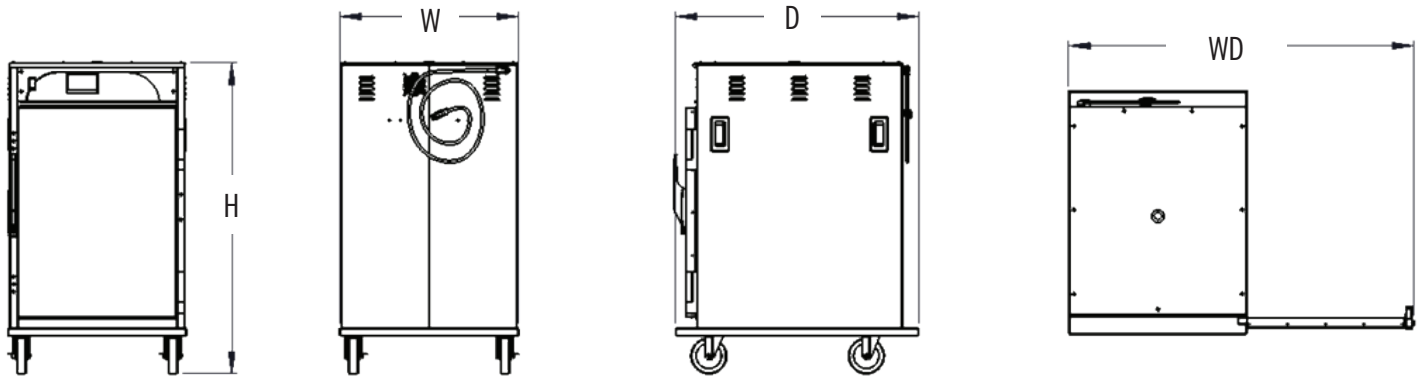

MODEL	CAPACITY 18x26 / 12x20 / *SPACING	WIDTH (W)	DEPTH (D)	HEIGHT (H)	WIDTH WITH DOOR OPEN (WD)	INTERNAL HEIGHT	VOLTAGE	WATTS	AMPS	PLUG	UNIT WEIGHT / SHIPPING WEIGHT	CLEARANCES
HRHO44W6	6 / 12 / 4.5"	28" 710 mm	34" 870 mm	43.5" 1110 mm	54.25" 1378 mm	28" 710 mm	120V / 60Hz / 1 Ph	1900	16	NEMA 5-20P	215 lbs / 98 kg 265 lbs / 120 kg	Zero Clearance Cabinet
HRHO60W9	9 / 18 / 4.5"	28" 710 mm	34" 870 mm	58.5" 1490 mm	54.25" 1378 mm	58" 1480 mm	120V / 60Hz / 1Ph	1900	16	NEMA 5-20P	255 lbs / 116 kg 305 lbs / 138 kg	Zero Clearance Cabinet

* Adjustable on 1.50" centers. Also accommodates 19" x 19"

AVAILABLE OPTIONS & ACCESSORIES

- Left hand door hinging
- Stainless steel push handles
- Magnetic latch with key lock
- Corner bumpers of gray non-marking vinyl (set of 4)
- Perimeter bumper of gray non-marking vinyl
- Additional universal pan supports
- 6" stainless steel legs with adjustable feet for stationary floor installation *
- 6" casters with soft rubber wheels
- 18" x 26" chrome electroplated wire racks
- 208-230-50/60Hz electrical service