



Project Name: _____

Location: _____

Item #: _____ Qty: _____

Model: _____

TEMPER SELECT HEATED HOLDING CABINETS (ADJUSTABLE)

MODEL: HTSS34W4 HTSS44W6 HTSS60W9 HTSS74W12

BevLes Temper Select Heated Holding Cabinets are constructed of stainless steel, full insulated and available in 4 models that provide uniform temperature control by providing gentle convection heat that completely surrounds food for even heat and holding and adds just a touch of humidity when you really need it.



HTSS34W4



HTSS44W6



HTSS60W9



HTSS74W12

CONSTRUCTION


- Exterior: 20 ga 304 #3 finish stainless steel
- Interior: 22 ga 304 2B finish stainless steel
- Exterior door panel: 20 ga 304 #3 stainless steel
- Interior door panel: 22 ga 400 BA finish stainless steel
- Internal framework: 18 ga 304 stainless steel
- .125 Formed aluminum base with welded corners
- 22 ga 304 2B Stainless steel side air ducts
- Fully insulated doors, back, sides, top and base
- Heavy-duty field reversible doors with self-closing lift off hinges and magnetic latches

FEATURES

- Adjustable welded wire, universal 304 stainless steel pan supports on 1.5" centers
- Temperature adjustable from 70°F (21°C) to 215°F (102°C)
- Removable top water pan provides additional humidity for hard to hold items
- Recessed stainless steel side mounted pull grips provide easy mobility (front and rear)
- Cool-to-touch handle(s) and turn knob lock
- Magnetic NSF approved Santoprene door gaskets
- Removable interior components for quick and easy cleaning
- Top mounted dual coil heating unit elements rated at 600 watts @120v, or 1000 watts @ 208-230v
- Easy to operate controls feature precision variable thermostat and dial thermometer
- Heavy-duty plate casters, with 5" neoprene wheels; all swivel, with wheel brakes on front two casters

ELECTRIC

120V / 60Hz / 1Ph
(208-230V / 50-60Hz / 1Ph is available as an option)
8' NEMA 5-15P cord set included




NEMA 5-15P

3RD PARTY APPROVALS





TEMPER SELECT HEATED HOLDING CABINETS (ADJUSTABLE)

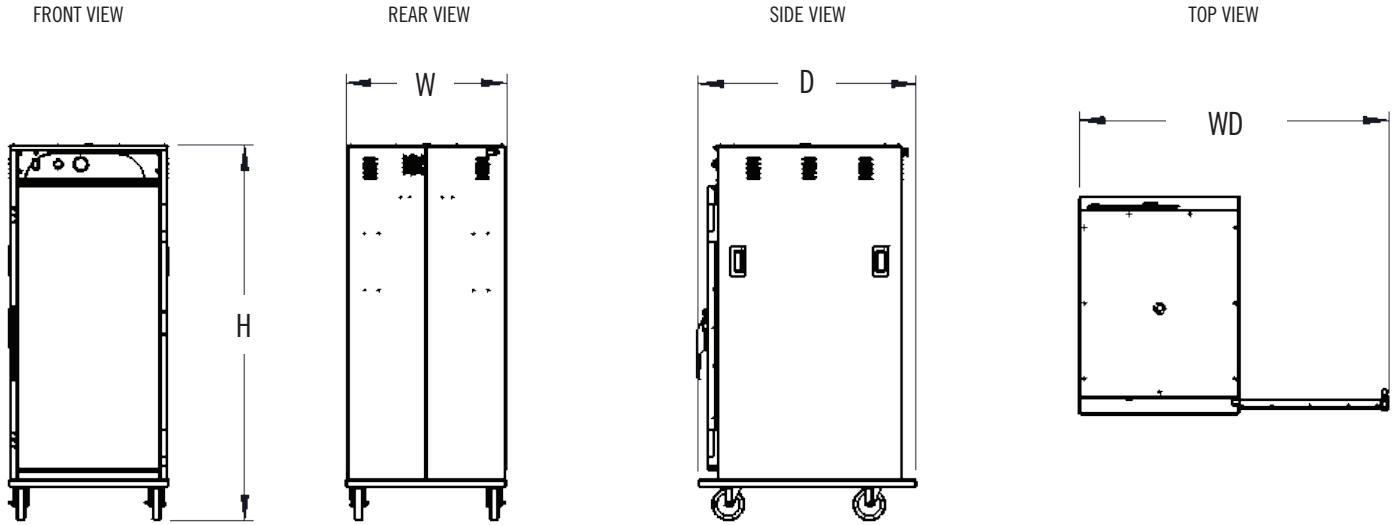

MODEL	CAPACITY 18x26 / 12x20 / *SPACING	WIDTH (W)	DEPTH (D)	HEIGHT (H)	WIDTH WITH DOOR OPEN (WD)	INTERNAL HEIGHT	VOLTAGE	WATTS	AMPS	PLUG	UNIT WEIGHT / SHIPPING WEIGHT	CLEARANCES
HTSS34W4	4 / 8 / 4.5"	28" 710 mm	34" 870 mm	32.44" 830 mm	54.25" 1378 mm	19" 480 mm	120V / 60Hz / 1 Ph	1200	15	NEMA 5-15P	180 lbs / 82 kg 230 lbs / 105 kg	Zero Clearance Cabinet
HTSS44W6	6 / 12 / 4.5"	28" 710 mm	34" 870 mm	43.5" 1110 mm	54.25" 1378 mm	28" 710 mm	120V / 60Hz / 1 Ph	1200	15	NEMA 5-15P	215 lbs / 98 kg 265 lbs / 120 kg	Zero Clearance Cabinet
HTSS60W9	9 / 18 / 4.5"	28" 710 mm	34" 870 mm	58.5" 1490 mm	54.25" 1378 mm	43" 1090 mm	120V / 60Hz / 1 Ph	1200	15	NEMA 5-15P	285 lbs / 130 kg 335 lbs / 152 kg	Zero Clearance Cabinet
HTSS74W12	12 / 24 / 4.5"	28" 710 mm	34" 870 mm	73.75" 1870 mm	54.25" 1378 mm	58" 1480 mm	120V / 60Hz / 1Ph	1200	15	NEMA 5-15P	335 lbs / 152 kg 385 lbs / 175 kg	Zero Clearance Cabinet

* Adjustable on 1.5" centers. Also accommodates 19" x 19" and 23" x 23" screens

AVAILABLE OPTIONS & ACCESSORIES

- Left hand door hinging
- Stainless steel push handles
- Magnetic latch with key lock
- Corner bumpers of gray non-marking vinyl (set of 4)
- Perimeter bumper of gray non-marking vinyl
- Additional universal pan supports
- 6" stainless steel legs with adjustable feet for stationary floor installation
- 6" casters with soft rubber wheels
- 18" x 26" chrome electroplated wire racks
- 208-230-50/60Hz electrical service