

Wirele Smart Switches User Manual

English

This Manual applies to:
WiFi Switches, WiFi Switches without Neutral, Zigbee Switches, Zigbee Switches, without Neutral.

This manual is for reference only. The specific parameters and functions of the product may be different, Please refer to the received product.

Warning

RISK OF ELECTRIC SHOCK OR FIRE

1. Make sure you have totally cut off the power supply for the wall switch you are replacing.
2. Do not install the wall switch with wet hands or when standing on wet surfaces.
3. Do not use beyond maximum load.

Installation

As shown in the wiring diagram below, insert wires into the corresponding terminal holes and fasten them. take down the panel, use two screws to fix the switch into the wall box and cover the panel. for different models, the terminal positions may not be the same, follow the sign on the product to connect the wires.

Wiring Diagram

Diagram 1: For Switches with Neutral

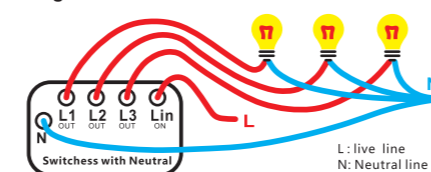


Diagram 2: For Zigbee Switches Without Neutral
Zigbee Switches without neutral is suitable for 5 to 200W, if the light flashes or glows when the switch turned off, it is recommended to replace a more powerful bulb.


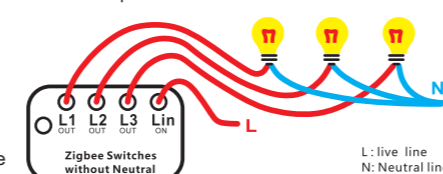


Diagram 3: For WiFi Switches without Neutral

For WiFi Switches without neutral, an adaptor capacitor, needs to be paralleled to the load light of L1, otherwise, the device may not work properly. We have provided an adaptor capacitor in product box. Please install it according to the illustration below.

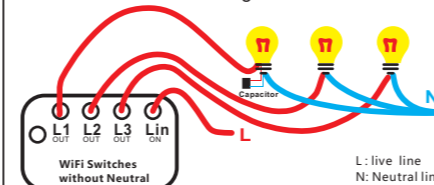

Add Device to APP

1. Download the Smart Life APP. Scan the following QR Code or search "Smart Life" in APP Store or Google Play.



2. Preparations before started:

For WiFi switches, A networkable WiFi router is required, the WiFi switches only supports 2.4GHz WiFi works. For Zigbee switches, A Zigbee gateway is required, the Zigbee gateway should be successfully configured before pairing Zigbee switches.

3. Power up the wall switch, Then Press and hold the button (for about 5 seconds for WiFi switches/10 seconds for Zigbee switches) until the wireless LED blinks to enter into pairing mode.

4. Open the APP "Smart Life", home page, tap the icon "+" on the top right into add manually, then do the following for adding.

For WiFi switches, Tap Electrical >> Switch (WiFi) Enter into "Add Device", choose the WiFi and input password, if no password, keep it blank, Then follow the prompts. For Zigbee switches, Tap Electrical >> Switch (Zigbee) Enter into "Add Device", Then Select the Zigbee gateway and follow the prompts.

Connect with Voice Services

Refer to the guidance in APP, here below are the steps: First page >> More Services >> Voice Services.

Rf433 Remote Pairing

1. This part is only for switches with RF features,
2. You need to prepare a RF remote controller before pairing.
3. RF pairing may caused device deleted from APP, if so, please add it again when the RF pairing is complete.

RF Pairing Guide:

- ① Press a wall switch button and hold it for about 10 seconds until hear a beep or the blue LED blinks once, then press a button of remote control, when the beep or blue LED respond again, it means successfully paired.
- ② Press a wall switch button and hold it for about 15 seconds until hear two consecutive beeps or the blue LED blinks twice, then press a button of remote control, the beep or the blue LED respond again, after doing this, when this button of remote control pressed, every gang of this wall switch will be turn ON/OFF.
- ③ Press a wall switch button and hold it for about 20 seconds until hear three consecutive beeps or the blue LED blinks thrice, then all RF Pairing settings will be cleaned up.

