




58502

SMART BLINDS USER GUIDE

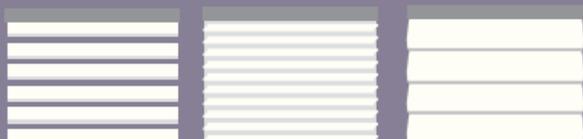

WHY GRAYWIND?

We are a group of seekers for perfect life, looking for inspiration from the purest light and shadows. What we want to share is not only window decoration, but also technology, art and customization. We are committed to bringing convenient, pleasant and elegant life experience to every customer.



Ultra Smart Life

Graywind embraces technology and persists in continual innovation as well as creating a brand new smart life experience, bringing our user a more convenient, safer and more enjoyable living environment.



Explore Pure Beauty

Graywind represents the harmony between light and shadows, which grants the space graceful versatility and artistic sight. Our users can seek for the beauty of life and enjoy happiness.



Enjoy Freedom

Graywind refuses to be mediocre and releases unique true self. We offer stylish designed product to our users. They can delight themselves, show themselves and release themselves without restriction of rule and enjoy from the freedom.



SOCIALIZE WITH US





SATISFIED

If your motorized blinds are running without any issues, we invite you to activate product warranty.

1. Search **graywindblinds.com** or scan **QR code** to visit our website.
2. Register and click account to enter personal page.
3. Choose Product Activation tab, fill in info & order id, then submit.
4. Activation done.



DISSATISFIED

- We will pre-program and double check before shipment. For battery motors, please charge them for 8-10 hours before first use.
- If the parcel you received isn't in good condition, please take photos and confirm whether they still work.
- Any after-sales questions, please scan the **QR code** and contact us. We are always at service 24/7.
- **Customer Service:**
service@graywindhome.com



CONTENTS

A

PARAMETERS

| | |
|----------------------------------|-----|
| A-1. Motor | |
| Zigbee & Bluetooth Battery Motor | 1-2 |
| Wifi Hardwired Motor | 3 |
| A-2. Aeolus® Remote Control | 4 |
| Install The Battery | 5 |
| Parameters | 6-7 |

B

INSTALLATION

| | |
|--|-------|
| B-1. Preparation | 8 |
| B-2. Accessories | 9 |
| B-3. Installation Of Blind With Valance | |
| Inside Mount | 10-11 |
| Outside Mount | 12-14 |
| B-4. Installation Of Blind Without Valance | |
| Inside Mount | 15-16 |
| Outside Mount | 17-18 |
| B-5. Take Down The Blind | 19 |

C

APP CONTROL

| | |
|------------------------------|-------|
| C-1. Zigbee Battery Motor | 20-25 |
| C-2. Bluetooth Battery Motor | 26 |
| C-3. Wifi Hardwired Motor | 27 |

D

REMOTE CONTROL PROGRAMMING

| | |
|-------------------------|-------|
| D-1. Sleep Mode | 28-29 |
| D-2. Enter Setting Mode | 30 |
| D-3. Clock Setting | 31 |
| D-4. Timing Setting | 32-35 |
| D-5. Motor Programming | 36-43 |


A. PARAMETERS

A-1 MOTOR




ZIGBEE & BLUETOOTH BATTERY MOTOR



The motor is in non-signaled state when received. Please remove the blocker to wake it up.

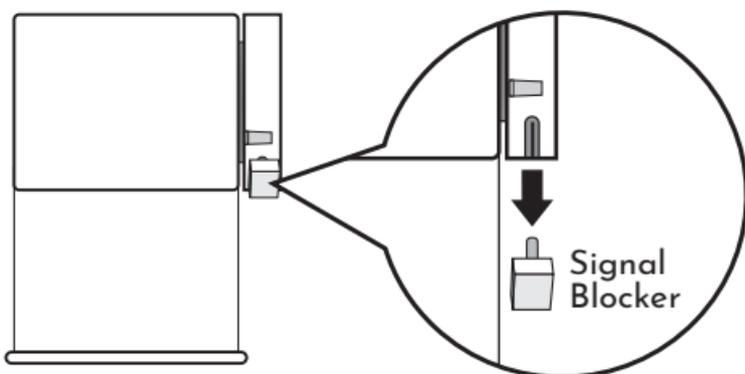

The motor is in sleep mode when received. Please refer to P28 for unlocking.

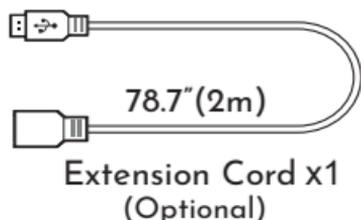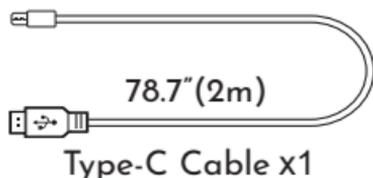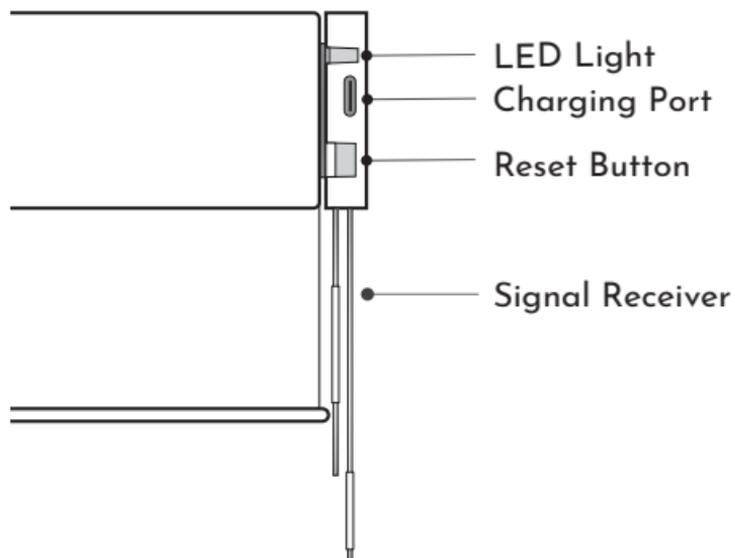



Charger
(Not included)




Solar Panel
(Optional)




1. Please fully charge the motor for more than 8 hours before the first use.
2. Once fully charged, it can be used for 3-6 months depending on the frequency of use.




Out of power:
Orange Light Flashing

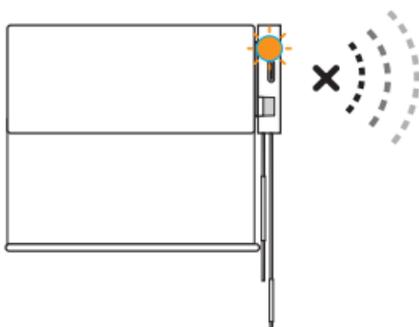

Under Charging:
Blue Light Flashing


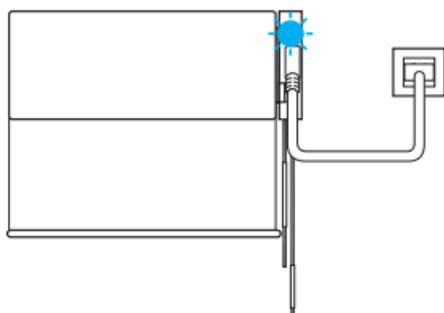


Fully Charged:
Solid Blue

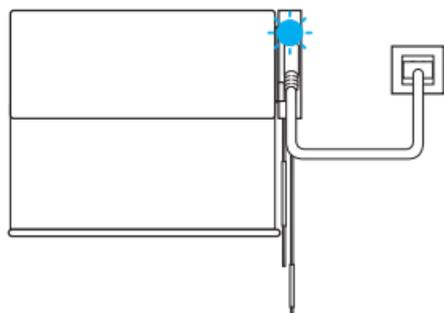

WIFI HARDWIRED MOTOR

3

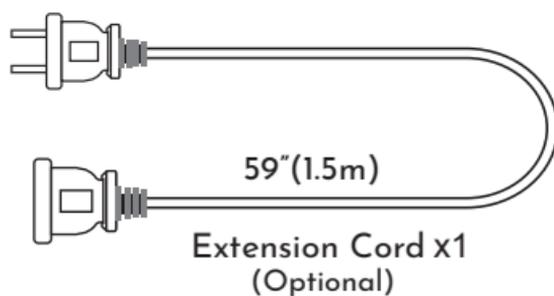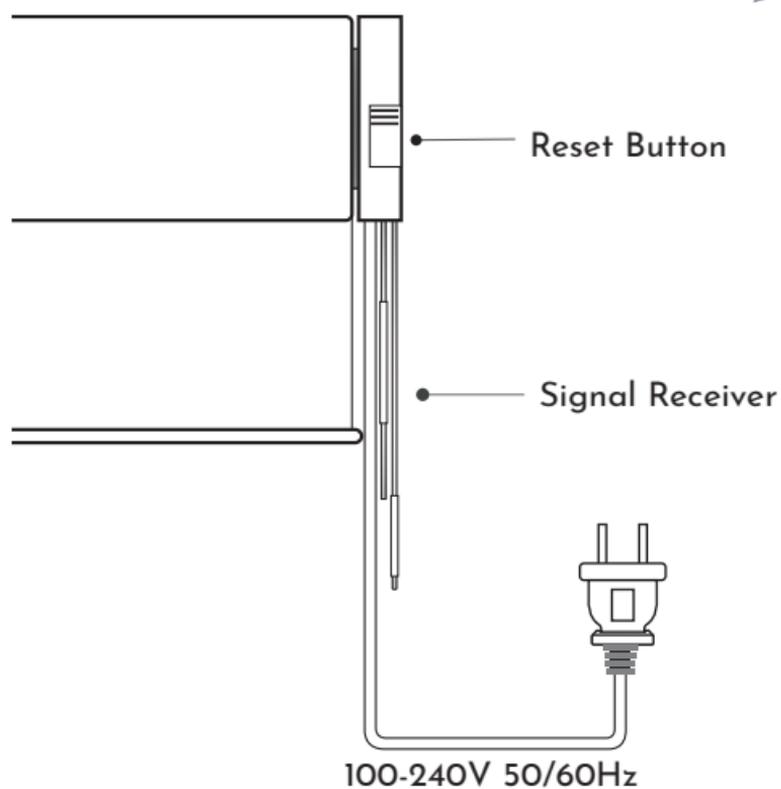

A-2 AEOLUS® REMOTE CONTROL



Wall Holder



S x2

INSTALL THE BATTERY



Your blind has been programmed, please control it after installation.


1




2 Use a pen to pry the back cover of the remote.



Slightly press the back cover to prevent it from popping out.

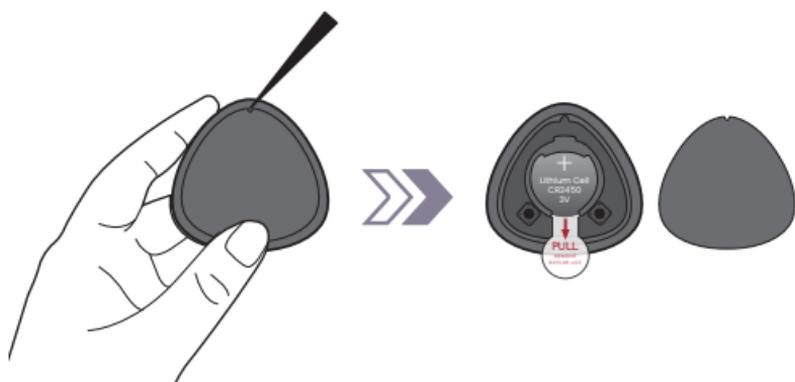


3 Remove the insulating sheet.

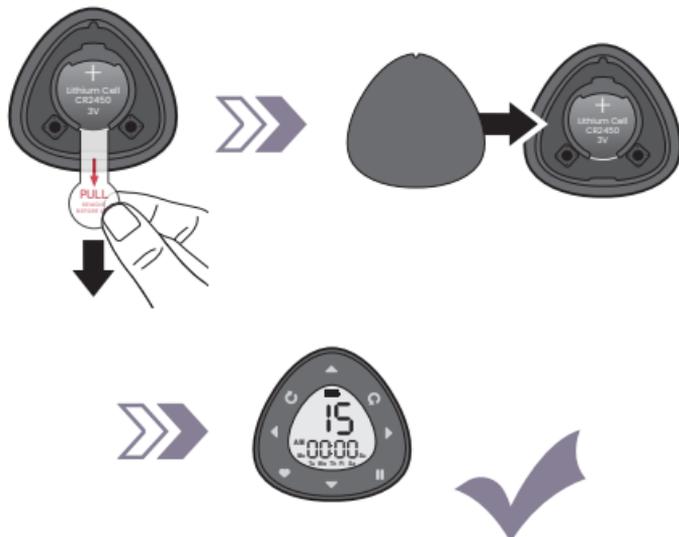


PARAMETERS


FRONT

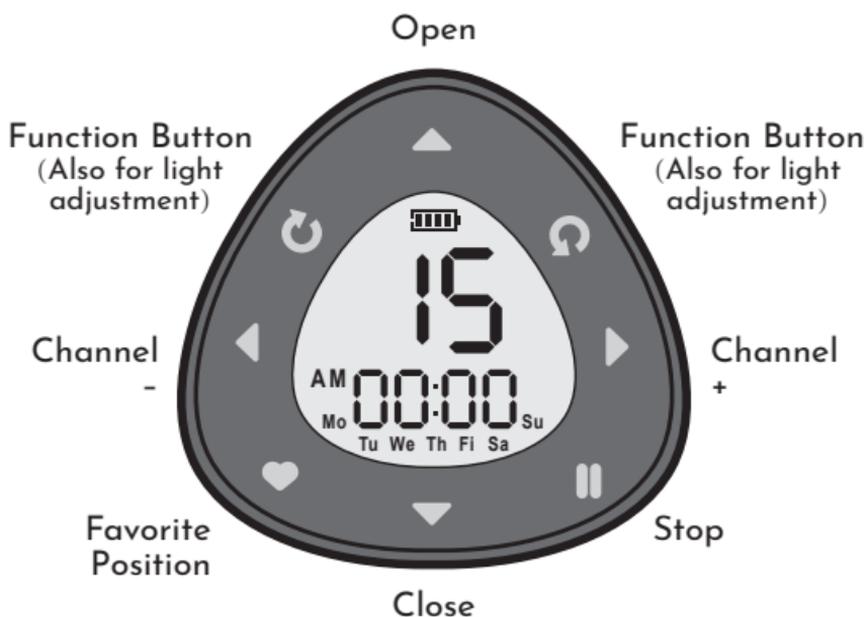

SCREEN

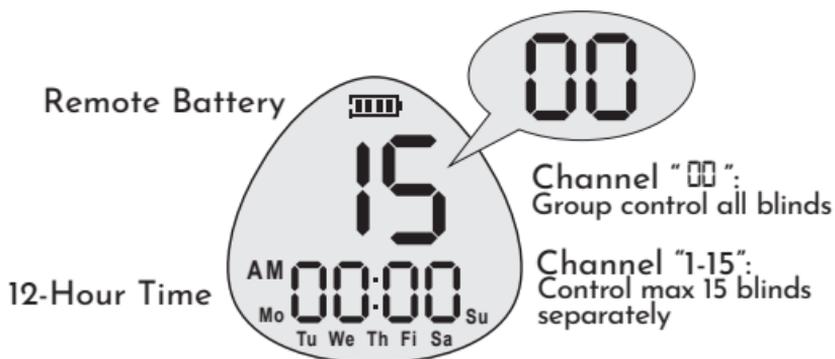

BACK

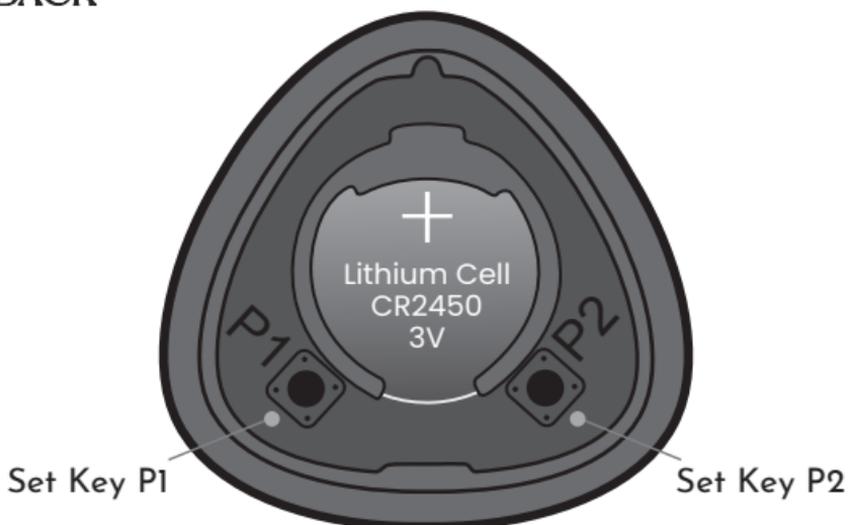

HAND HOLDER:




WALL HOLDER:




Method 1



Back

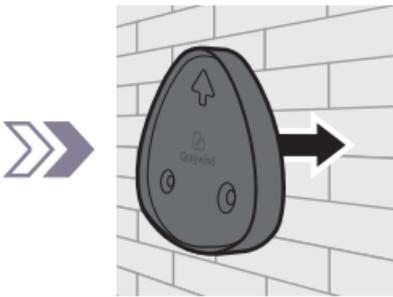

Method 2

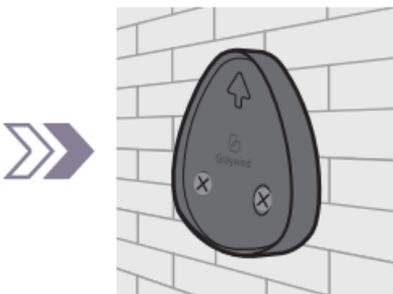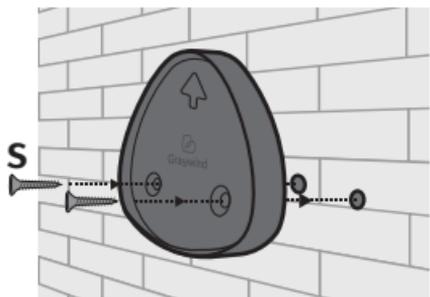







B. INSTALLATION

B-1 PREPARATION



* Drilling hole size 6mm
Recommended size of drill bit: 15/64"

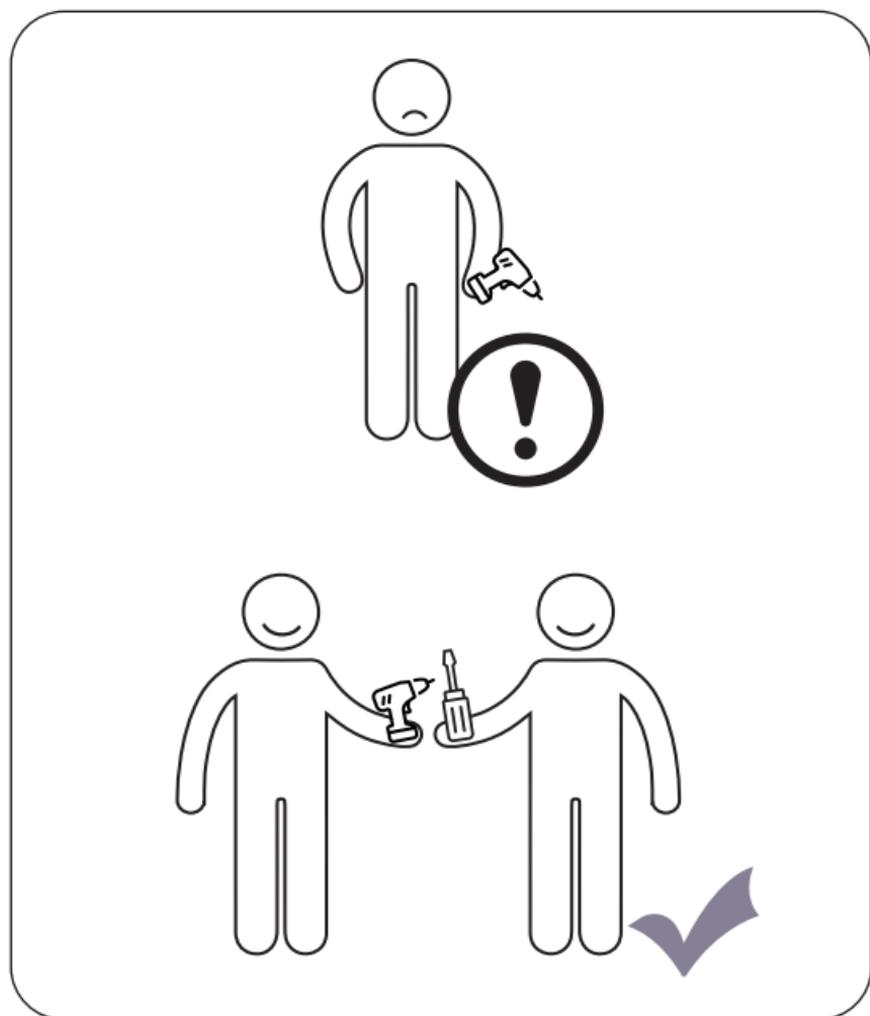

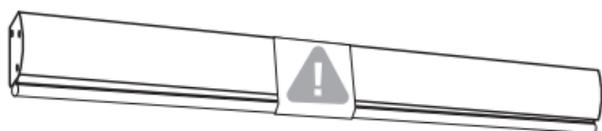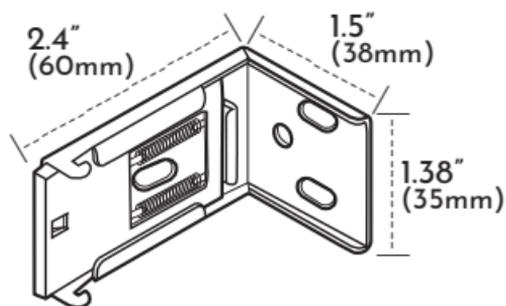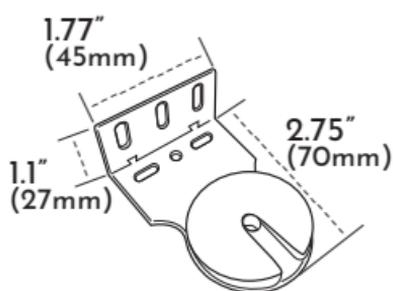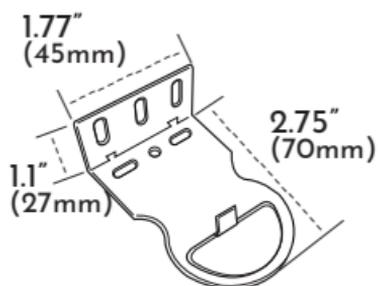B-2 ACCESSORIES**WITH VALANCE****v****b xn****f xn****NO VALANCE****v****b₁ x1**

Motor Side


b₂ x1**f xn**

B-3 INSTALLATION OF BLIND WITH VALANCE WITH VALANCE


INSIDE MOUNT






- 1 Mark punch positions.

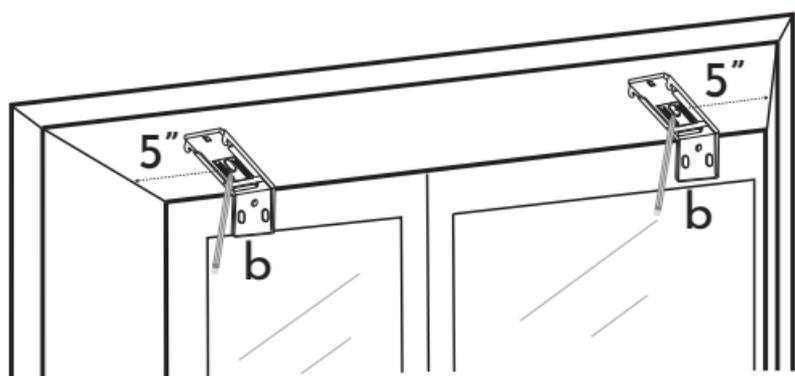

- 2 Drill holes & install mounting brackets.

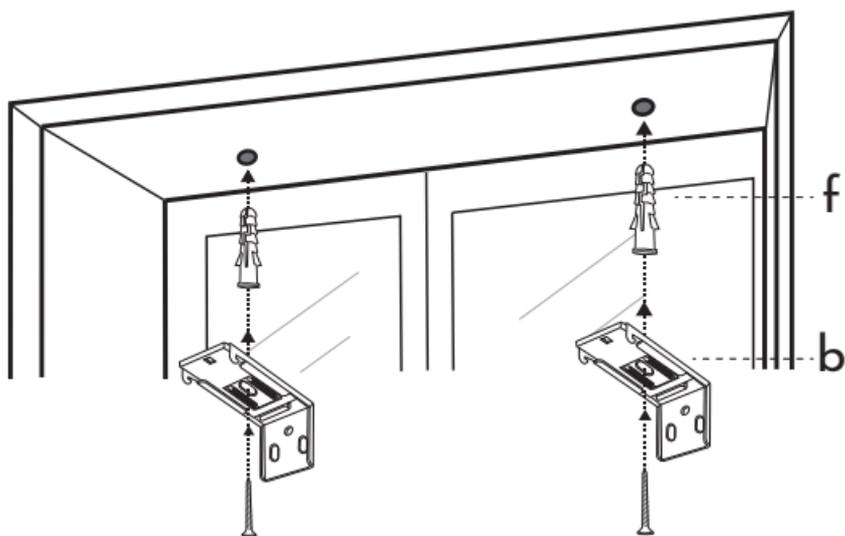


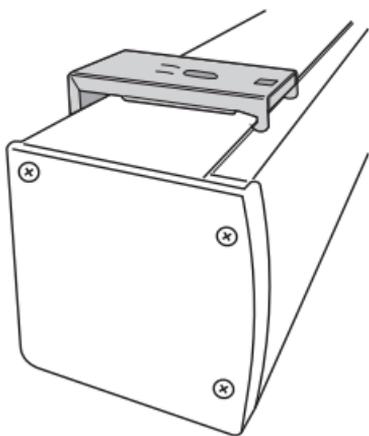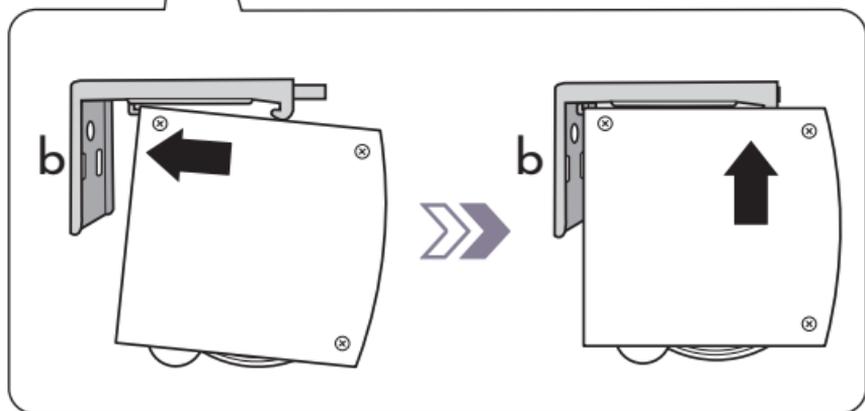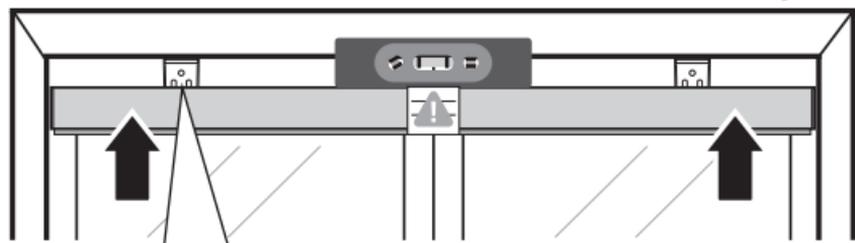3 Install the blind.**4** Remove paper seal.**5**


Your blind has been programmed,
please use directly.




OUTSIDE MOUNT

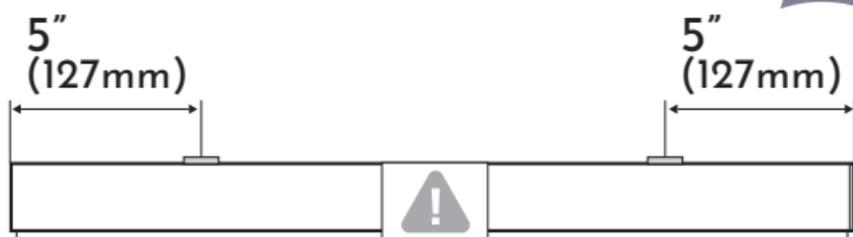


- 1 Clamp mounting brackets on the valance.

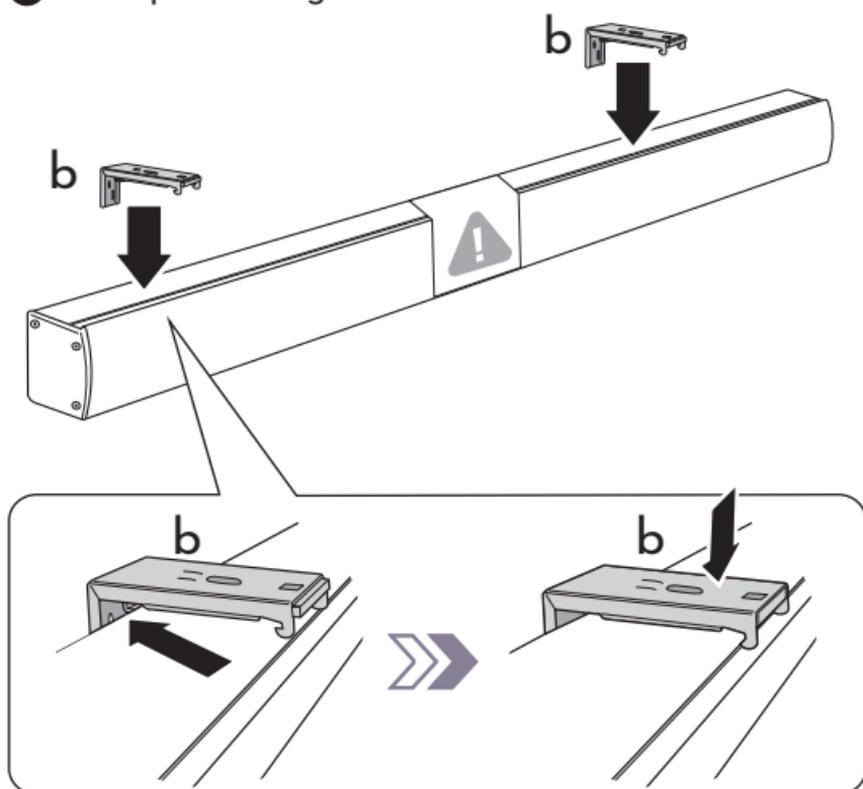


- 2 Mark bracket positions.

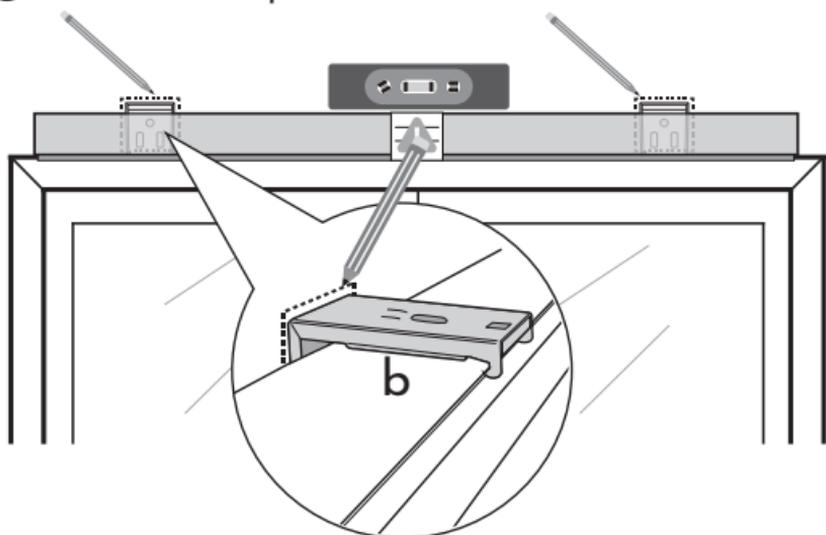


3 Take down mounting brackets.



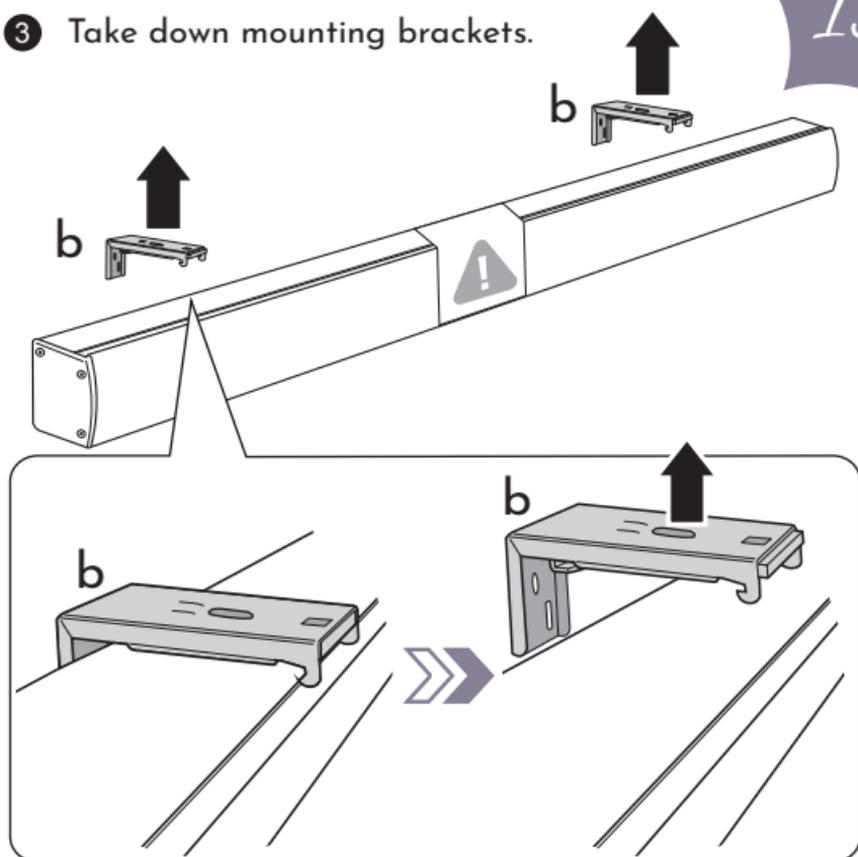


4 Mark punch positions.

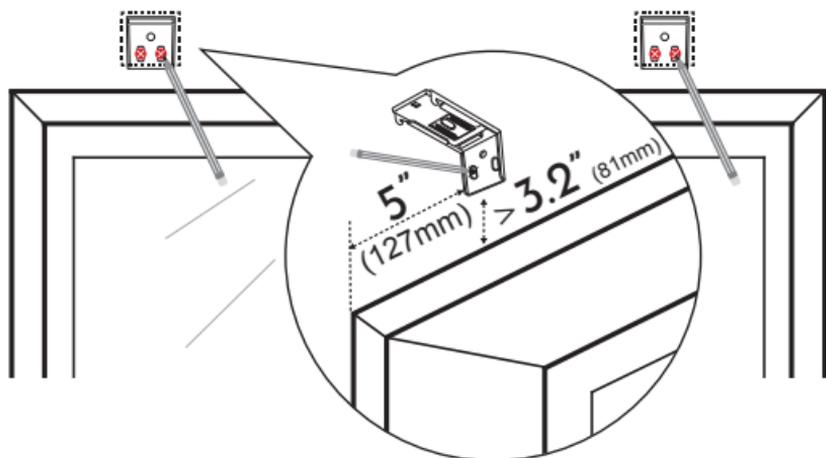

5 Drill holes & install mounting brackets.

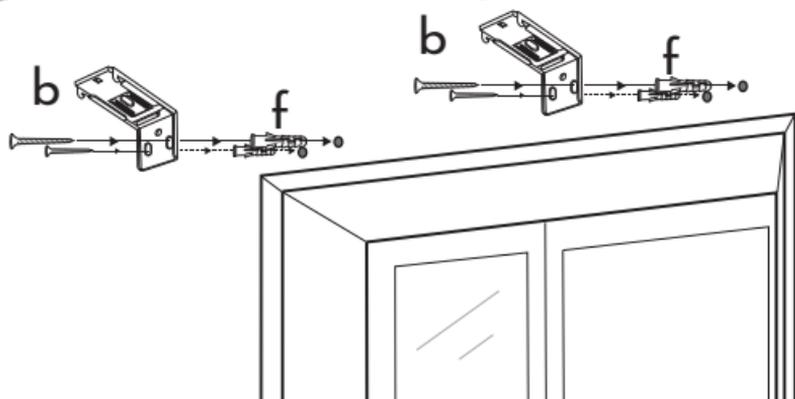

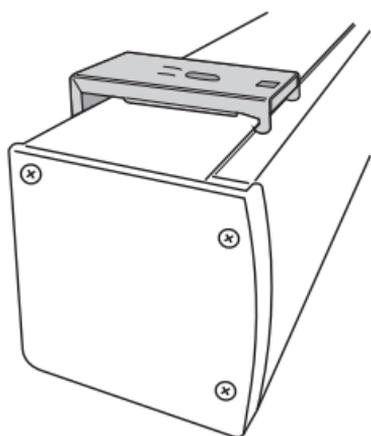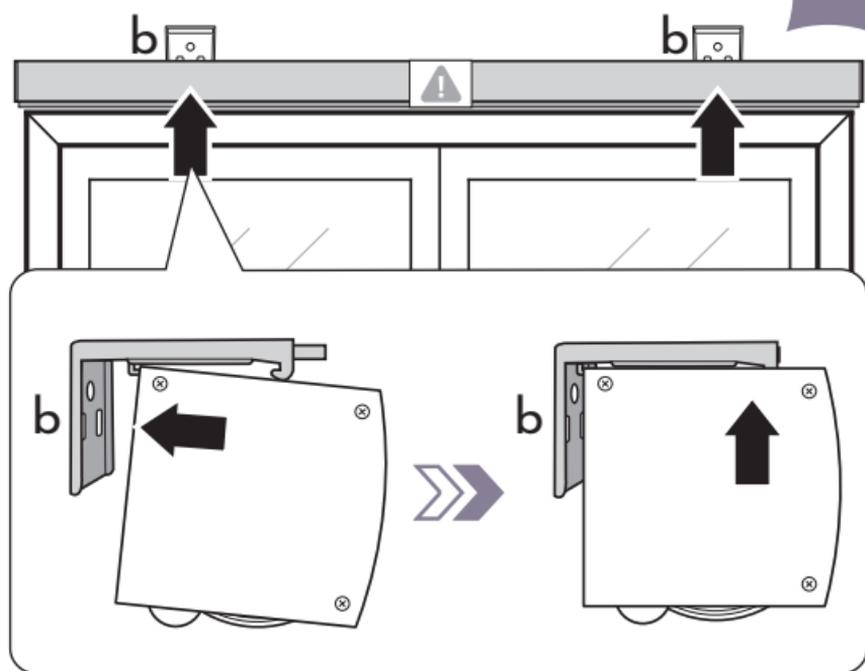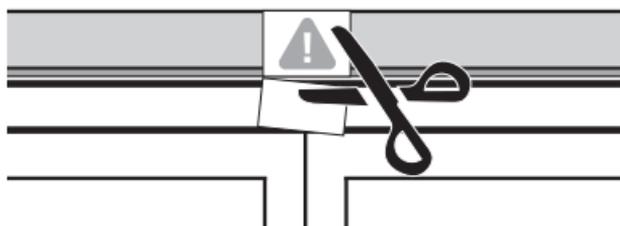6 Install the blind.**7** Remove paper seal.**8**


Your blind has been programmed,
please use directly.




B-4 INSTALLATION OF BLIND WITHOUT VALANCE

INSIDE MOUNT


- 1 Mark punch positions.

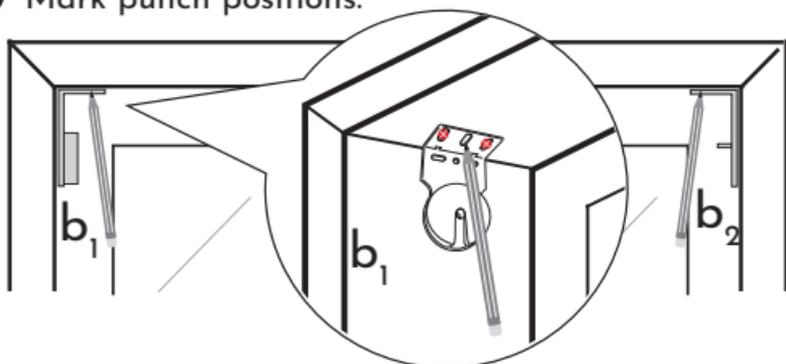


- 2 Drill holes & install mounting brackets.

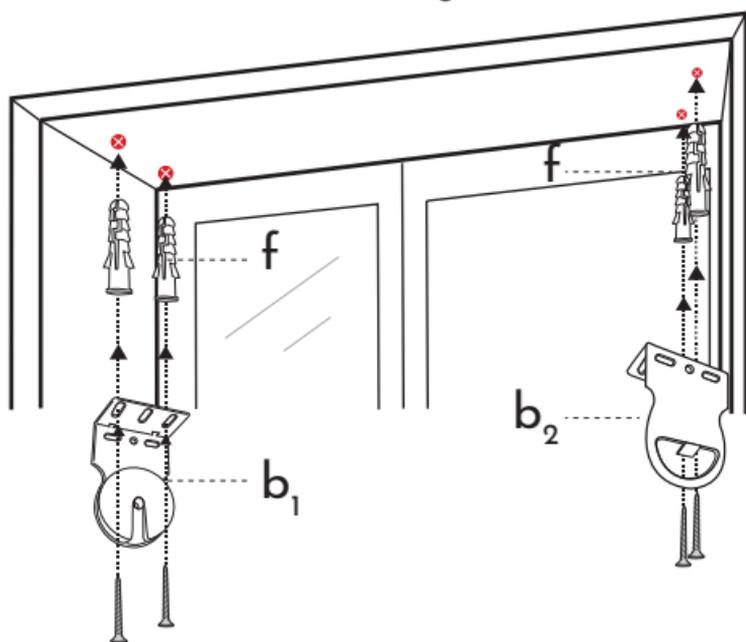


- 3 Install the side where the motor is located.

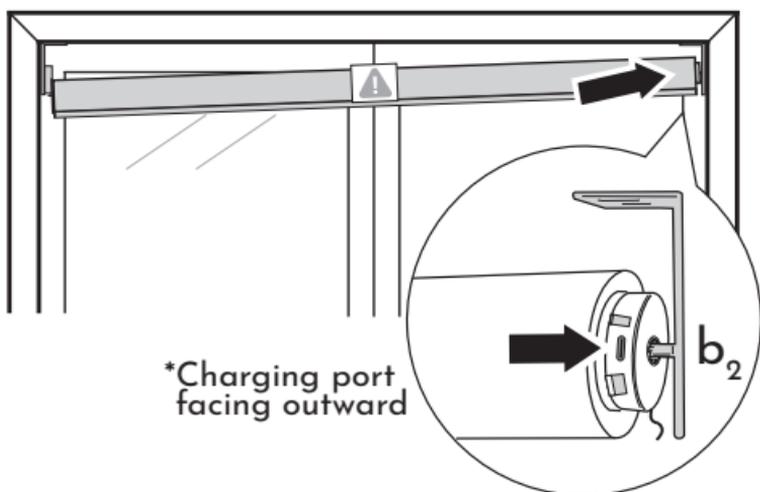

- 4 Install the other side.

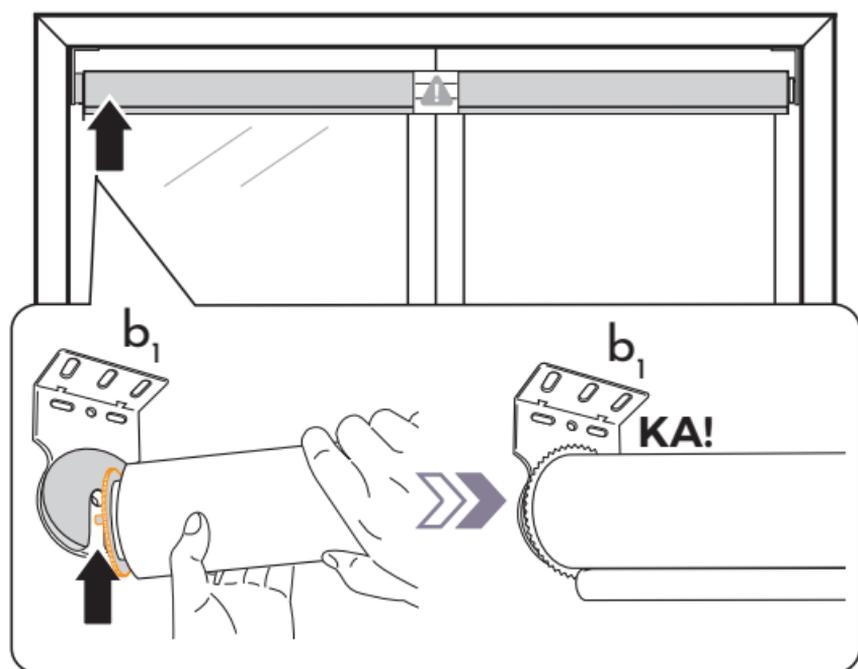

- 5 Remove paper seal.

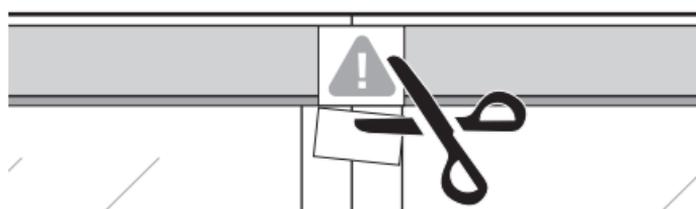

- 6



Your blind has been programmed,
please use directly.




OUTSIDE MOUNT

- 1 Put mounting brackets on both sides of the blind.




- 2 Mark bracket positions

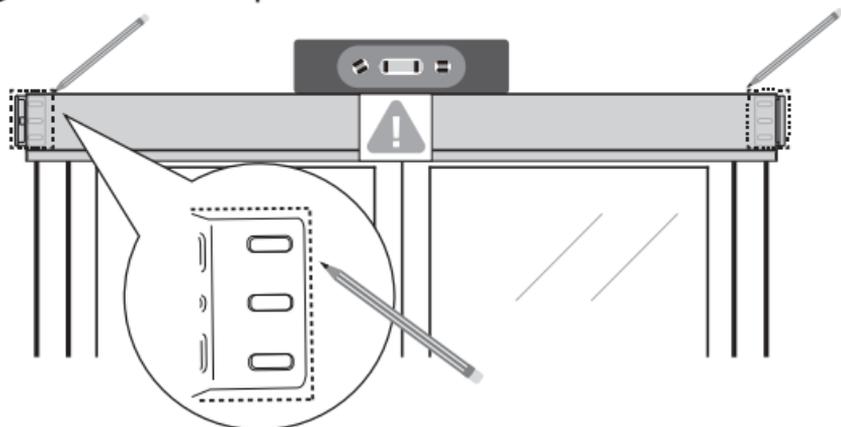


- 3 Remove mounting brackets.




- 4 Mark punch positions.

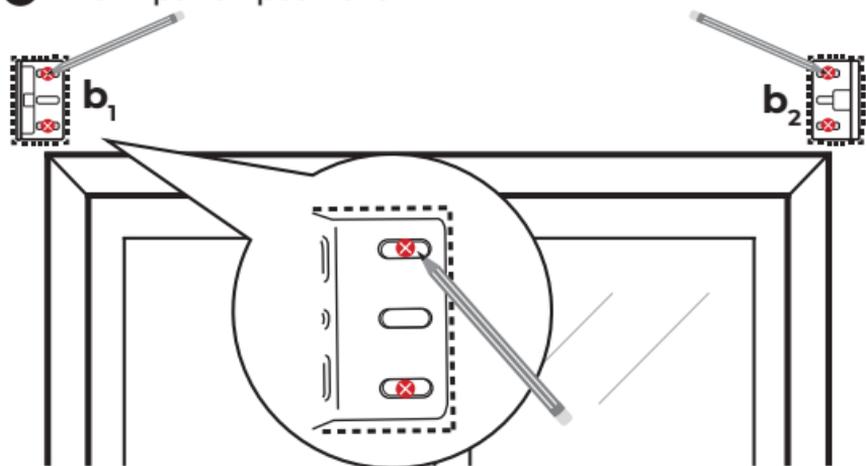


- 5 Drill holes & install mounting brackets.

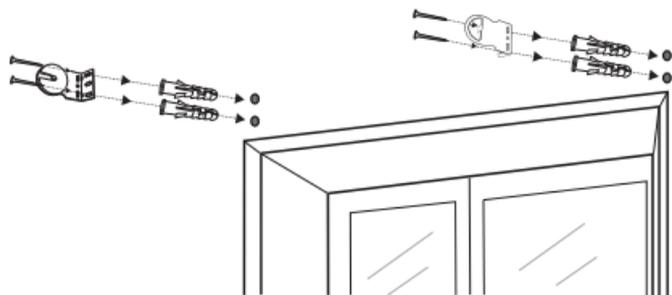


- 6 Install the side where the motor is located.

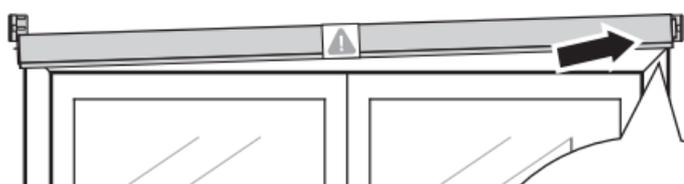


*Charging port facing outward

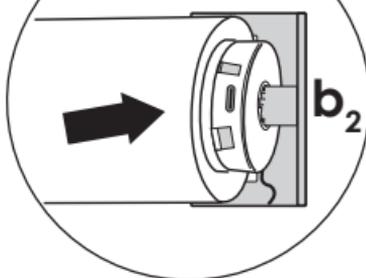


- 7 Install the other side.

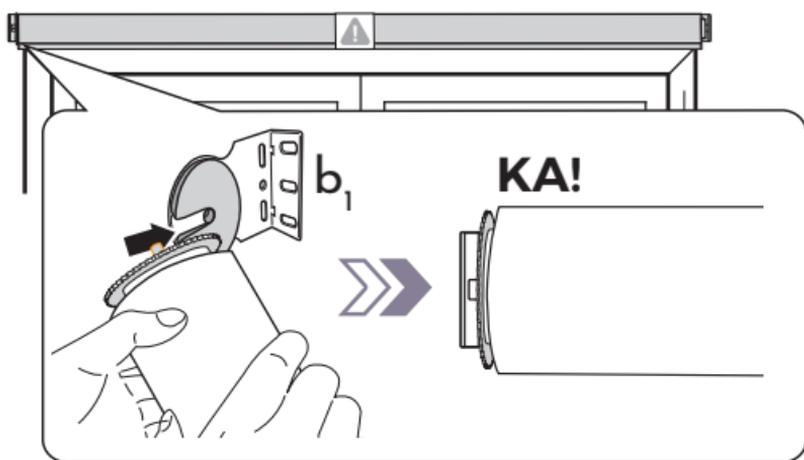

- 8 Remove paper seal.

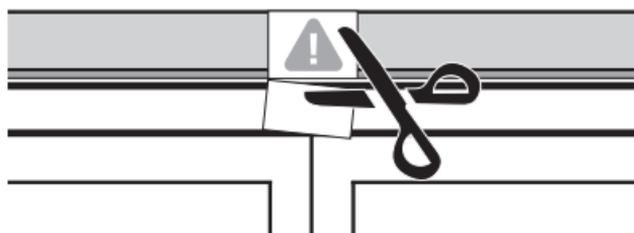


- 9


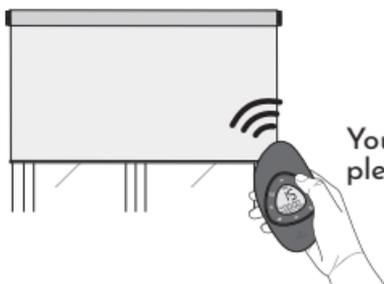


Your blind has been programmed,
please use directly.

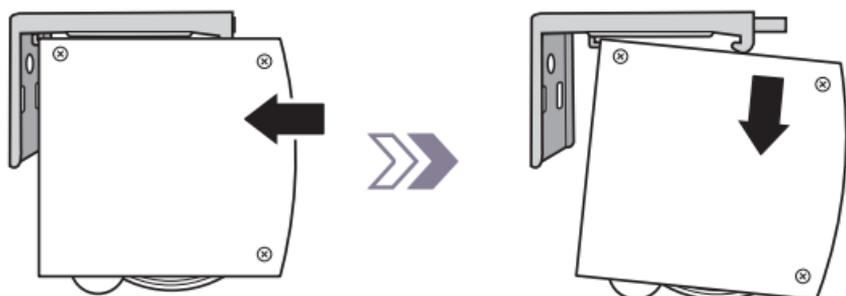


B-5 TAKE DOWN THE BLINDWITH VALANCE

*Push the blind inward

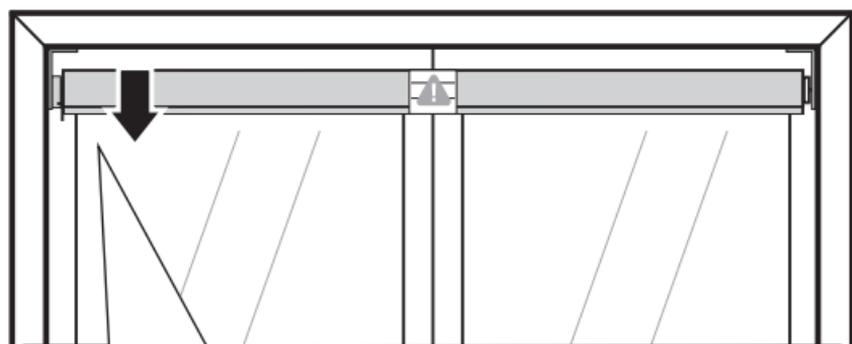NO VALANCE

Rotate the gear by 45° vigorously.

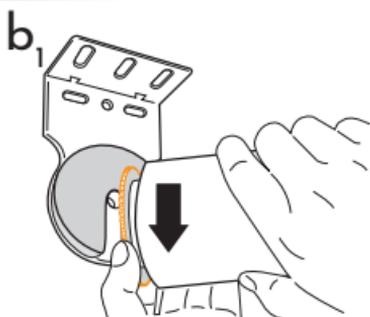

Keep rotating by 45° and take it out.



C. APP CONTROL

C-1 ZIGBEE BATTERY MOTOR



Please check if the top and bottom limits are already set before connecting to Alexa.

The 5 models of Alexa below can connect to blinds directly. But for other models, a Zigbee Hub is needed:



Echo Plus
(2.Gen.)



Echo
Studio



Echo
(4th Gen)



Echo Show 10
(3rd Gen)




Echo Show
(2nd Gen)


ALEXA CONNECTION

STEP 1


1

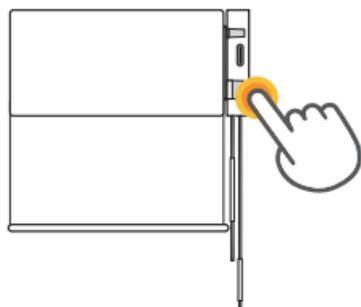

Hold for **6s**



Blind jogs **2x**



Release the reset button
and blue light flashing.

2



Please say
"Alexa, discover my devices"



"OK"







"I've found first device"



If Alexa doesn't reply "I've found first device", please enter in the page of "All devices" in Alexa app to check if it has already been connected successfully.

STEP 2 SET DEVICE NAME

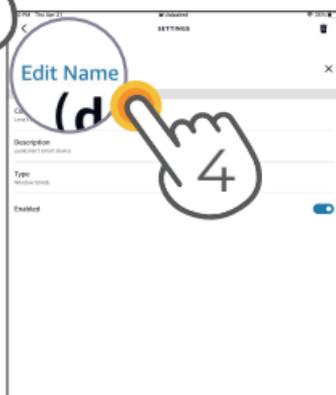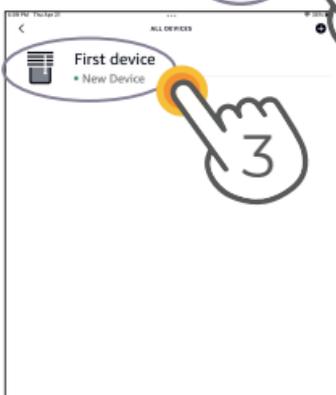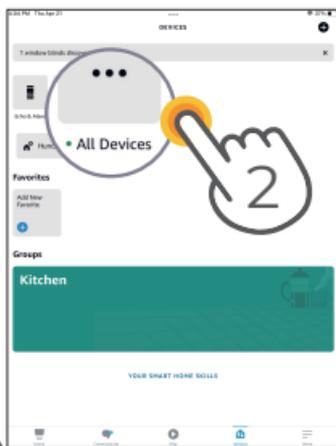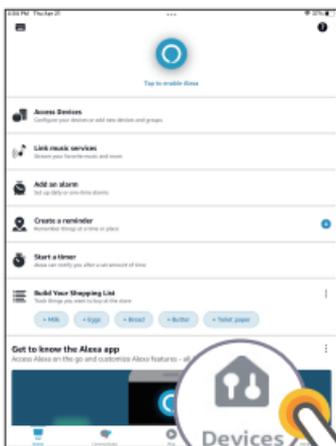

VOICE CONTROL



Please say

Alexa, open/close (device name).

Alexa, open/close (device name) to 1~100%.



If you use the echo4,
please refer to the
instructions below:



Echo (4th Gen)



Please say

Alexa, open/close (device name).





Alexa, open/close (device name) to 1~100%.









For different echos and firmware versions,
voice commands are various.
Please try with different commands.


STEP 3

CONTROL THE BLIND VIA ALEXA ROUTINE

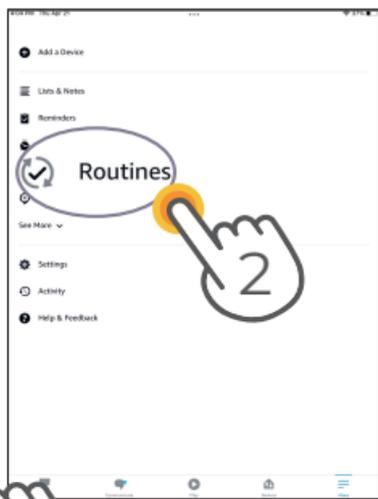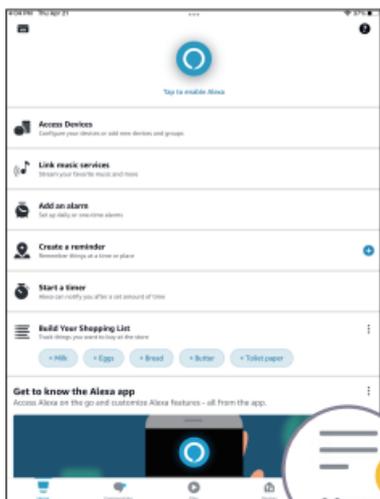

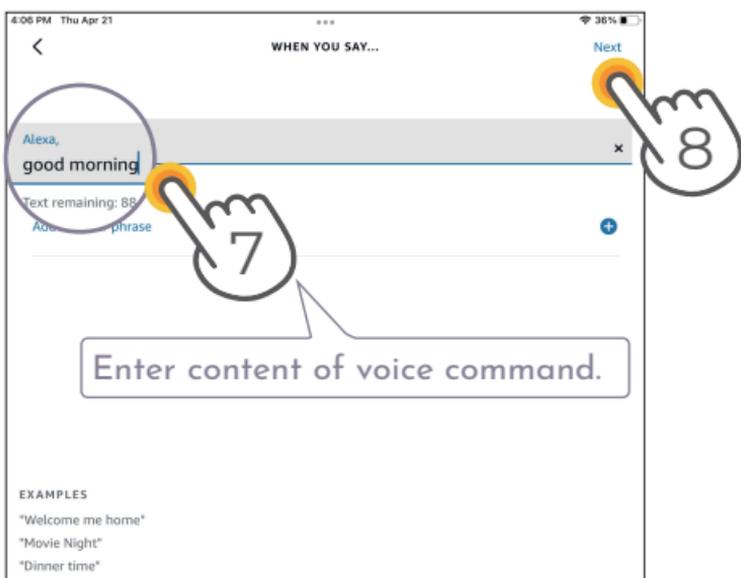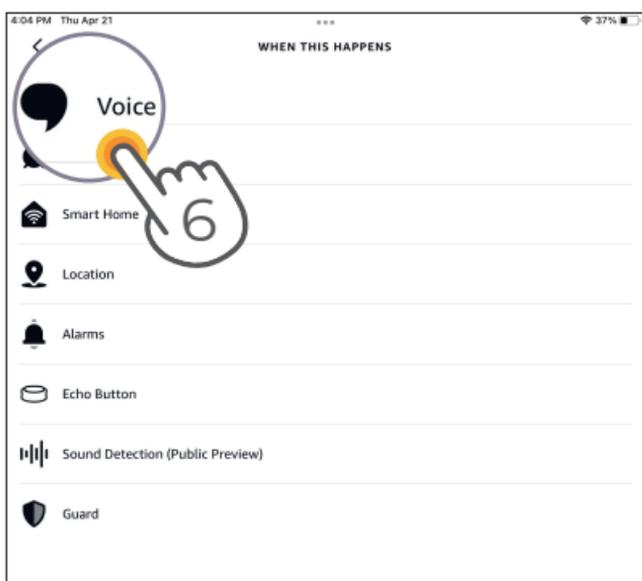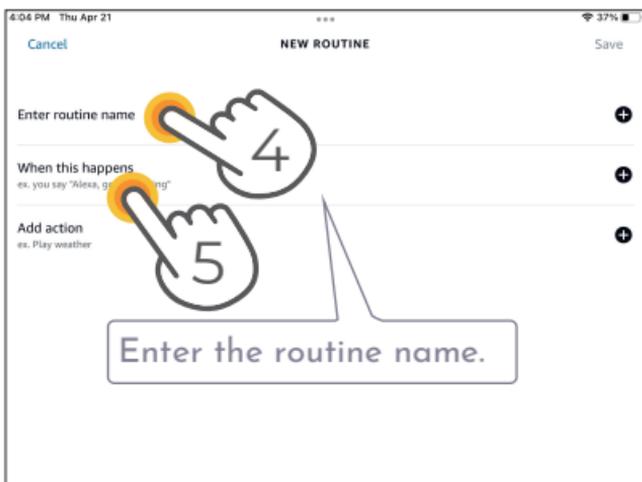

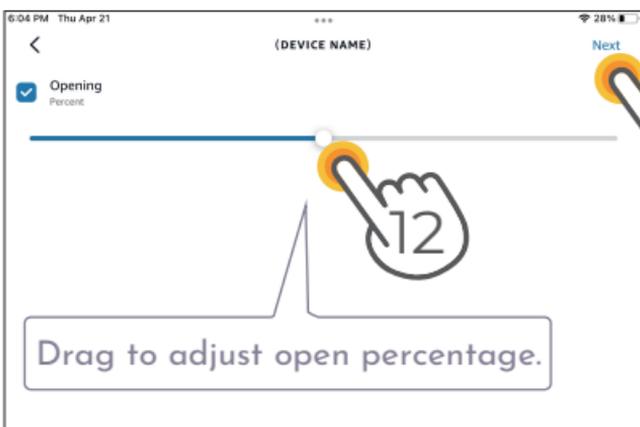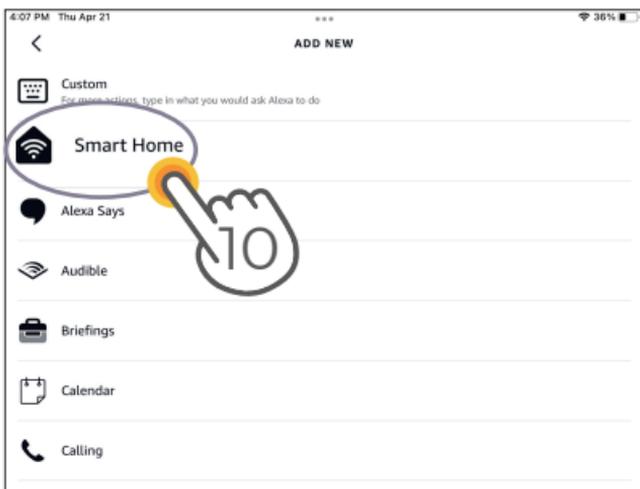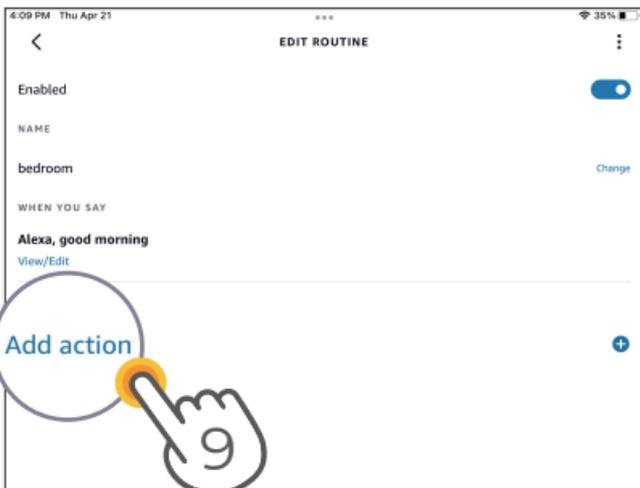

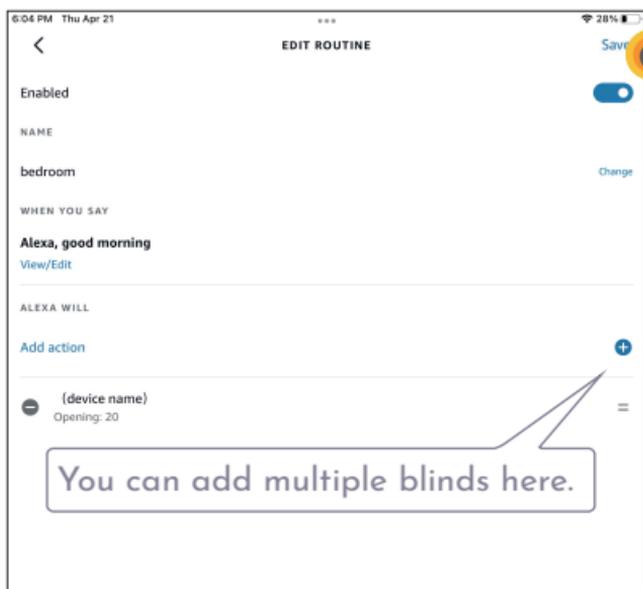


In order to control (device name) better,
You can set up multiple routines based on
different usage scenario, such as fully open,
fully closed, half-open etc.



Congratulations!
Now you can free control the blind via Alexa routine!

TIPS FOR SHANGRI-LA BLINDS

- You can rotate the slats of Shangri-la Blinds via voice commands. With the same voice command, the angles of slats may be different because of the height of blinds.
- You can try with different commands to adjust the slat angles of Shangri-la blinds, such as "Alexa, open (device name) to 95%-100%".

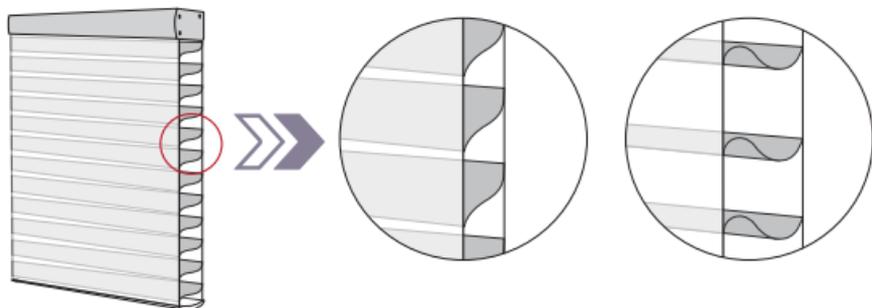

C-2 BLUETOOTH BATTERY MOTOR

- 1 Download & Open "Graywind" APP




Graywind Home



- 2 Sign Up/ Log in

- 3 Click "Add Device" on home page, press "BLE Shades/Blinds", then follow steps.

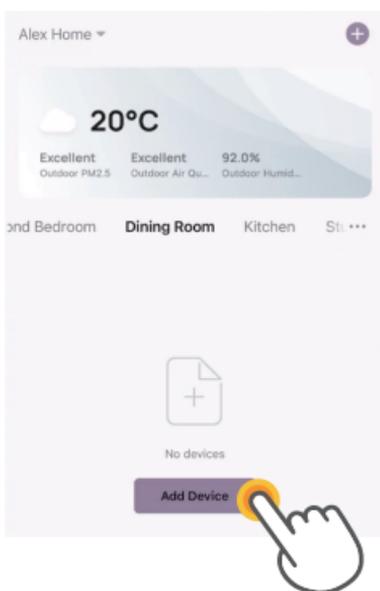


- 4 Please scan the QR code for specific operations.

PDF Version & Video Guide:



For more functions like timing, long-range control etc, or Alexa/Google Home control, you need to buy BLE hub separately. For details, please contact customer service.



BLE Hub



Alexa

or



Google Home

C-3 WIFI HARDWIRED MOTOR


- 1 Download & Open "Graywind" APP



Graywind Home



- 2 Sign Up/ Log in
- 3 Click "Add Device" on home page, press "AC32 Shades/Blinds", then follow steps.

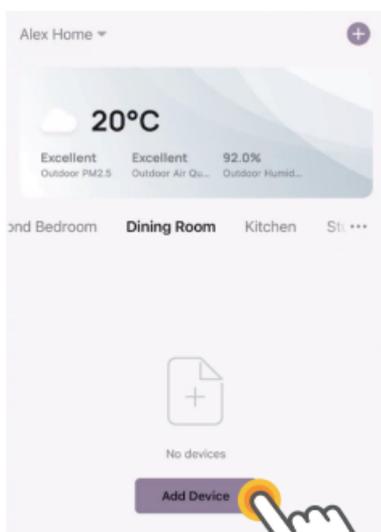

- 4 Please scan the QR code for specific operations.

PDF Version & Video Guide:





D. REMOTE CONTROL PROGRAMMING

D-1 SLEEP MODE



Please skip this step for wifi hardwired motor.

WAKE UP:


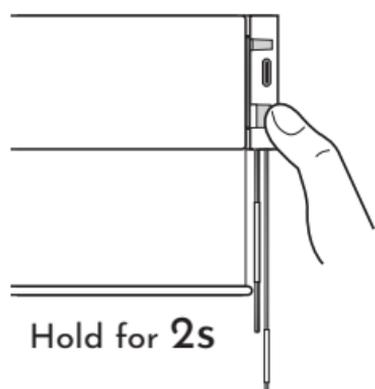


Blind jogs 1x





ENTER IN SLEEP MODE:

1

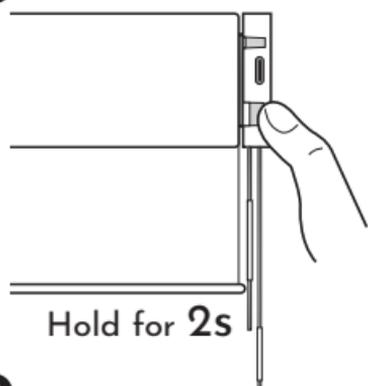

Blind jogs 1x

2

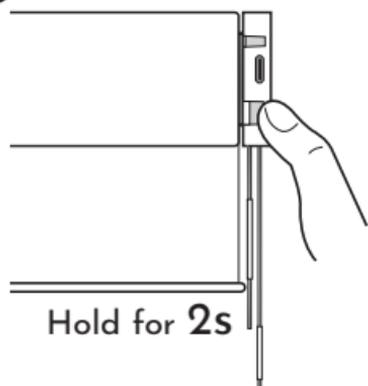



Blind jogs 1x



CHECK:**UNDER NORMAL OPERATION MODE**



The top and bottom limit positions are already set.

1


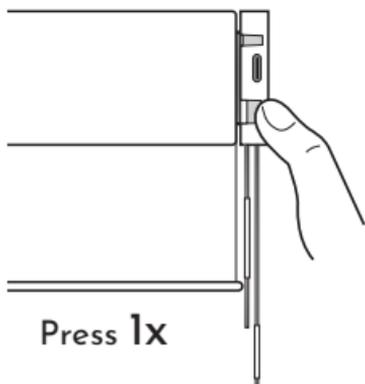


Move up or down

2

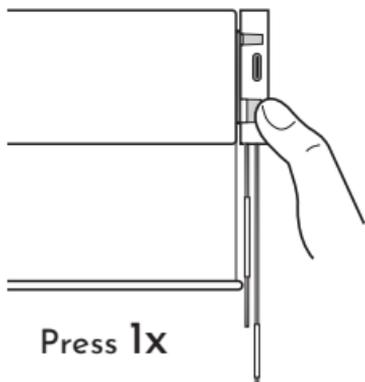

Stop

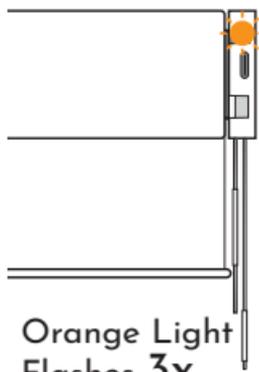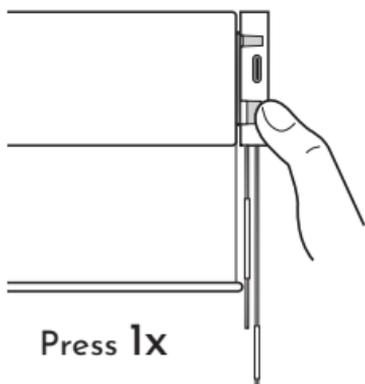UNDER SLEEP MODE

D-2 ENTER SETTING MODE


1. It will exit setting mode if pressing "◀" or "▶".
2. It will exit setting mode if there is no operation for 3 mins.

1



Press "◀" or "▶",
choose the channel you
want to set from "1-15"

2



Hold "P1" for 5s




Channel flashes, enter setting mode.

D-3 CLOCK SETTING



Please ensure the remote is in setting mode before doing steps below:

1




Hold " P2 " for 5s



"Hour" icon flashes

2

Adjust time, weeks

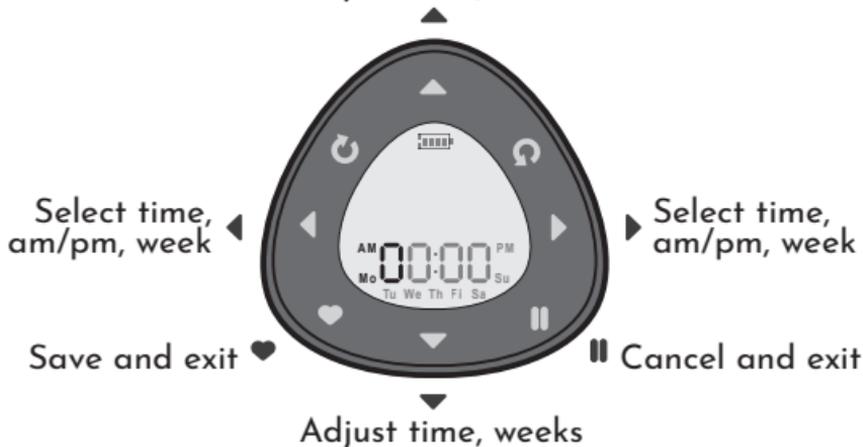

D-4 TIMING SETTING

SET:



1. You can set at most 20 groups of timing for each remote.
2. Please ensure the remote is not in setting mode before setting timing. If it's in setting mode, please refer to page 30 to exit setting mode.

1 Enter timing setting.



Hold "♥" & "||" for 3s

2 Add new timing.



3 Set Time.



Press "◀" or "▶" to switch between hr and min, the selected part will be flashing.

Press "▲" or "▼" to select the numbers.

4 Set AM/PM.



Press "▶" and enter into AM/PM selection.
Press "◀" or "▶" to choose.

Press "▲" to save and "⊖" icon will show up.
Press "▼" to cancel and "⊖" icon will disappear.

5 Set the day of the week (Multi-choice).



Press "◀" or "▶" to select the day of the week. The selected one will be flashing.

Press "▲" to save and "⊕" icon will show up. Press "▼" to cancel and "⊕" icon will disappear.


6 Set action of the blind.



Press "◀" or "▶" to switch between open and close, the selected one will be flashing.

Press "▲" to save and "⊕" icon will show up. Press "▼" to cancel and "⊕" icon will disappear.

7 Set channels (Multi-choice).

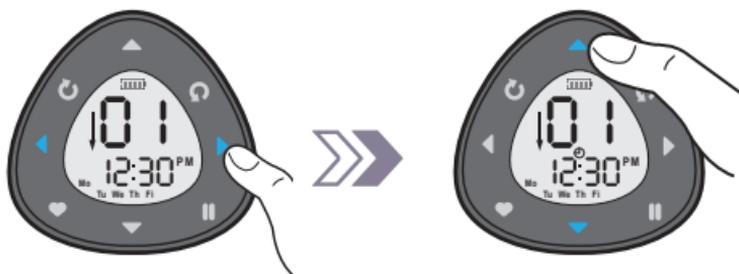

Press "◀" or "▶" to select the channel number. The selected one will be flashing.

Press "▲" to save and "⊕" icon will show up. Press "▼" to cancel and "⊕" icon will disappear.

8



Press "♥" to save the setting.

9



Press "||" to exit timing setting.



DOUBLE CHECK:

1 Enter timing setting.



Hold "♥" & "||" for 3s

2 Confirm timing group.



Press "◀" or "▶" to select the group of timing.


3 Confirm channels in the group.



Press "▲" or "▼" to check the channels in the group.

MODIFY:

- 1 Enter timing setting.

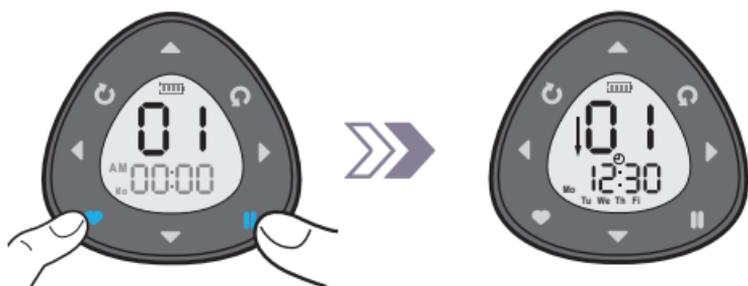

Hold "♥" & "||" for 3s

- 2 Select timing group.



Press "◀" or "▶" to select the group of timing.

- 3 Modify timing group.



Hold "☰" to enter in the group of timing and modify.



1. The way to modify can be referred by step 3-9 in D-4(P32-P34).
2. When you modify the time, please note: 00:00 means delete this timing group.


D-5 MOTOR PROGRAMMING

SET FAVORITE POSITION



1. The favorite position is not set at factory.
2. Before setting the favorite running position, please make sure the top and bottom limit positions are already set.
3. Please ensure the remote is in setting mode before doing steps below:


- 1 Run the blind to favorite position you want to set (except fully open and fully closed)

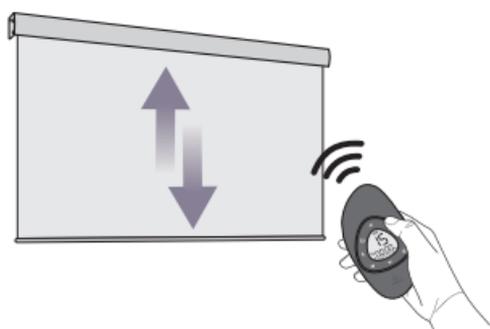

2



Press "♥" & "||"




Blind jogs 2X



DELETE FAVORITE POSITION



Press "♥" & "||"



Blind jogs 1X



HOW TO CHANGE UP/DOWN DIRECTION


Method 1



Please ensure the remote is in setting mode before doing steps below:




Press "▼" & "⏻"




Blind jogs 1x



Method 2

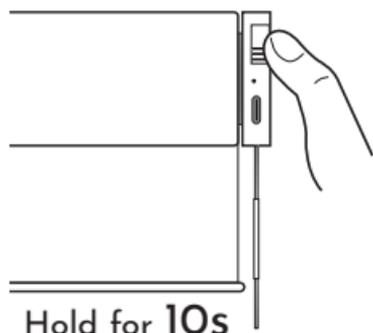

Hold for 10s



Blind jogs 3x



HOW TO ADJUST RUNNING SPEED OF BLIND




Please ensure the remote is in setting mode before doing steps below:

Speed up



Press "  " & "  "




Blind jogs 1x



Slow down



Press "  " & "  "



Blind jogs 1x




If motor doesn't jog, the max/min speed has already been reached.
There are 3 kinds of speed available.

DELETE TOP LIMIT POSITION

Please ensure the remote is in setting mode before doing steps below:



Press " ♥ " & " ▲ "




Blind jogs 1x

DELETE BOTTOM LIMIT POSITION

Please ensure the remote is in setting mode before doing steps below:



Press " ♥ " & " ▼ "




Blind jogs 1x

DELETE TOP & BOTTOM LIMIT POSITION

1. The favorite position will also be deleted.
2. Please ensure the remote is in setting mode before doing steps below:



Press " ▲ " & " ▼ "



Blind jogs 1x




SET TOP LIMIT POSITIONS



Please ensure the remote is in setting mode before doing steps below:

1




Run the blind to top limit position you want to set.

2



Press " ♥ " & " ▲ "




Blind jogs 2X

SET BOTTOM LIMIT POSITIONS



Please ensure the remote is in setting mode before doing steps below:

1




Run the blind to bottom limit position you want to set.

2



Press " ♥ " & " ▼ "



Blind jogs 2X




UNPAIR THE MOTOR



1. Please ensure the remote is in setting mode before doing steps below:
2. After doing this, all paired remotes will lose connection with the motor.




Press "▲" & "||"




Blind jogs 1X



RESET THE MOTOR

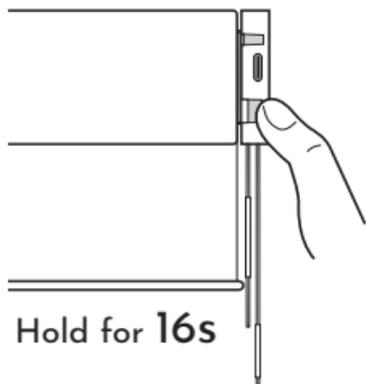

Hold for 16s



Blind jogs 4X



Zigbee & Bluetooth Battery Motor will enter in sleep mode after being reset.
Please unlock before repairing.




RE-PAIR THE MOTOR




Please ensure the remote is in setting mode before doing steps below:

1

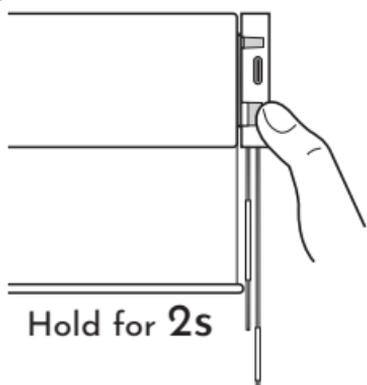


Hold for 2s



Blind jogs 1x


2



Press "P2" 1x




"H1" shows on the screen



Blind jogs 2x

3



Press "P1"



"AA" shows on the screen




ADD NEW REMOTE "B"


Please ensure the remote is in setting mode before doing steps below:

1 Paired remote "A"


Press "Q" & "II"




Blind jogs 1x

2 Unpaired remote "B"


Press "◀" or "▶",
choose the channel number.

3 "B" Enter setting mode, refer to Page 30.**4**

Press "P2" 1x



"H1" shows on the screen

5

Press "P1"



"AA" shows on the screen



🔗 ENGLISH VERSION |

Please scan the QR code below to get the PDF manual in English.

🔗 GERMAN VERSION |

Bitte scannen Sie den untenstehenden QR-Code, um die PDF-Broschüre auf Deutsch zu erhalten.

🔗 JAPANESE VERSION |

以下のQRコードをスキャンして、日本語のPDFマニュアルを入手してください。

