


M600 Gaming Mouse User Manual

Thank you for choosing the KYSONA mouse, please read this manual before using it for the best experience.

Package Content

M600 Gaming MouseX1
User ManualX1
USB ReceiverX1
Type-C CableX1

Product Function Keys

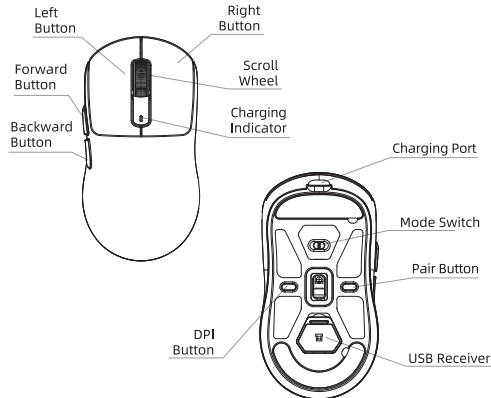


Mouse Parameter

Name: M600
Type: Wireless Gaming Mouse

Dimensions & weight

Product Dimensions: 118*62*40mm
Product Net Weight: 55g



DPI/Polling Rate

DPI: 50-26000 DPI
Polling Rate: 125/250/500/1000 Hz(default)

Solution

Sensor: PAW3395

Charging

Interface Type: Type-C
Capacity: 500mAh

LOD Setting

LOD Gear: 1mm/2mm(default)

Programmable Button

Number: 6

Cable

Type: paracord
Cable Length: 1.6m

Connection

Connection Way: Wired/2.4G/BT
Effective Connection Distance: 10M

System Support

Windows 8/10/11/Mac OS

Set-up Guide

2.4G Mode (Wireless Gaming)

- Slide the mode switch to "2.4G." The indicator light will turn red.
- Press and hold the pair button for 3 seconds to enter pairing mode. The indicator light will flash rapidly.
- Take the USB dongle from the hidden slot and insert it into the USB port of your device.
- The mouse will automatically pair with your computer, and the indicator light will turn off.

Wired Mode

- Slide the mode switch to "Off". The mode indicator light will turn off.
- Connect the mouse to your computer using the provided cable, plug and play.

BT Mode

- Slide the Mode Switch to "BT." Press the pair button to select the BT channel. The mode indicator light will turn green for BT 5.2 channel or blue for BT 5.4 channel.
- Press and hold the pair button for 3 seconds to enter pairing mode. The indicator light will flash rapidly.
- Go to the BT settings of your device and find "M600-5.2" or "M600-5.4" to pair and connect.
- If the connection was built up, the BT indicator light will automatically turn off.

DPI Switch

DPI	Color of DPI Indicator
800	Red
1600	Green
2400	Blue
3200	Cyan
5000	Yellow
24000	Purple

You can change your DPI with a press of the DPI cycle button at the bottom of the mouse.
The factory DPI settings are set at 800, 1600 (default), 2400, 3200, 5000, 26000, or you can fine-tune your own sensitivity setting using PC driver.

Customize M600 via PC Driver

Kysona driver allows for customization of button functions, macros, DPI, LOD, battery management, report rate, and other mouse settings

Driver Download and Install

Please download and install the driver from the KYSONA official website. Here is the link to download the driver:

- <https://support.kysona.com/m600>

Note

- Driver settings only support 2.4G and Wired mode, and cannot be used in BT mode (if the driver is opened in BT mode, it will prompt "device not recognized")
- The driver is only for PC, not for Mac

Battery Life and Sleep Mode

With a 500mAh rechargeable lithium battery, the mouse can last for up to 80 hours at a single charge under 1000Hz polling rate. And the battery can be fully charged in about 2 hours.

Moving the mouse wakes it up from Level 1 sleep mode (inactive for 1s to 35s) or Level 2 sleep mode (inactive for 35s to 10mins). Pressing a key wakes the mouse up from Level 3 sleep mode (inactive for more than 10 mins).

Compatibility

BT mode is compatible with MacOS, Windows 8, 10, and 11, but it is not supported on systems older than Windows 7.

Video Tutorial



<https://kysona.com/m600>