


INSTRUCTION MANUAL

LED Linear Strip-8FT

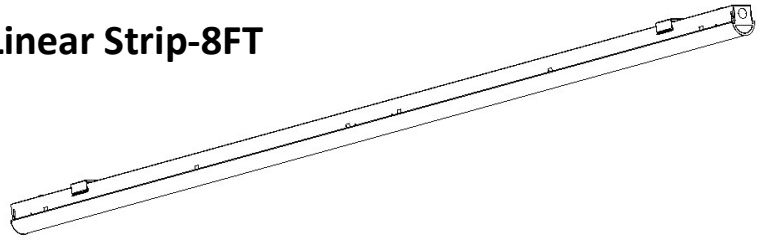

SAFETY INFORMATION


IMPORTANT: Read all safety precautions and installation instructions carefully before installing

- ◆ Do not install the fixture with power on, also do not operate by wet hands.
- ◆ Ensure the fixture is mounted onto a good structurally surface that will support the fixture.
- ◆ The fixture is designed for use in 120VAC, 60Hz.
- ◆ Product can be used in shops, supermarkets, Hospitals, airports, office buildings, government buildings etc.
- ◆ Do not install on radiant-heating type ceiling.


WARNING: IF NOT FOLLOW THESE INSTRUCTION MAY LEAD TO A POTENTIALLY FATAL ELECTRICAL SHOCK OR PROPERTY DAMAGE

PRE-INSTALLATION


HARDWARE INCLUDED



AA: large Pointed Pin Cross
Wood Screws*4PCS



BB: Wall Anchors*4PCS




CC: Wire Nut*3PCS




DD: Ceiling Hook*2PCS



EE: Hanging Chain*2PCS




FF: Buckle *2PCS




GG: Ceiling flush mounted sheet*2PCS

INSTALLATION (Suspended Mounting)


1. Based on the dimension as below, put the expansion screws (BB) into ceiling or wall. Fix the ceiling hook (DD) to the ceiling.

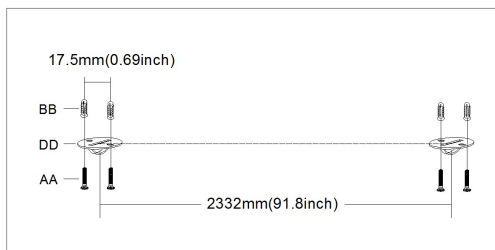


3. Connect AC wire.

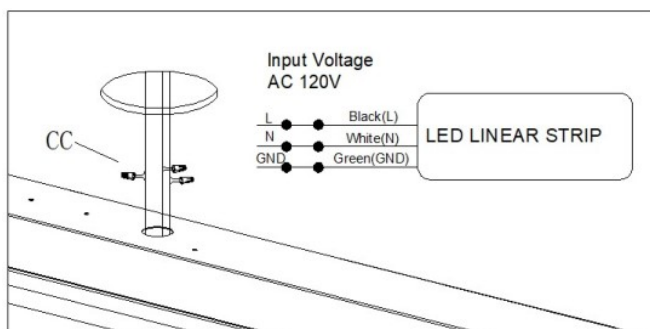

2. One end of the hanging chain (EE) fixed to the ceiling hook (DD) and the other end hung to the fixture (Part A). Adjust the hanging chain to make the two ends of fixture keep balance.

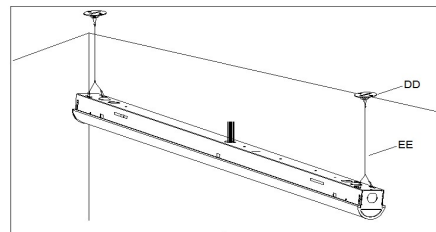


4. Lock the wiring pipe to the fixture, installation complete.

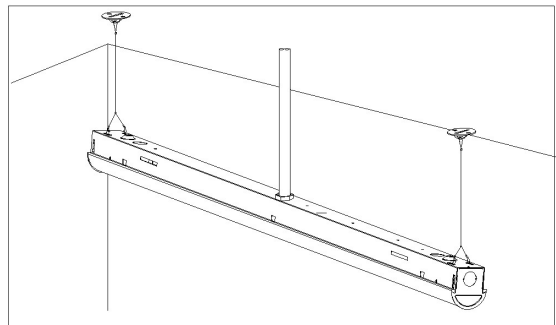


INSTALLATION (Flush Mounting)


1. Refer to the dimension of the lighting fixture, install the buckles (EE) to the ceiling.

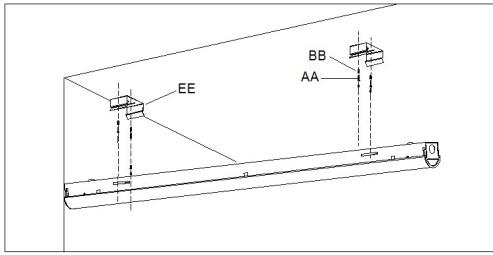


2. Lock the mounting plate.

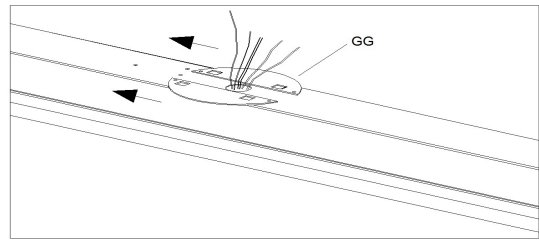

3. Connect AC wire .

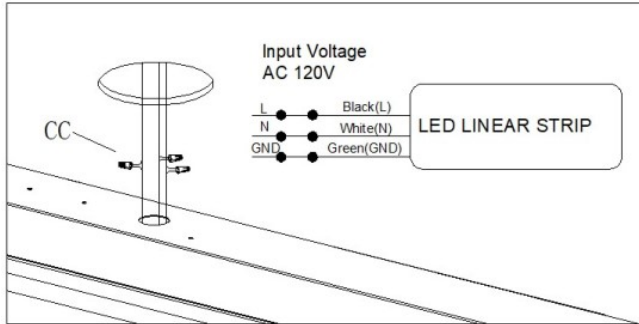


4. Pull up the light fixture to put it on the buckles.

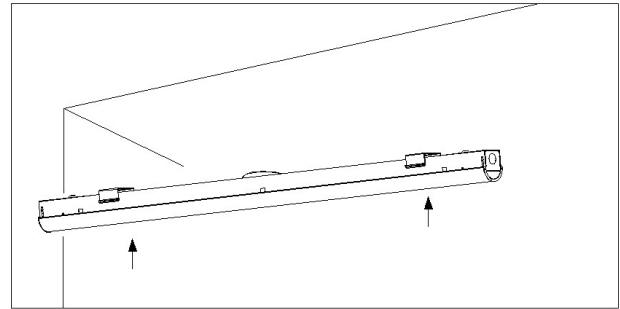


INSTALLATION (Linkable)



1. Knock off the knockouts at the end of the product.

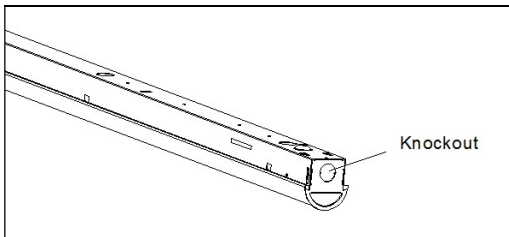


2. Take off the PC cover from the fixture.

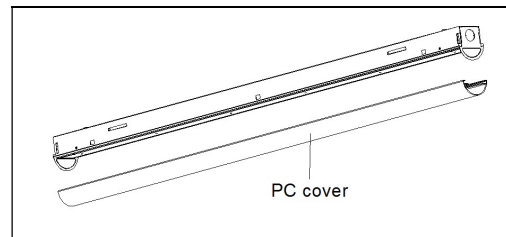


3. Following above installation to fix the fixture first and takes off the radiator from the fixture. (Safety rope to avoid the radiator falling down.) Connect all the wires inside the fixture, and extend the wires which need to be connected from the knockout.

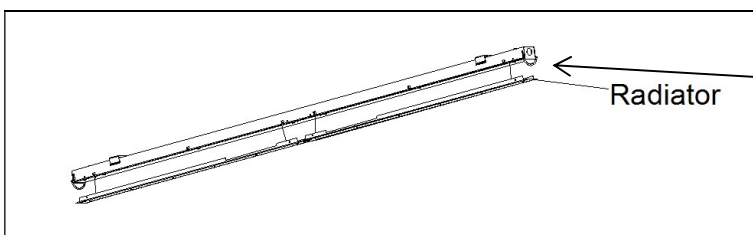

4. Reinstall the radiator and PC cover to the fixture after wiring connection.

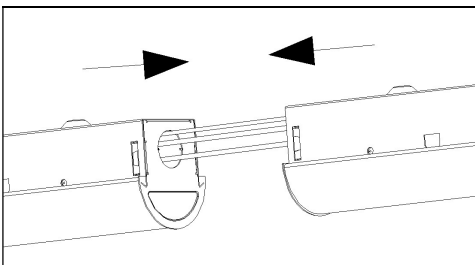

5. Linkable connection finish.

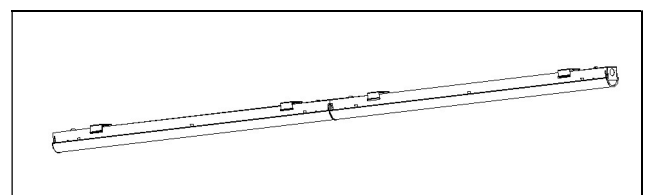

Guarantee

If your product does not arrive in good condition or does not work great 100% Satisfaction Guarantee within 3 years, please let us know we will give you replacement or refund. Customer service: Lightdot.cs@hotmail.com