

Metal ButtonΦ25

AP25A Series High Current Metal Button

GENERAL

1. Installation dimensions: Φ25mm.
2. Head shape: flat round、high round.
3. Wiring mode: pin terminal.
4. Operation: momentary,maintained.
5. Contact: 1NO1NC/2NO/1NO/1NC.
6. IP Degree: IP65
7. The material of Keypad: stainless steel,aluminum alloy plating.
8. The material of shell: stainless steel,aluminum alloy plating.
9. The material of base: PBT.

LAMP SPECIFICATIONS

Lamp type	Two-way LED lamp	
Rated voltage	AC/DC 3V	AC/DC 6V
	AC/DC 12V	AC/DC 24V
	AC/DC 36V	AC/DC 48V
	AC/DC 110V	AC/DC 220V
Lamp color	R ● G ● Y ● B ● W ○	
Life	≥40000h	





SWITCH RATING

Rated voltage(Ue)		12V	24V	110V	220V	
Rated current (Ie)	AC-15 50/60Hz	Resistive load	15A	15A	13A	13A
		Inductive load	10A	10A	8A	6A
	DC-13	Resistive load	6A	6A	2A	1A
		Inductive load	5A	5A	1A	0.5A


SPECIFICATION

Operating temperature	-25°C~ +55°C (Ice free)
Operating humidity	45-85%RH
Contact resistance	≤50mΩ
Insulation resistance	≥1000MΩ
Dielectric strength	1890VAC/50Hz/60s
Vibration resistance	50Hz,Amplitude 1.2mm
Shock resistance	> 10g
Solder heat resistance	when 320°C(or 30W electric iron),no more than 3 seconds
Switch rating	250V/18A
Mechanical life	≥1,000,000times
Electrical life	≥100,000times
Nut torque	about 0.6Nm
Operation stroke	about 2mm
Operating pressure	about 3N

CONTACT DESCRIPTION

Type	NO	NC
Diagram		
Sign		
Note	Double break-points with two terminals slow contact switch	

CONTACT DESCRIPTION



1. LED terminal size is 2.8×0.5;Contact terminal size is 4.8×0.8.
2. +- terminal is led pin.
3. 3-NO-4 terminal is NO contact;1-NC-2 terminal is NC contact.

IMPLICATION OF TYPE


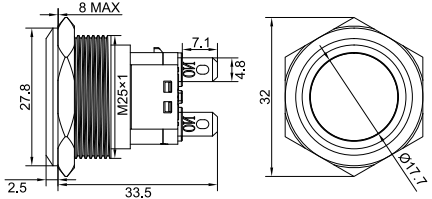

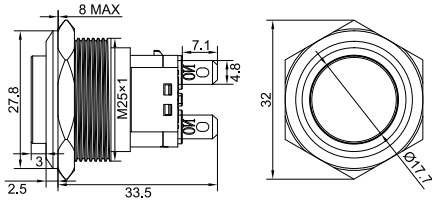

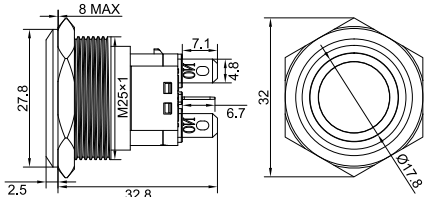

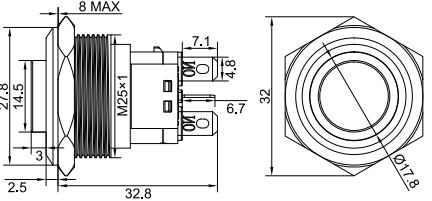

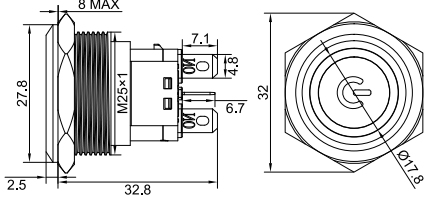
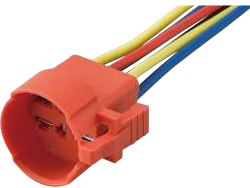
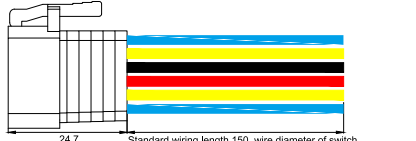
YJ-GQ25A	★	-○	▲/	☆	△	○
Code of series	Head shape: F: flat round H: high round	Contact: 11:1NO1NC 20:2NO 10:1NO 01:1NC	Operation: No letters : momentary Z:maintained E:momentary with ring lamp EZ:maintained with ring lamp EP:momentary with ring lamp and luminous power logo EZP:maintained with ring lamp and luminous power logo	Shell material: S : stainless steel A:aluminum alloy plating	Lamp voltage: 3V 6V 12V 24V 36V 48V 110V 220V	Color : R ● G ● Y ● B ● W ○

Note: the above table is only for model explanation, and some model combinations have no actual products. See the following figure for specific products.

Metal Button $\Phi 25$

AP25A Series High Current Metal Button

PRODUCT SELECTION

☉ Contact 11:1NO1NC ; 20:2NO ; 10:1NO ; 01:1NC		☆ shell material S: Stainless steel / A: Aluminum alloy plating		△ LED voltage 1.8V, 3V, 6V, 12V, 24V, 36V, 48V, 110V, 220V		○LED color R G Y B W		
Picture	Operation	Model	Shape Dimensions					
	Flat, momentary	AP25AF-☉/☆						
	Flat, maintained	AP25AF-☉Z/☆						
	High, momentary	AP25AH-☉/☆						
	High, maintained	AP25AH-☉Z/☆						
	Flat, momentary ring lamp	AP25AF-☉E/☆△○						
	Flat, maintained ring lamp	AP25AF-☉EZ/☆△○						
	High, momentary ring lamp	AP25AH-☉E/☆△○						
	High, maintained ring lamp	AP25AH-☉EZ/☆△○						
	Flat, momentary ring lamp with luminous power logo	AP25AF-☉EP/☆△○						
	Flat, maintained ring lamp with luminous power logo	AP25AF-☉EZP/☆△○						
	AP22A Socket		 <p>Standard wiring length 150, wire diameter of switch is 1m², wire diameter of led is 0.5m²</p> <p>Note: the red and black lines are LED lines, 1NO contact with two blue wires; 1NC contact with two yellow wires; You can consult the customized line length.</p>					
	Matching button with no light and one contact : 2 lines							
	Matching button with no light and two contacts: 4 lines							
	Matching button with light and one contact : 4 lines							
		Matching button with light and two contacts: 6 lines						

COMBINATION DIAGRAM OF BUTTON AND SOCKET

