

Vlogger Kit 1 >>> User Manual


Thank you for choosing SYNCO product.
Please read this manual carefully before use and follow all instructions mentioned herein.

Caring For Your SYNCO Product

- Please keep the product in a dry, clean, dust-free environment.
- Keep corrosive chemicals, liquids and heat source away from the product to prevent mechanics damage.
- Use only a soft and dry cloth for cleaning the product.
- Malfunction may be caused by dropping, impact of external force.
- Do not attempt to disassemble the product. Doing so voids warranty.
- Please have the product checked or repaired by authorized technicians if any malfunctions happened.
- Failure to follow all the instructions may result in mechanics damage.
- Warranty does not apply to human errors.


Microphone Usage

1. Insert the microphone body into the shock mount. Make sure it is secure and well-balanced.
2. Install the windshield to the front of the microphone body.


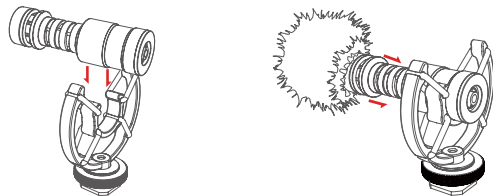


Kit Installation

The video rig provides three cold shoe mounts and four 1/4" threads for attaching microphones, video lights and tripod.

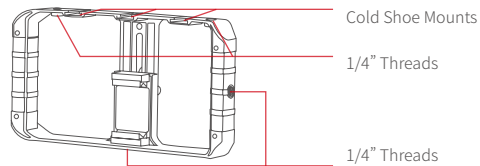


1. Attach the tripod to the 1/4" thread on the bottom for horizon filming or to that on the right side for vertical filming.
2. Unscrew the knob on the back of the rig to expand the phone clamp.
3. Place the smartphone into the clamp and adjust it.
4. Screw the knob tightly to fix the smartphone.
5. Install the microphone and the video light on the cold shoe mounts.
6. Connect the microphone with your phone via the 3.5mm TRRS phone cable.

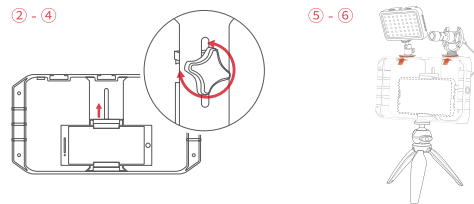


Video Light Instructions

- ① Power & Mode Switch Button
Long press this button to turn on/off the product.
When the product is on, short press this button to switch between 2 light modes, CCT Mode and EFF Mode.
- ② Display Screen
- ③ Dial
Press down the dial to choose the option to be adjusted.
Roll the dial upwards to increase the value, and downwards to decrease the value.




- ④ Type-C Charging Port
- ⑤ 1/4" Screw Hole
- ⑥ Magnetic Back
Used for attaching the light to smartphones with the metal plate.



Video Light Interface


CCT Mode

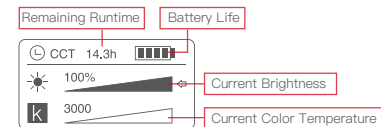

In CCT Mode, you can choose to adjust brightness or color temperature by pressing down the dial.

Increase or decrease the brightness and color temperature by rolling the dial upwards or downwards.

EFF Mode

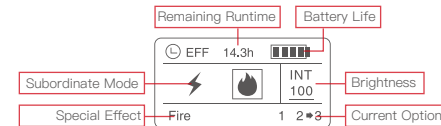

In CCT Mode, press the mode switch button once to enter EFF Mode.

Press down the dial to switch among subordinate mode, brightness and special effect, and roll the dial to adjust.

Subordinate Mode: Lightning and Fire

Each mode contains 3 special effects, amount to 6 special effects.

Specifications

Microphone

Transducer	Condenser
Polar Pattern	Cardioid
Frequency Response	100Hz-20KHz/ ±3dB
Signal/Noise	>60dB
Max. SPL	130dB@1KHz, 1%THD
Sensitivity	-35dB re 1 Volt/pasal(18.00mV@94dB SPL) +1/-2dB@1KHz
Power Requirement	Plug-in Power
Connector	3.5mm TRS/3.5mm TRRS
Dimensions	Φ21.5x 72mm
Net Weight	35g

LED Video Light

Color Rendering Index	Ra≥95
Color Temperature Range	2700K-6500K (±100K)
Illumination	1500Lux (at 30cm 6500K)
Number of Bead	48 pieces
Battery Capacity	2100mAh
Power	5W
Runtime	100% brightness for about 90 minutes
Input Voltage	5V/1A
Charging Port	Type-C
Charging Time	2.5H
Body Material	Plastic
Weight	110g
Dimension (mm)	110*65*15 (L*W*H)

Video Rig

Material	Plastic
Color	Black
Dimension	25*13*3.5 cm

Warranty

Warranty Period

Thank you for purchasing SYNCO products.

1. Customers are entitled to free replacement or repair service in case of quality defect(s) found in the product under normal use within 30 days upon receipt of the product.

2. Original SYNCO products are entitled to **12-month** limited warranty service. The warranty period begins on the date of purchase of brand new, unused products by the first end-user.

Within the warranty period, if product defect or failure is attributable to material deflection or technological problem, the defective product or defective part will be repaired or replaced without charge (service and materials fee).

Warranty Exclusions and Limitations

- Faults resulted from inappropriate use of a product without following its operation specification
- Artificial damage, e.g. crash, squeeze, scratch, or soaking
- Modifications to a product by its user or a third party without prior written consent of SYNCO, e.g. replacement of element or circuit, label alteration
- The code on product is inconsistent with that of warranty certificate, or the code on the product or warranty certificate is altered or torn off
- All consumable accessory attached to a product, like cable, wind muff, battery
- Faults as a result of force majeure, such as fire, flood, lightning, etc.

Warranty Claim Procedure

- If failure or any problem occurs to your product after purchase, please contact a local agent for assistance, or you can always contact SYNCO's customer service through email at support@syncoaudio.com.
- Please retain your sales receipt and warranty certificate as proof of purchase. If any of these documents is missing, only sales return or chargeable service will be provided.
- If the SYNCO product is out of the warranty coverage, the service and the parts cost will be charged.

WARRANTY CERTIFICATE

Please register your warranty. Meanwhile, you are welcomed to contact us via Email: support@syncoaudio.com

USER INFORMATION	Customer Name:
	Phone Number:
	Email:
SALES INFORMATION	Address:
	Sales Date:
	Model:
	Product Code:
REPAIR RECORD	Dealer:
	Service Date:
	Technician:
	Issue:

RESULT

Solved

Unsolved

Returned(Replaced)

Guangzhou Zhiying Technology Co., Ltd

📍 Block 15th, No.200 Fangcun Avenue East, Liwan District, Guangzhou, China, 510000

✉ support@syncoaudio.com

🌐 www.syncoaudio.com

🌐 <https://www.facebook.com/syncomicrophones>

