


Datasheet

2.92mm Male to 1.85mm Female Adapter, DC - 40GHz

2.92/1.85-JKS



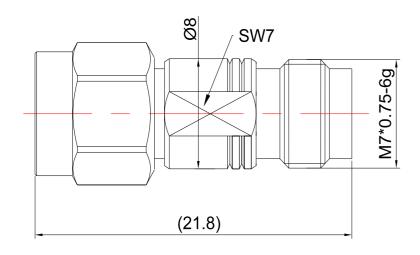

Dimensions are in mm

| — • | | ~ · · · · | | |
|-------------|-----|------------------|-------|-------|
| Prod | uct | Cont | idura | ition |

Connector 1 Series 2.92mm Standard Connector 1 Polarity Connector 1 Gender Male Connector 1 Impedance (Ohm) 50 Connector 1 Mount Method None 1.85mm Connector 2 Series Connector 2 Polarity Standard Female Connector 2 Gender Connector 2 Impedance (Ohm) 50 Connector 2 Mount Method None

Mechanical Data

Connector 1 Body Material Stainless Steel
Connector 1 Body Plating Passivated
Connector 2 Body Material Stainless Steel
Connector 2 Body Plating Passivated
Mating Cycles, Min ≥500
Weight (g) 3.9 g

Electrical Specifications

Frequency DC-40GHz VSWR 1.15

Insertion Loss ≤0.05 xSqt.(f_GHz)

Enviromental Specifications

RoHS Compliant Yes

Operating Temperature -55 °C to +165 °C

Range

MIL/STD N/A

(I) (888)251-2240

sales@gwavetech.com