


## 2.92MM ATTENUATOR

## 2.92-CA1XX

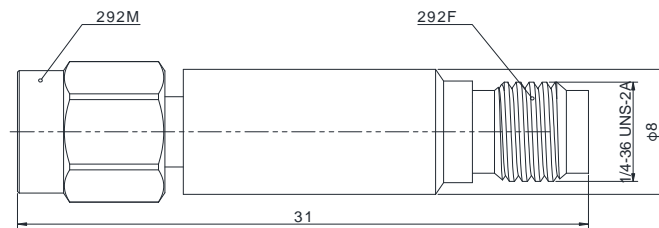

Dimensions are in mm

## Configuration

Connector	2.92mm Male-Female
Connector Impedance	50 Ohms

## Electrical Specifications

Product No.	Frequency (GHz)	Attenuation Value (dB)	Attenuation Accuracy (dB)	VSWR	Average Power (W)
2.92-CA101	DC-40	1	+/-0.8	1.35	2 @25°C
2.92-CA102	DC-40	2	+/-0.8	1.35	2 @25°C
2.92-CA103	DC-40	3	+/-0.8	1.35	2 @25°C
2.92-CA104	DC-40	4	+/-0.8	1.35	2 @25°C
2.92-CA105	DC-40	5	+/-0.8	1.35	2 @25°C
2.92-CA106	DC-40	6	+/-0.8	1.35	2 @25°C
2.92-CA107	DC-40	7	+/-0.8	1.35	2 @25°C
2.92-CA108	DC-40	8	+/-0.8	1.35	2 @25°C
2.92-CA109	DC-40	9	+/-0.8	1.35	2 @25°C
2.92-CA110	DC-40	10	+/-0.8	1.35	2 @25°C
2.92-CA115	DC-40	15	+/-1.0	1.35	2 @25°C
2.92-CA120	DC-40	20	+/-1.0	1.35	2 @25°C
2.92-CA130	DC-40	30	+/-1.5	1.35	2 @25°C

## Materials Information

Center Contact	CuBe Gold Plated
Outer Contact	Brass Gold Plated
Body	Stainless Steel
Dielectric	PEI

## Environmental Data

Temperature Range	-55°C to +125°C
RoHS	Compliant